



Front



Top



Braille Indicator Description

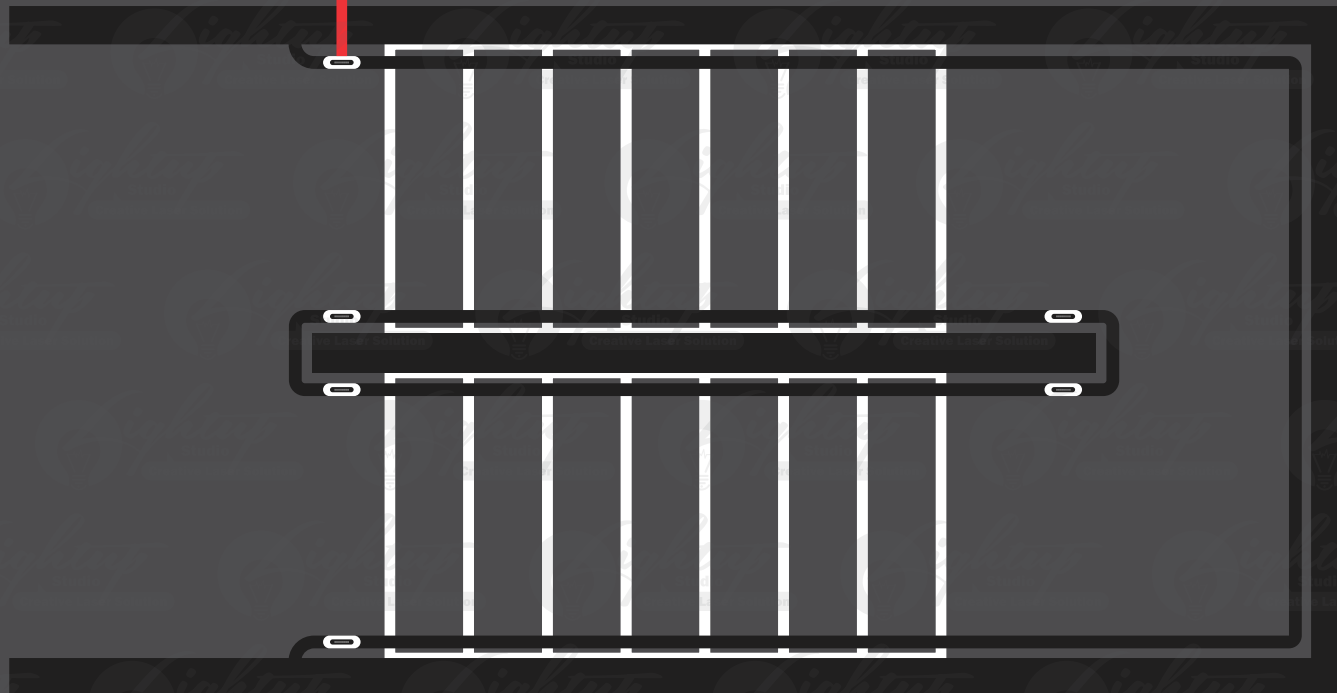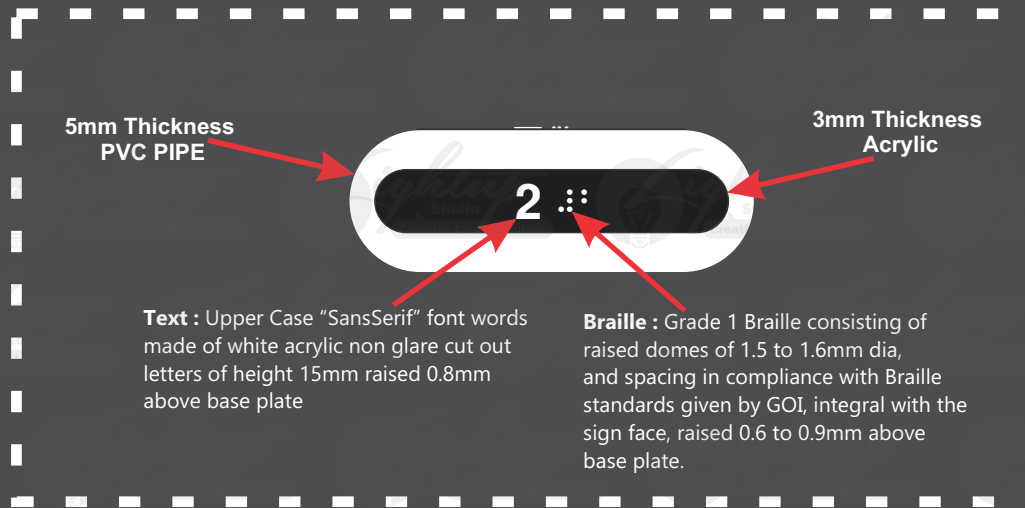

L Grab Bar & U Grab Bar (Stainless Steel)



Benefits :

- Can be fitted anywhere as per uses requirements.

Use : Indoor

Specifications :

Type of grab bar : L Shaped Disabled Grab Bar

Material : SS 304

Dimensions : Outer diameter: 32mm, thickness 1.5mm. Available in the following sizes - 300mm x 600mm, 600mm x 600mm, 900mm x 600mm



Benefits :

- It enables people to get up and sit down on their own by using their arm strength.
- It can be folded against wall and locks vertically when not in use.

Use : Indoor

Specifications :

Type of grab bar : Flip Down Handicap Grab Bar


Material : SS 304

Dimensions : Outer diameter: 32mm, thickness 1.5mm. Available in the following lengths - 600mm x 700mm



Figure 5-22: Glass door markings

800mm
-1000mm

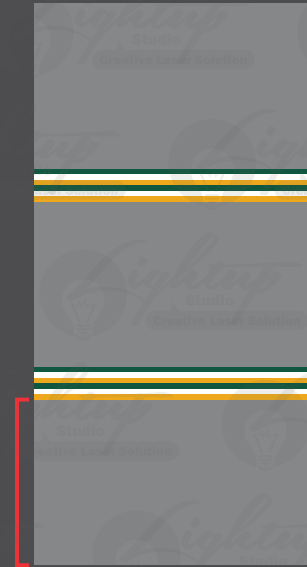

1400mm
-1600mm



The presence of a glass door should be made apparent, with permanent manifestation at two levels, within 800mm to 1000 mm from the floor and within 1400 mm to 1600 mm from the floor (Figure 5-24), contrasting visually with the background seen through the glass in all light conditions. The edges of a glass door should also be apparent when the door is open. Note : If a glass door is adjacent to, or is incorporated within, a fully glazed wall the door and wall should be clearly differentiated from one another, with the door more prominent. To achieve this, the door may be framed on both sides and the top by an opaque high - contrast strip at least 25 mm wide.

Braille Tactile Evacuation Maps

Front



Side



Benefits :

- Braille text includes people with visual impairments to read the sign.
- Helps to identify accessible facilities in a building.
- The design of the signage make it conspicuous and easy to identify.
- The symbol on the signage enables unschooled people to comprehend it.

Use : Indoor

Specifications :

Material : Auto Glow Acrylic

Size : Customize

Base Plate : 3mm Thick Acrylic Non Glare

Text : Upper Case "SansSerif" font words made of white acrylic non glare cut out letters of height 15mm raised 0.8mm above base plate

Symbol : Black cut out acrylic and raised by 1 to 2mm above base plate.

Braille : Grade 1 Braille consisting of raised domes of 1.5 to 1.6mm dia, and spacing in compliance with Braille standards given by GOI, integral with the sign face, raised 0.6 to 0.9mm above base plate.

Fixing Mechanism : Mirror screws

3mm
Acrylic

3mm Auto Glow
Acrylic