



**RAJESHWARI
ENTERPRISES**



HYDRAULIC & PNEUMATIC PROTECTION CATALOGUE



CONTENTS

HYDRAULIC AND PNEUMATIC PROTECTION

● HDPE SPIRAL GUARD	4
● TEXTILE SLEEVING	5
● FIRE SLEEVES	7
● FIRE SLEEVES WITH VELCRO	8
● LDPE HOSE SPIRAL WRAP	10
● HOSE BINDING STRIP	10
● HOSE PLUG	11
● NYLON CABLE TIES	12
● HOSE CLAMPS	13
● CAPS & PLUGS	14
1-Tapered Caps/Plugs	
2-Wide Flange Caps/Plugs	
3-Tapered Caps/Plugs-Large Flange Range	
4-Centre Pull Tab Plugs	
5-Tapered Plug with Ring Tab	
6-Snap-Fit Plugs	
7-Straight Pull Plugs	
8-Barrel Plugs	
9-Moss Plugs	

About Us

RAJESHWARI ENTERPRISES established in 2014 based out in the center of India's high-tech industry city Bangalore, Karnataka.

RE is the leading distribution company for various high quality Industrial Components to support manufacturer that helps to make the operation run smoothly.

We have a dedicated and experienced team to give challenges for changing trend and technology.

Rajeshwari Enterprises provides the small yet vital components that help keep the industry moving. And we help it move smoother, smarter and faster by distributing one of the world's most extensive ranges of protection and finishing products.

We know reliability, flexibility, consistent quality products matter to you. That's why, we bring the best products, ideas and distribution in one unrivaled package. Our reliable service is always at your doorstep.

With our massive range of products in Hydraulics & Pneumatics, Electronics, Electrical, Automobile, Machine Tool, Telecommunication, Energy, Speciality vehicles we will have just what you are looking for.



Vision

To become a trusted leader in manufacturing and partner in product distribution, delivering high-quality products and empowering brands to reach every customer efficiently and reliably, while driving sustainable growth and innovation across the supply chain.

Mission

Our mission is to manufacture and distribute products that meet the highest standards of quality and reliability. To provide seamless, reliable, and innovative distribution solutions that connect products to customers. We are dedicated to building lasting partnerships, ensuring customer satisfaction, and deliver exceptional value to our clients.



Welcome to Rajeshwari enterprises

WHY RAJESHWARI ENTERPRISES?

Over 10000 standard quality products Quick delivery of a wide range. All products available under one roof

Quick Dispatch

We understand you needs

Complete Service

Free samples / Technical support/ Drawings/
Quality Documents

Customer solution

Product solutions with added value


International Quality with Local Service

We provide you the best quality products and service

Our Key Markets




TELECOMMUNICATION



ELECTRIC
VEHICLE



MACHINE
TOOL



ELECTRIC
& ELECTRONICS



ENERGY



AUTOMOTIVE



LOGISTICS




CAMv

(construction, agriculture & mining vehicles)

Technical Data

Material	HDPE (High-Density Polyethylene)
Operating Temp	-40°C To +130 °C
Sizes	12mm to 140mm
Flammability	Highly UV resistant
Color	Black, Other Colours on Request
Approval	ROHS, UV, CE, REACH,MSHA, FRAS
Roll Length	20Mtr / 50Mtr

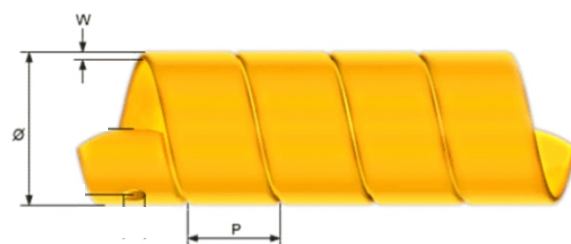

It provides good anti-crushing property and shows high resistance to abrasion and UV rays. It is flexible in structure and it is easy to fit and supports for risk of industrial injury as well be It can continue working at +90°C. We supply this material in conveniently rolled and packed. cartons which supports for easy storage also

Applications and Benefits of Spiral guard Suits:

- ✓ flexible for fixing and removing. Provides good protection and It is flexible for fixing and removing.
- ✓ Provides good protection and prevents from injury risks in industries.
- ✓ Heavy duty hose wrap & flexible and easy-to-install
- ✓ Highly UV resistant, tolerate both frost and heat & Long lasting hose protection
- ✓ We supply standard product in 20 & 50 meter rolls.



DISCRIPTION	PART NUMBER	INCHES (OD)	OD (D)mm	ID (d)mm	Wall Thickness (mm)	PITCH (mm)	Recommended Range (mm & inch)	SPQ IN MTR	MOQ IN MTR
HDPE Spiral Guard	RESG12-50	1/2"	12	9	1.5	10	9mm- 13mm 0.35-0.51"	50	500
HDPE Spiral Guard	RESG16-50	2/3"	16	12.6	1.7	12	13mm - 18mm 0.51-0.71"	50	500
HDPE Spiral Guard	RESG20-50	3/4"	20	16	2.0	16	16mm - 22mm 0.63-0.87"	50	500
HDPE Spiral Guard	RESG25-50	1"	25	20.6	2.2	20	20mm - 27mm 0.78-1.06"	50	500
HDPE Spiral Guard	RESG32-50	1 1/4"	32	27	2.5	22	27mm - 36mm 1.06-1.42"	50	500
HDPE Spiral Guard	RESG40-50	1 3/5"	40	34.6	2.7	27	34mm - 44mm 1.34-1.73"	50	500
HDPE Spiral Guard	RESG50-20	2"	50	44	3.0	30	43mm - 55mm 1.69-2.16"	20	200
HDPE Spiral Guard	RESG63-20	2 1/2"	63	55.4	3.8	37	55mm - 67mm 2.16-2.64"	20	200
HDPE Spiral Guard	RESG75-20	3"	75	66	4.5	42	66mm - 80mm 2.60-3.15"	20	200
HDPE Spiral Guard	RESG90-20	3 1/2"	90	80	5.0	45	80mm - 98mm 3.15-3.86"	20	200
HDPE Spiral Guard	RESG110-12	4 1/3"	110	99	5.5	50	99mm - 115mm 3.90-4.53"	12	120
HDPE Spiral Guard	RESG125-12	4 9/10"	125	113	6.0	55	113mm - 130mm 4.45-5.12"	12	120
HDPE Spiral Guard	RESG140-09	5 1/2"	140	128	6.0	55	125mm - 145mm 4.92-5.70"	9	90



Technical Data

Material	Nylon 6 Multifilament Yarn & Polyester Multifilament
Operating temp	-65°C to +150°C
Sizes	17mm to 112mm
Flammability	Flame Resistant
Color	Black
Approval	ROHS, UL, CE, REACH,MSHA, FRAS



FEATURES

- ✓ Flexible & Light Weight
- ✓ Excellent Noise suppression
- ✓ Flame Retardant

- ✓ High level abrasion Protection and burst resistant
- ✓ Mechanical & Chemical Resistance
- ✓ Oil Resistance
- ✓ Wear resistance > 200000 Cycles in the abrasion test

PART NUMBER	ID (MM)	FLAT WIDTH (MM)	THICKNESS (MM)	SPQ (MTR)	OUTER BOX QTY (MTR)
RETS-17-B	17	30	0.8	50	350
RETS-20-B	20	36	0.8	50	350
RETS-23-B	23	40	0.8	50	350
RETS-25-B	25	43	0.8	50	350
RETS-27-B	27	45	0.8	50	350
RETS-31-B	31	52	0.8	50	350
RETS-33-B	33	55	0.8	50	350
RETS-36-B	36	60	0.8	50	250
RETS-40-B	40	66	0.8	50	250
RETS-44-B	44	74	0.8	50	250
RETS-47-B	47	77	0.8	50	250
RETS-53-B	53	86	0.8	50	200
RETS-55-B	55	90	0.8	50	200
RETS-60-B	60	98	0.8	50	200
RETS-66-B	66	106	0.8	50	150
RETS-73-B	73	118	0.8	50	150
RETS-78-B	78	126	0.8	50	150
RETS-85-B	85	136	0.8	50	150
RETS-93-B	93	150	0.8	50	50
RETS-112-B	112	178	0.8	50	50


TECHNICAL CHARACTERISTICS

Sl. No	PROPERTIES	REF. SPECIFICATIONS	RESULT
1	Temp. Rating	240Hrs for 175°C	Pass
2	Fluid Resistance	SAE J 2192	Visually no sign of degradation or no changes
3	Abrasion Resistance	SAE J 2192	
4	Flammability	SAE J 2192	Pass
5	Melting Point	ISO 6945	92,400 Cycles
6	Temp. / Humidity Cycle	ASTM D 3418	+230°C
7	Low Temp. Flexibility	FMVSS 302 SAE J 369	Self-Extinguishable

HYDRAULIC HOSE PROTECTOR

TECHNICAL DATA

Material	Fiberglass Multifilament and Silicone
Thermal Class	"H" Class
Operating Temp	"-60°C To +260°C (-76°F - +500°F) 1093°C (2000°F for Max. 30 Mins) upto 1650°C (3000°F for Max. 30 Sec)"
Sizes	6mm to 100mm
Dielectric Strength	10000 Volts
Flammability	VW – 1 and MSHA
Standard Color	Brick Red & Black
Approval	ROHS, UL, CE, REACH



FEATURES

- ✓ Superior Electrical Properties
- ✓ Excellent Low Temperature Flexibility
- ✓ Flame Retardant and Insulation performance
- ✓ High level Thermal Protection

- ✓ Mechanical & Chemical Resistance
- ✓ Oil Resistance
- ✓ Halogen Free
- ✓ High Flexibility




PART NUMBER	(ID) - mm	Wall Thickness	SPQ (MTR)
REFS-6-K-R	6mm	2.5MM	25
REFS-8-K-R	8mm	2.5MM	25
REFS-10-K-R	10mm	2.5MM	25
REFS-12-K-R	12mm	2.5MM	25
REFS-14-K-R	14mm	2.5MM	25
REFS-16-K-R	16mm	2.5MM	25
REFS-18-K-R	18mm	2.5MM	25
REFS-20-K-R	20mm	2.5MM	25
REFS-25-K-R	25mm	2.5MM	25
REFS-30-K-R	30mm	2.5MM	25
REFS-35-K-R	35mm	2.5MM	25
REFS-40-K-R	40mm	2.5MM	25
REFS-45-K-R	45mm	2.5MM	25
REFS-50-K-R	50mm	2.5MM	25
REFS-55-K-R	55mm	2.5MM	25
REFS-60-K-R	60mm	2.5MM	25
REFS-70-K-R	70mm	2.5MM	25
REFS-80-K-R	80mm	2.5MM	25
REFS-90-K-R	90mm	2.5MM	25
REFS-100-K-R	100mm	2.5MM	25

• OTHER COLORS ON REQUEST

TECHNICAL DATA

Material	Fiberglass Filament and Silicone Resin
Thermal Class	"H" Class
Operating Temp	-60°C to +260°C (Peak +1093°C for 15 - 20 Mins)
Sizes	6mm to 100mm
Dielectric Strength	10000 Volts
Flammability	VW - 1
Standard Color	Brick Red & Black
Approval	ROHS, UL, CE, REACH



FEATURES

- ✓ Superior Electrical Properties
 - ✓ Excellent Low Temperature Flexibility
 - ✓ Flame Retardant and Insulation performance
 - ✓ High level Thermal Protection
- ✓ Mechanical & Chemical Resistance
 - ✓ Oil Resistance
 - ✓ Halogen Free
 - ✓ High Flexibility



PART NUMBER	(ID) - mm	Wall Thickness	SPQ (MTR)
REFS-6-K-R	6mm	2.5MM	25
REFS-8-K-R	8mm	2.5MM	25
REFS-10-K-R	10mm	2.5MM	25
REFS-12-K-R	12mm	2.5MM	25
REFS-14-K-R	14mm	2.5MM	25
REFS-16-K-R	16mm	2.5MM	25
REFS-18-K-R	18mm	2.5MM	25
REFS-20-K-R	20mm	2.5MM	25
REFS-25-K-R	25mm	2.5MM	25
REFS-30-K-R	30mm	2.5MM	25
REFS-35-K-R	35mm	2.5MM	25
REFS-40-K-R	40mm	2.5MM	25
REFS-45-K-R	45mm	2.5MM	25
REFS-50-K-R	50mm	2.5MM	25
REFS-55-K-R	55mm	2.5MM	25
REFS-60-K-R	60mm	2.5MM	25
REFS-70-K-R	70mm	2.5MM	25
REFS-80-K-R	80mm	2.5MM	25
REFS-90-K-R	90mm	2.5MM	25
REFS-100-K-R	100mm	2.5MM	25

* OTHER COLORS ON REQUEST

TECHNICAL CHARACTERISTICS

Sl. No	PROPERTIES	REF. SPECIFICATIONS	RESULT
1	Temp. Rating	ASTM D 3418 +400°C	No cracks or detachment of coating shall be visible and the original colors shall be clearly recognizable
2	Cold Resistance	UL 1441 IEC 60684	No cracks or detachment of coating shall be visible.
3	Chemical Resistance	Simulation of real operating conditions	Compatible with most insulating varnishes and transformer oils
4	Flammability	Flame propagation: IEC60684 Part2 Clause 26. Method B Vertical without mandrel UL 1441, UL 94	Extinguishes within 60 seconds. Self-Extinguishable V-0
5	Thermal Conductivity	ASTM E 1530	0.10 w/m k
6	Hydrolysis of Coating	IEC 60684	There shall be no burning of the coating or any sign of decolorization of the Sleeving Coating.
7	Bending (Flexibility) (Low Temp./Ageing/ Max. Temp.)	IS 7016	Pass - No cracks or detachment of coating shall be visible and the original colors shall be clearly recognizable

LDPE HOSE SPIRAL WRAP

Technical Data


Material	LDPE (Light-Density Polyethylene)
Operating temp	-50°C To +100 °C
Color	Black,
Approval	ROHS, CE, REACH
Roll length	50 mtr



Applications and Benefits

Black PE

- ✓ Lightweight protective wrap
- ✓ Provides cost-effective hose and cable protection
- ✓ Operating temperature for the LDPE Material is 100 °C.

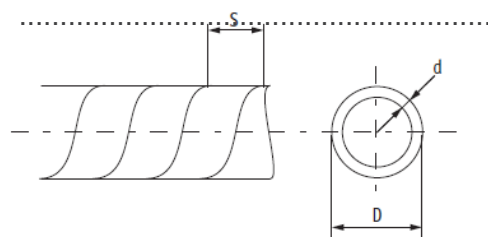

DISCRIPTION	PART NUMBER	OD (D)mm	Id MM	WT (mm)	PITCH (mm)	HOSE RANGE Dia (mm)	SPQ (MTR)
Spiral Wrap	RESW-12-H-B	12.0	10.0	1.0	16.0	12 to 15	50
Spiral Wrap	RESW-15-H-B	15.0	12.6	1.2	20.0	15 to 20	50
Spiral Wrap	RESW-19-H-B	19.0	16.0	1.5	22.0	19 to 23	50
Spiral Wrap	RESW-25-H-B	25.0	21.0	1.5	25.0	24 to 30	50
Spiral Wrap	RESW-32-H-B	32.0	27.0	2.0	22.0	27 to 36	50
Spiral Wrap	RESW-40-H-B	40.0	34.6	2.0	27.0	34 to 44	50

NOTE :-

- All outer and inner dimensions are nominal
- Wall thickness tolerance +/- 0.3 mm
- Pitch tolerance +/- 2.0 mm

HOSE BINDING STRIP

Properties

- ✓ Material Nylon and Polyester with quick- release buckle
- ✓ Band width 25MM
- ✓ UV- Protected
- ✓ Flame retardant available
- ✓ Resistant to acids, oil and solvents
- ✓ Color Black




TECHNICAL DATA

Material	Nylon & Polyester
Operating temp	-50°C To +100 °C
Color	Black,
Approval	ROHS, CE, REACH,MSHA,

DISCRIPTION	PART NUMBER	LENGTH (mm)	SPQ
Binding Strip	REHS-500	500	500 NOS
Binding Strip	REHS-1000	1000	500 NOS
Binding Strip	REHS-1500	1500	500 NOS
Binding Strip	REHS-2000	2000	500 NOS



HOSE PLUG

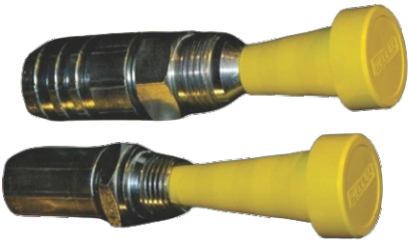


Hose Plug rubber compound is silicone free and highly resistant to many chemicals, acids and other aggressive fluids.

Applications and Benefits:

- ✓ All Plug types for Multiple application usage
- ✓ Keep out of reach of children
- ✓ Temperature range:
-25 °C to +90 °C (-13 F to +194 F)

- ✓ Resistant to most oils and chemicals
- ✓ For non-pressurised systems only
- ✓ Always clean before reuse
- ✓ Does not contain silicone

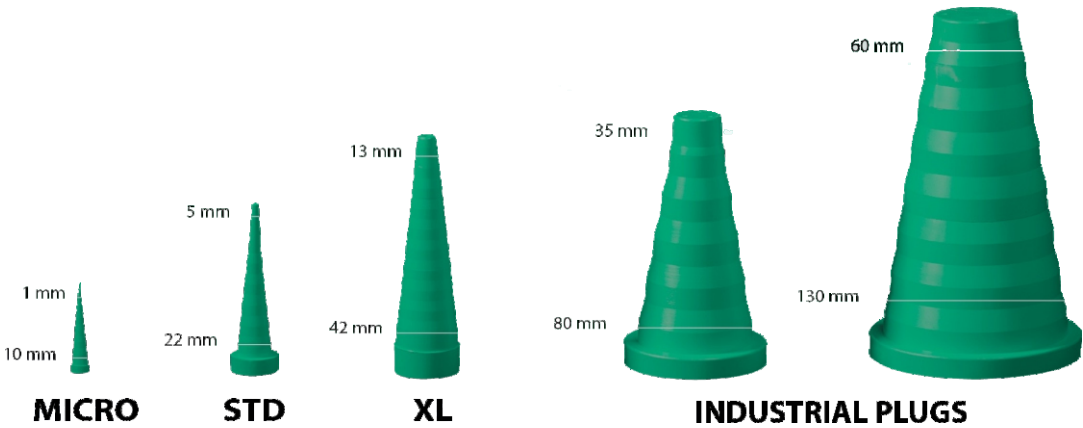

HOW TO



1 Insert 2 Push 3 Push & twist

DISCRIPTION	PART NUMBER	SIZE	PACK	PIECES/KIT	MOQ
Hose plug	RE - MICRO	1 mm-10 mm	Micro box	20 Nos	2 kit
Hose plug	RE - STD	5 mm-22 mm	Standard box	10 Nos	2 kit
Hose plug	RE- XL	13 mm-42 mm	XL box	4 Nos	5 Kit
Hose plug	RE - Mix	1 mm-42 mm	Mix box	4+4+2 Nos	5 Kit

HYDRAULIC HOSE PROTECTOR

NYLON CABLE TIES



TECHNICAL DATA

Material	Nylon
Operating temp	-10°C to +85°C
Color	Natural & Black other Colour make on order
Approval	CE, ROHS, Halogen Free




PART NUMBER	SIZE (mm)	LENGTH (mm)	WIDTH	TENSILE STRENGTH		SPQ	MOQ/BOX
				KGS	LBE		
RECT100X1.8	100 X 1.8	100	1.8	6	14	100 NOS	650 PKT
RECT100X2.5	100 X 2.5	100	2.5	8	18	100 NOS	600 PKT
RECT150X2.5	150 X 2.5	150	2.5	8	18	100 NOS	300 PKT
RECT150X3.6	150 C 3.6	150	3.6	18	40	100 NOS	250 PKT
RECT200X2.5	200 X 2.5	200	2.5	8	18	100 NOS	250 PKT
RECT200X3.6	200 X 3.6	200	3.6	18	40	100 NOS	200 PKT
RECT200X4.8	200 X 4.8	200	4.8	22.7	50	100 NOS	150 PKT
RECT250X3.6	250 X 3.6	250	3.6	18	40	100 NOS	170 PKT
RECT250X4.8	250 X 4.8	250	4.8	22.7	50	100 NOS	150 PKT
RECT300X3.6	300 X 3.6	300	3.6	18	40	100 NOS	140 PKT
RECT300X4.8	300 X 4.8	300	4.8	22.7	50	100 NOS	120 PKT
RECT350X4.8	350 X 4.8	350	4.8	22.7	50	100 NOS	100 PKT
RECT400X4.8	400 X 4.8	400	4.8	22.7	50	100 NOS	100 PKT
RECT450X4.8	450 X 4.8	450	4.8	22.7	50	100 NOS	90 PKT

T-BOLT CLAMPS

Stainless Steel (AISI 430 / W2)


- ✓ Clamp conforms to DIN 3017
- ✓ Strong construction with full bushings
- ✓ Secures pipes and hoses at high pressure

PART NUMBER	CLAMPING RANGE (mm)	BAND WIDTH (mm)	BOLT SIZE	STD PACK QTY
REC- 600480	17-19	18.0	M5x40	100
REC- 600481	20-22	18.0	M5x40	100
REC- 600482	23-25	18.0	M5x40	100
REC- 600483	26-28	18.0	M5x40	100
REC- 600484	29-31	20.0	M6x50	100
REC- 600485	32-35	20.0	M6x50	50
REC- 600486	36-39	20.0	M6x50	50
REC- 600487	40-43	20.0	M6x50	50
REC- 600488	44-47	22.0	M6x60	50
REC- 600489	48-51	22.0	M6x60	50
REC- 600490	52-55	22.0	M6x60	50
REC- 600491	56-59	22.0	M6x60	50
REC- 600492	60-63	22.0	M8x60	50
REC- 600493	64-67	22.0	M8x70	50
REC- 600494	68-73	24.0	M8x70	50
REC- 600495	74-79	24.0	M8x70	50
REC- 600496	80-85	24.0	M8x75	25
REC- 600497	86-91	24.0	M8x75	25
REC- 600498	92-97	24.0	M8x75	25
REC- 600499	98-103	24.0	M8x80	25
REC- 600500	104-112	24.0	M8x80	25

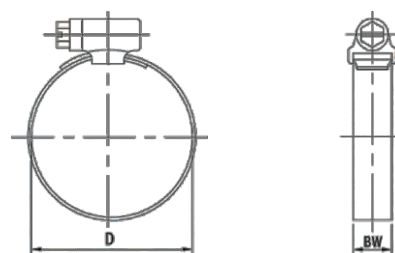

WORM-DRIVE HOSECLAMPS

Stainless Steel Band (AISI 430 / W2) Yellow Galvanised Steel Screw

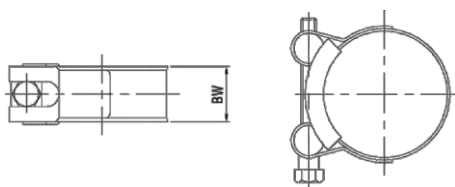

- ✓ Maximum tightening torque: 6.5 Nm
- ✓ Spotwelded house
- ✓ Solid band offers better hose protection than perforated alternative
- ✓ C7 Hexagonal screw




PART NUMBER		CLAMPING RANGE (mm)	AUTO CODE	STD PACK QTY
9MM BAND WIDTH	12MM BAND WIDTH			
REC- 600460	-	8-12	000	50
REC- 600461	-	10-16	M00	50
REC- 600462	-	12-20	0/0	50
REC- 600463	REC- 600473	16-25	0X	50
	REC- 600474	20-32	1A	50
-	REC- 600475	25-40	1	50
-	REC- 600476	32-50	1X	50
-	REC- 600477	40-60	-	50
-	REC- 600478	50-70	2A	50

TAPERED CAPS/PLUGS

SR1000
Red LDPE

- ✓ Use as cap or plug
- ✓ Easy fitting and removal
- ✓ Over 140 sizes
- ✓ Provide excellent protection from damage, dirt, moisture and corrosion during storage and transportation

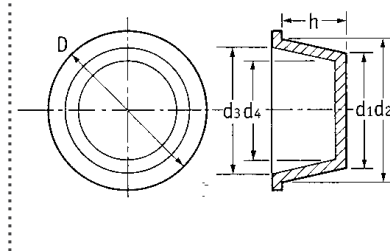

PART NUMBER	DIMENSIONS (mm)						STD PACK QTY
	d1	d2	d3	d4	D	h	
10836	2.9	4.6	3.0	1.3	7.9	9.5	10000
10991	4.4	6.1	4.5	2.8	9.5	9.5	10000
50222	4.7	8.5	5.7	2.5	11.7	22.5	10000
12419	5.6	7.0	5.4	4.0	10.5	8.4	10000
10727	6.2	7.6	5.9	5.0	11.1	9.5	10000
12482	7.7	9.3	7.0	5.5	12.7	8.0	10000
10549	7.7	9.1	7.7	6.3	12.7	9.5	10000
10289	8.4	10.0	8.2	6.9	13.5	9.5	10000
12562	8.6	10.3	8.2	7.0	13.7	9.8	10000
12483	9.0	10.7	8.8	7.5	13.9	11.5	10000
10325	9.4	10.8	9.3	7.7	14.0	8.5	10000
10750	10.0	11.8	10.0	8.5	15.0	9.5	10000
12420	10.6	12.2	10.0	8.6	15.6	9.8	10000
10114	10.9	12.3	10.7	9.1	15.9	9.3	10000
12421	11.2	14.0	12.1	9.2	17.5	18.5	5000
12422	11.3	12.9	10.9	9.4	16.3	8.5	10000
10421	11.3	13.2	11.6	9.8	17.0	11.0	10000
10174	11.5	13.0	11.5	10.0	16.7	9.5	10000
12901	12.0	14.8	12.0	10.5	17.5	11.0	5000
10237	12.1	13.9	12.3	10.6	17.5	11.0	5000
12563	12.5	14.0	12.0	10.5	17.5	8.9	5000
15137	12.8	15.1	13.2	10.7	18.5	23.1	4000
10438	13.6	15.3	13.7	12.1	19.0	11.2	5000
10342	14.2	16.0	14.4	12.7	19.0	12.1	5000
10424	14.7	17.0	15.4	13.2	20.6	12.7	5000
12481	14.9	16.4	14.5	13.5	21.0	11.5	5000
12423	15.5	17.1	15.0	13.4	20.6	8.5	5000
12564	16.1	17.6	15.5	14.5	21.0	8.5	5000
11139	16.4	18.3	16.9	14.3	22.2	12.3	5000
12196	16.6	18.5	16.5	14.5	21.9	13.0	6000
110197	17.1	19.4	17.8	15.5	22.0	13.0	6500
12197	17.2	20.2	18.0	15.5	24.2	18.0	4000
110198	17.5	20.1	18.5	15.9	24.0	14.5	5000
11088	17.7	19.6	17.3	15.2	22.2	12.7	5000
10394	17.8	20.0	18.3	16.4	23.8	13.4	5000
12424	18.3	21.4	19.3	16.4	25.4	17.5	4000
10208	18.5	20.9	19.3	17.1	24.6	14.3	5000
10728	19.0	21.5	19.7	17.6	25.8	14.3	4000
12925	19.4	22.5	21.3	18.0	26.5	19.0	3000
12425	20.5	23.2	21.2	18.5	27.2	17.5	3000
52071	21.2	23.2	21.7	19.3	27.3	12.3	4000
10676	21.3	23.2	21.5	19.2	27.0	15.9	3000
110200	22.0	24.8	23.2	20.4	29.0	17.0	3000
10376	22.0	25.0	23.0	20.5	28.5	15.9	3000
12565	22.5	25.5	23.3	20.0	28.9	17.8	3000
12426	22.7	24.9	22.7	20.8	27.0	12.0	3000
10136	23.4	26.4	24.4	21.4	29.3	17.5	2500
12427	24.0	26.9	25.0	21.9	31.0	18.0	2000
12567	24.6	29.5	27.5	22.5	34.0	27.5	1500
10732	24.7	27.7	26.1	23.2	32.0	19.0	2000
110201	25.2	29.2	27.7	23.7	33.0	19.0	1500
12999	26.6	29.7	28.3	24.6	31.6	26.3	1500
10250	28.0	30.9	29.0	26.5	35.3	19.0	2000
11173	29.2	31.2	30.3	28.0	34.7	12.7	2000
10272	30.0	32.6	30.7	27.5	36.7	15.2	2000
12428	30.5	33.3	31.1	28.4	37.0	14.5	2000


TO FIT THREAD SIZE	
AS CAP	AS PLUG
M4	1/4" UNF
M6	M8, 5/16" UNF
1/4" UNF	3/8" UNF
M8	M10
3/8" UNF	M12
1/8" BSP	1/4" BSP, 1/2" UNF
M12	9/16" UNF
7/16" UNF	M16
1/4" BSP, 1/2" UNF	3/8" BSP
M14	M18 x 1.5
M16, 5/8" UNF	3/4" UNF
3/8" BSP	M20 x 1.5
M18 x 1.5, M18 x 2	1/2" BSP
3/8" BSP	M20
M18	1/2" BSP
3/4" UNF	M22 x 1.5
	M22 x 1.5, 7/8" UNF
M20 x 2.5, 1/2" BSP	M24
M22 x 1.5	7/8" BSP
M22	1" UNF
7/8" UNF	M24
M24	3/4" BSP, M27, M26
M25, 1" UNF	M28, M30, 1 1/8" UNF
3/4" BSP	7/8" BSP
M27, M28	M30 x 1.5
M22 x 2	M33, 1" BSP
M30	1 5/16" x 12 UNF
7/8" BSP	

CONTINUED ON NEXT PAGE

TAPERED CAPS/PLUGS

SR 1000
Red LDPE

CONTINUED



PART NUMBER	DIMENSIONS (mm)						STD PACK QTY
	d1	d2	d3	d4	D	h	
12569	31.6	36.3	34.0	29.8	40.2	24.1	1000
11167	33.3	34.4	32.8	31.4	38.1	9.5	2500
10181	33.3	37.2	35.6	31.7	41.6	22.2	1000
12480	33.9	38.3	36.5	31.9	42.3	24.5	1000
10838	33.9	37.3	35.8	32.0	42.2	12.3	2000
12198	34.9	36.4	35.2	33.1	42.7	8.2	2500
12570	35.9	40.2	37.5	33.2	44.1	24.5	1000
15138	36.3	38.3	37.0	34.6	42.3	12.0	1500
10491	36.9	40.6	39.0	35.0	44.0	22.5	1000
11115	38.6	40.6	39.0	37.1	44.5	12.7	1500
10485	39.6	42.7	41.1	38.2	47.6	18.5	1000
12429	40.8	44.7	41.8	37.7	49.0	24.0	500
10252	41.4	44.8	43.0	39.7	49.2	19.0	1000
11172†	42.5	44.8	43.0	40.7	50.7	12.6	1000
15139	43.4	48.5	47.0	42.0	53.3	24.5	600
10812	44.1	46.7	45.7	42.8	49.8	18.4	800
110204	44.4	47.7	46.1	42.8	51.0	19.0	1500
10168	45.2	49.0	47.0	43.7	53.4	24.5	600
10439	45.9	46.3	45.0	44.3	50.8	9.5	1500
15136	46.0	50.0	48.0	44.3	54.0	24.8	500
12430	47.2	51.9	48.7	44.5	55.8	24.0	500
11131	47.5	50.3	49.0	45.2	54.0	25.0	500
10820	48.0	52.7	50.7	46.3	57.1	25.4	500
10086	48.6	51.2	48.9	46.7	55.5	18.7	500
12746	49.8	54.0	52.0	47.5	58.0	24.3	500
10624	51.1	54.4	52.0	47.7	57.0	25.0	500
10935	51.5	54.1	52.0	49.6	58.3	18.5	500
11047	53.5	57.0	55.3	51.2	62.4	25.1	400
12431	54.0	58.4	55.0	50.8	62.4	24.5	400
10616	55.0	61.0	59.0	52.2	65.0	25.0	400
11168	55.4	58.8	57.2	53.7	65.0	25.1	400
11169	57.5	57.6	56.1	55.2	63.6	12.8	700
11100	59.3	67.3	64.1	56.7	70.3	31.7	300
10249	59.6	62.6	61.0	57.0	66.7	24.6	300
11075	62.0	66.4	64.3	59.0	71.0	28.0	300
10292	63.3	69.8	67.8	61.5	73.0	25.4	400
10399	64.5	67.3	65.6	62.1	70.6	15.8	400
11064	68.1	70.9	69.3	66.3	74.6	19.0	400
10302	70.0	75.8	74.0	68.1	79.4	25.4	300
10617	74.0	77.0	73.9	71.5	82.5	18.7	300
10550	74.0	76.8	73.4	70.0	80.0	24.4	600
11023	76.8	82.2	80.8	74.8	85.7	25.4	500
11170	77.1	80.7	78.2	74.8	85.7	19.0	300
11037	80.0	86.1	82.0	77.5	89.8	25.1	500
10353	84.2	90.8	88.3	82.7	94.5	28.0	500
12572	87.5	93.6	90.5	84.3	96.7	34.3	250
10304	88.1	93.3	89.9	85.1	96.5	28.6	300
10253	92.1	97.0	94.0	88.3	100.0	32.0	300
12573	94.5	100.6	97.0	91.0	103.6	34.5	100
12199	98.0	102.0	98.5	94.8	107.2	24.7	400
10551	98.2	103.3	99.0	95.0	106.0	28.8	300
10688	101.9	107.5	103.0	98.0	109.0	28.6	300
10771	106.7	111.7	107.4	106.3	113.3	28.6	250
10455	108.0	114.1	111.6	106.4	118.5	35.2	250
12574	111.5	117.6	115.0	107.5	122.0	35.0	250
10355	124.0	128.0	125.0	121.0	134.0	23.0	150
12575	129.0	135.1	132.0	124.0	139.5	36.5	150
12576	139.5	145.6	140.0	135.0	150.0	36.5	150
10356	146.8	151.0	148.6	142.8	159.5	33.0	100
12577	156.0	162.3	158.8	151.8	167.3	36.7	100


TO FIT THREAD SIZE	
AS CAP	AS PLUG
1 5/16" BSP	1 5/16" BSP
1" BSP	M38, 1 1/8" BSP
1 3/8" UNF	1 1/8" BSP
M38	1 1/4" BSP
1 1/2" UNF	
M39, M40	M42
1 1/4" BSP	M45 x 2
M45 x 1.5/2/3	M48 x 2, 1 7/8" JIC/UNF, 1 1/2" BSP
1 3/8" BSP	M48, 1 1/2" BSP
	M48
M48, 1 1/2" BSP	M52
1 3/4" BSP	M56, M55
M58	2" BSP
2" BSP	
	M76, M75, 2 1/2" BSP
2 1/2" BSP	
3" BSP	

HYDRAULIC HOSE PROTECTOR

TAPERED CAPS OR PLUGS

SR 1111
Blue LDPE

- ✓ The tapered design allows the part to plug multiple inner diameters or cap multiple outside diameters
- ✓ Protects against damage, dirt, moisture and corrosion during storage and shipping



TO ASSURE PROPER FIT:

PLUGS

CAPS

Plug dimension "A" should be approx. 1% larger than the inner diameter of the part.
Minimum of .020"


Cap dimension "E" should be approx. 1% smaller than the outside diameter of the part.
Minimum of .020"

PART NUMBER	USE AS A PLUG						USE AS A CAP						PACK QTY.	BULK PACK QTY
	A		B		C		D		E		F			
Blue	In	mm	In	mm	In	mm	In	mm	In	mm	In	mm		
1	0.180	4.57	0.115	2.92	0.313	7.94	0.406	10.32	0.051	1.30	0.118	3.00	1	5000
1S	0.180	4.57	0.138	3.51	0.310	7.87	0.250	6.35	0.051	1.30	0.118	3.00	1	5000
1000A	0.205	5.21	0.145	3.68	0.410	10.41	0.410	10.41	0.079	2.01	0.150	3.81	1	5000
2	0.240	6.10	0.175	4.45	0.375	9.53	0.375	9.53	0.109	2.77	0.175	4.45	1	5000
3	0.268	6.81	0.209	5.31	0.375	9.53	0.375	9.53	0.127	3.23	0.193	4.90	1	5000
3-W	0.274	6.95	0.200	5.08	0.594	15.08	0.375	9.53	0.150	3.81	0.220	5.58	1	5000
4	0.275	6.99	0.209	5.31	0.438	11.11	0.375	9.53	0.150	3.81	0.209	5.31	1	5000
5	0.302	7.67	0.240	6.10	0.469	11.91	0.375	9.53	0.175	4.45	0.240	6.10	1	5000
6	0.335	8.51	0.265	6.73	0.469	11.91	0.375	9.53	0.204	5.18	0.275	6.99	1	5000
7	0.365	9.27	0.300	7.62	0.531	13.49	0.375	9.53	0.234	5.94	0.301	7.65	1	5000
7-W	0.365	9.27	0.300	7.62	0.680	17.27	0.375	9.53	0.234	5.94	0.301	7.65	1	5000
7-S	0.365	9.27	0.330	8.38	0.500	12.70	0.219	5.56	0.266	6.76	0.301	7.65	1	5000
8	0.398	10.11	0.330	8.38	0.563	14.29	0.375	9.53	0.275	6.99	0.330	8.38	1	5000
9	0.428	10.87	0.360	9.14	0.594	15.08	0.375	9.53	0.299	7.59	0.365	9.27	1	5000
10	0.460	11.68	0.390	9.91	0.625	15.88	0.375	9.53	0.325	8.26	0.396	10.06	1	5000
11	0.485	12.32	0.420	10.67	0.594	15.08	0.375	9.53	0.356	9.04	0.421	10.69	1	5000
12	0.512	13.00	0.447	11.35	0.625	15.88	0.406	10.32	0.385	9.78	0.448	11.38	1	5000
13	0.547	13.89	0.490	12.45	0.719	18.26	0.500	12.70	0.409	10.39	0.485	12.32	1	5000
13-SP	0.545	13.84	0.478	12.14	0.719	18.26	0.313	7.94	0.410	10.41	0.480	12.19	1	5000
13-W	0.547	13.89	0.478	12.14	0.875	22.23	0.500	12.70	0.409	10.39	0.485	12.32	1	7000
14	0.568	14.43	0.500	12.70	0.750	19.05	0.438	11.11	0.435	11.05	0.503	12.78	1	5000
1015A	0.576	14.63	0.500	12.70	0.720	18.29	0.470	11.94	0.440	11.18	0.516	13.11	1	5000
16	0.620	15.75	0.531	13.49	0.750	19.05	0.500	12.70	0.468	11.89	0.555	14.10	1	7500
1020A	0.612	15.54	0.554	14.07	0.750	19.05	0.340	8.64	0.490	12.45	0.551	14.00	1	5000
17	0.634	16.10	0.550	13.97	0.781	19.84	0.500	12.70	0.485	12.32	0.568	14.43	1	7500
18	0.675	17.15	0.580	14.99	0.875	22.23	0.531	13.49	0.520	13.21	0.605	15.37	1	5000
20	0.695	17.65	0.610	15.49	0.844	21.43	0.500	12.70	0.549	13.94	0.634	16.10	1	6000
21	0.728	18.49	0.641	16.28	0.875	22.23	0.500	12.70	0.575	14.61	0.665	16.89	1	5000
1025A	0.694	17.63	0.669	16.99	0.750	19.05	0.220	5.59	0.613	15.57	0.638	16.21	1	5000
22	0.754	19.15	0.675	17.15	0.875	22.23	0.625	15.88	0.615	15.62	0.690	17.53	1	4000
23	0.785	19.94	0.690	17.53	0.938	23.81	0.625	15.88	0.625	15.88	0.724	18.39	1	4000
024A	0.805	20.45	0.750	19.05	0.860	21.84	0.190	4.83	0.688	17.48	0.743	18.87	1	7500
26	0.825	20.96	0.725	18.42	1.000	25.40	0.500	12.70	0.662	16.81	0.760	19.30	1	4000
26-L	0.825	20.96	0.725	18.42	0.970	24.64	0.590	14.99	0.662	16.81	0.760	19.30	1	8000
27	0.848	21.54	0.750	19.05	1.031	26.19	0.625	15.88	0.686	17.42	0.777	19.74	1	7000
28	0.910	23.11	0.802	20.37	1.094	27.78	0.750	19.05	0.725	18.42	0.846	21.49	1	5000
29	0.931	23.65	0.820	20.83	1.125	28.58	0.625	15.88	0.754	19.15	0.868	22.05	1	5500
30	0.973	24.71	0.856	21.74	1.125	28.58	0.750	19.05	0.768	19.51	0.906	23.01	1	4500
31	0.975	24.77	0.870	22.10	1.125	28.58	0.625	15.88	0.804	20.42	0.920	23.37	1	5000
35	1.040	26.42	0.895	22.73	1.140	29.37	0.750	19.05	0.832	21.13	0.975	24.77	1	4500
38	1.045	26.54	0.980	24.89	1.250	31.75	0.500	12.70	0.916	23.27	0.984	24.99	1	2500
40	1.096	27.83	0.966	24.54	1.250	31.75	0.750	19.05	0.902	22.91	1.038	23.36	1	3500
41	1.145	29.08	1.002	25.45	1.313	33.34	0.750	19.05	0.938	23.83	1.079	27.41	1	3500
42	1.225	31.12	1.110	28.19	1.516	38.50	0.750	19.05	1.038	26.37	1.180	29.97	1	2500
44	1.292	32.81	1.165	29.59	1.420	36.10	0.750	19.05	1.090	27.69	1.205	30.61	1	2500
1035A	1.310	33.27	0.840	21.34	1.430	36.32	1.090	27.69	0.777	19.74	1.247	31.67	1	2500
1040A	1.284	32.61	1.175	29.85	1.670	42.42	0.750	19.10	1.113	28.27	1.222	31.04	1	2000
1050A	1.312	33.32	1.276	32.41	1.380	35.05	0.560	14.22	1.155	29.34	1.190	30.23	1	2000
45	1.355	34.42	1.225	31.12	1.500	38.10	0.750	19.05	1.160	29.46	1.295	32.89	1	2500
46	1.350	34.29	1.235	31.37	1.500	38.10	0.750	19.05	1.140	28.96	1.295	32.89	1	2500
47	1.362	34.59	1.291	32.79	1.500	38.10	0.750	19.05	1.227	31.17	1.300	33.02	1	2000
1055A	1.420	36.07	1.140	28.96	1.560	39.62	0.840	21.34	1.085	27.56	1.358	34.49	1	2500
48	1.455	36.96	1.291	32.79	1.625	41.28	1.000	25.40	1.227	31.17	1.391	35.33	1	1500
49	1.470	37.34	1.311	33.30	1.625	41.28	0.750	19.05	1.249	31.72	1.400	35.56	1	2000
51	1.517	38.53	1.344	34.14	1.750	44.45	0.938	23.81	1.282	32.56	1.460	36.83	1	1500
53	1.600	40.64	1.450	36.83	1.750	44.45	0.750	19.05	1.385	35.18	1.535	38.99	1	2000
54	1.602	40.69	1.520	38.61	1.780	45.21	0.750	19.05	1.456	36.98	1.537	39.04	1	1700
55	1.673	42.49	1.560	39.62	1.875	47.63	0.750	19.05	1.497	38.02	1.620	41.15	1	1500
56	1.750	44.45	1.606	40.79	1.938	49.21	0.750	19.05	1.568	39.83	1.685	42.80	1	1500
1065A	1.850	46.99	1.720	43.69	2.030	51.56	0.750	19.05	1.664	42.27	1.794	45.57	1	3500
57	1.870	47.50	1.735	44.07	2.031	51.60	0.750	19.05	1.675	42.55	1.820	46.23	1	1200

TAPERED CAPS OR PLUGS

TO ASSURE PROPER FIT:

PLUGS	CAPS
Plug dimension "A" should be approx. 1% larger than the inner diameter of the part. Minimum of .020"	Cap dimension "E" should be approx. 1% smaller than the outside diameter of the part. Minimum of .020"

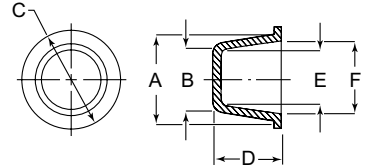

CONTINUE FROM PREVIOUS PAGE



PART NUMBER	USE AS A PLUG						USE AS A CAP						PACK Qty.	BULK PACK Qty
	A		B		C		D		E		F			
BLUE	In	mm	In	mm	In	mm	In	mm	In	mm	In	mm		
1070A	1.900	48.26	1.440	36.58	2.060	52.32	1.310	33.27	1.378	35.00	1.833	46.56	1	1000
58	1.958	49.73	1.806	45.87	2.125	53.98	1.000	25.40	1.745	44.32	1.893	48.08	1	900
59	1.825	46.36	1.800	45.72	2.031	51.59	0.500	12.70	1.736	44.09	1.760	44.70	1	2000
1075A	1.975	50.17	1.865	47.37	2.380	60.45	0.670	17.02	1.785	45.34	1.895	48.13	1	2500
60	2.020	51.31	1.846	46.89	2.125	53.98	1.000	25.40	1.785	45.34	1.938	49.23	1	1000
061A	2.160	54.86	1.740	44.20	2.310	58.67	1.210	30.73	1.668	42.37	2.093	53.16	1	1000
1080A	2.065	52.45	1.950	49.53	2.200	55.88	0.750	19.05	1.885	47.88	2.000	50.80	1	2500
62	2.085	52.96	1.902	48.31	2.250	57.15	1.000	25.40	1.839	46.71	2.015	51.18	1	850
63	2.168	55.07	1.980	50.29	2.250	57.15	1.000	25.40	1.915	48.64	2.110	53.59	1	800
064A	2.310	58.67	1.940	49.28	2.470	62.74	0.880	22.35	1.875	47.63	2.255	57.28	1	1000
1085A	2.100	53.34	2.020	51.31	2.590	65.79	0.380	9.65	2.060	52.32	2.140	54.36	1	1000
65	2.146	54.51	2.016	51.21	2.313	58.74	0.750	19.05	1.955	49.66	2.083	52.91	1	1000
66	2.253	57.23	2.062	52.37	2.438	61.91	1.031	26.20	2.000	50.80	2.175	55.25	1	700
67	2.355	59.82	2.156	54.76	2.625	66.68	1.000	25.40	2.084	52.93	2.288	58.12	1	600
68	2.279	57.90	2.224	56.50	2.500	63.50	0.500	12.70	2.150	54.60	2.221	56.41	1	1200
069A	2.400	60.96	2.280	57.91	2.800	71.12	0.750	19.05	2.216	56.29	2.336	59.33	1	1500
70	2.425	61.60	2.128	54.05	2.500	63.50	1.000	25.40	2.045	51.94	2.370	60.20	1	700
71	2.485	63.12	2.300	58.42	2.625	66.68	1.000	25.40	2.235	56.77	2.400	60.96	1	600
072A	2.464	62.59	2.300	58.42	2.660	67.56	0.750	19.05	2.220	56.39	2.383	60.53	1	2000
73	2.605	66.17	2.395	60.83	2.625	66.68	1.000	25.40	2.331	59.21	2.541	64.54	1	600
74	2.645	67.18	2.428	61.67	2.750	69.85	0.750	19.05	2.420	61.47	2.580	65.53	1	700
75	2.650	67.31	2.311	58.70	2.750	69.85	1.000	25.40	2.245	57.02	2.585	65.66	1	750
76	2.750	69.85	2.457	62.41	2.875	73.03	1.000	25.40	2.392	60.76	2.685	68.20	1	600
77	2.690	68.33	2.560	65.02	2.875	73.03	0.750	19.05	2.500	63.50	2.625	66.68	1	700
78	2.805	71.25	2.645	67.18	3.000	76.20	0.500	12.70	2.580	65.53	2.725	69.22	1	1000
080A	2.870	72.90	2.706	68.73	3.060	77.72	0.720	18.29	2.625	66.68	2.789	70.84	1	500
81	3.000	76.20	2.720	69.09	3.125	79.38	1.000	25.40	2.626	66.70	2.950	74.93	1	500
82	2.980	75.69	2.850	72.39	3.250	82.55	0.750	19.05	2.785	70.74	2.920	74.17	1	500
83	3.158	80.21	2.995	76.07	3.375	85.73	0.500	12.70	2.915	74.04	3.098	78.69	1	750
85	3.245	82.42	2.980	75.69	3.375	85.73	1.000	25.40	2.900	73.66	3.165	80.39	1	400
86	3.365	85.47	3.090	78.49	3.500	88.90	1.000	25.40	3.005	76.33	3.285	83.44	1	400
87	3.450	87.63	3.319	84.30	3.625	92.08	0.500	12.70	3.239	82.27	3.371	85.62	1	500
88	3.575	90.81	3.236	82.19	3.938	100.01	1.000	25.40	3.156	80.16	3.494	88.75	1	300
89	3.600	91.44	3.465	88.01	3.875	98.43	0.880	22.35	3.405	86.49	3.540	89.22	1	350
90	3.800	96.52	3.675	93.35	4.000	101.60	0.750	19.05	3.605	91.57	3.730	94.74	1	300
91	3.925	99.70	3.800	96.52	4.125	104.78	0.688	17.46	3.715	94.36	3.845	97.66	1	300
92	4.070	103.38	3.915	99.45	4.375	111.13	0.781	19.84	3.810	96.77	3.980	101.09	1	250
93	4.190	106.43	4.030	102.36	4.500	114.30	0.750	19.05	3.950	100.33	4.110	104.39	1	250
94	4.445	112.90	4.215	107.06	4.875	123.83	1.000	25.40	4.135	105.03	4.380	111.25	1	200
95	4.605	116.97	4.365	110.87	5.000	127.00	1.000	25.40	4.289	108.95	4.500	114.30	1	200
096A	4.850	123.19	4.640	117.86	5.250	133.35	0.910	23.11	4.570	116.08	4.780	121.41	1	250
1090A	4.970	126.24	4.790	121.67	5.380	136.65	1.030	26.16	4.710	119.63	4.890	124.21	1	250
1100A	5.090	129.29	4.910	124.71	5.500	139.70	1.030	26.16	4.830	122.68	5.010	127.25	1	250
1110A	5.200	132.08	4.990	126.75	5.630	143.00	1.030	26.16	4.920	124.97	5.100	129.54	1	250
099A	5.360	136.14	5.180	131.57	5.880	149.35	1.030	26.16	5.110	129.79	5.290	134.37	1	250
100A	5.490	139.45	5.330	135.38	5.880	149.35	0.910	23.11	5.210	132.33	5.370	136.40	1	250
101	5.620	142.75	5.470	138.94	6.130	155.70	1.000	25.40	5.390	136.91	5.540	140.72	1	100
102A	5.750	146.05	5.570	141.48	6.190	157.23	1.030	26.16	5.490	139.45	5.670	144.02	1	250
103	5.874	149.20	5.640	143.26	6.250	158.80	1.000	25.40	5.540	140.72	5.794	147.17	1	100
104	6.180	156.97	6.010	152.65	6.620	168.15	1.000	25.40	5.920	150.37	6.100	154.94	1	90
106	6.560	166.62	6.400	162.56	6.940	176.28	0.900	22.86	6.330	160.78	6.480	164.59	1	100
108	6.710	170.43	6.610	167.89	7.190	182.63	1.530	38.86	6.530	165.86	6.630	168.40	1	100
110	7.120	180.85	7.050	179.07	7.630	193.80	1.030	26.16	6.970	177.04	7.040	178.82	1	100

WIDE FLANGE CAPS/PLUGS

SR 1115

Low-Density Polyethylene

- ✓ Wider flange assures added protection on bearing surfaces
- ✓ Wider flange keeps plug from being accidentally pushed down thru the mating part
- ✓ The tapered design allows the part to plug multiple inner diameters or cap multiple outside diameters



TO ASSURE PROPER FIT:

PLUGS	CAPS
Plug dimension "A" should be approx. 1% larger than the inner diameter of the part. Minimum of .020"	Cap dimension "E" should be approx. 1% smaller than the outside diameter of the part. Minimum of .020"



PART NUMBER	USE AS A PLUG						USE AS A CAP										COLOR	PACK Qty.	BULK PACK Qty
	A		B		C		D		E		F		G						
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm					
LF2A	0.240	6.10	0.173	4.39	0.562	14.27	0.465	11.81	0.111	2.82	0.177	4.50	0.090	2.29	Blue	1	5500		
LF-3	0.290	7.37	0.236	5.99	0.485	12.32	0.402	10.21	0.146	3.71	0.245	6.22	0.090	2.29	Blue	1	5000		
LF-6	0.418	10.62	0.367	9.32	0.740	18.80	0.402	10.21	0.298	7.57	0.354	8.99	0.090	2.29	Blue	1	5000		
LF-10	0.547	13.89	0.481	12.22	0.870	22.10	0.460	11.68	0.409	10.39	0.493	12.52	0.090	2.29	Blue	1	7000		
LF-11X	0.631	16.03	0.565	14.35	0.950	24.13	0.491	12.47	0.500	12.70	0.580	14.73	0.090	2.29	Blue	1	5000		
LF-12X	0.687	17.45	0.610	15.49	1.031	26.19	0.527	13.39	0.548	13.92	0.635	16.13	0.090	2.29	Blue	1	4500		
LF-13	0.725	18.42	0.628	15.95	1.062	26.97	0.528	13.41	0.558	14.17	0.667	16.94	0.090	2.29	Yellow	1	5000		
LF-15X	0.812	20.62	0.725	18.42	1.140	28.96	0.580	14.99	0.662	16.81	0.765	19.43	0.090	2.29	Blue	1	3000		
LF-17	0.920	23.37	0.820	20.83	1.250	31.75	0.621	15.77	0.741	18.82	0.865	21.97	0.090	2.29	Blue	1	2300		
LF18A	0.975	24.77	0.867	22.02	1.281	32.54	0.650	16.51	0.805	20.45	0.913	23.19	0.090	2.29	Blue	1	4000		
LF-19	1.020	25.90	0.950	24.13	1.344	34.13	0.715	18.16	0.875	22.22	0.957	24.30	0.090	2.29	Blue	1	1500		
LF-28	1.890	48.01	1.730	43.94	2.312	58.72	0.745	18.92	1.650	41.91	1.825	46.36	0.120	3.05	Blue	1	1100		

CENTRE PULL TAB PLUGS

SR 1110

Orange LDPE



- ✓ The integral center pull tab feature is designed for quick and easy removal
- ✓ The tapered design allows the part to plug multiple inner diameters

TO ASSURE PROPER FIT:

PLUGS

Plug dimension "A" should be approx. 1% larger than the inner diameter of the part.
Minimum of .020"

1/32 (79.0)
+1° taper
per side

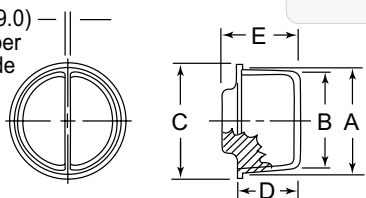

Part Number	Use as a Plug										Bulk Pack
	A		B		C		D		E		
	In	mm	In	mm	In	mm	In	mm	In	mm	Qty
CP6A	0.335	8.51	0.267	6.78	0.469	11.91	0.406	10.32	0.625	15.88	5000
CP9A	0.428	10.87	0.362	9.19	0.594	15.08	0.375	9.53	0.750	19.05	7000
CP10A	0.463	11.76	0.402	10.21	0.625	15.88	0.375	9.53	0.750	19.05	6000
CP14A	0.500	12.70	0.567	14.40	0.720	18.30	0.469	11.90	0.811	20.60	7500
CP12A	0.512	13.00	0.448	11.38	0.656	16.67	0.406	10.32	0.563	14.29	5000
CP18A	0.579	14.70	0.669	17.00	0.811	20.60	0.531	13.50	0.752	19.10	5500
CP19A	0.610	15.50	0.697	17.70	0.839	21.30	0.531	13.50	0.780	19.80	5000
CP24A	0.610	15.50	0.827	21.00	1.000	25.40	0.591	15.00	0.839	21.30	5000
CP31A	0.973	24.71	0.869	22.07	1.120	28.45	0.750	19.05	1.000	25.40	4000
CP40A	1.028	26.10	1.146	29.10	1.339	34.00	0.752	19.10	1.000	25.40	2500
CP37A	1.092	27.74	0.967	24.56	1.250	31.75	0.780	19.81	1.030	26.16	2500
CP42A	1.094	27.80	1.220	31.00	1.409	35.80	0.780	19.80	1.000	25.40	2500
CP44A	1.150	29.20	1.287	32.70	1.551	39.40	0.752	19.10	1.000	25.40	2000
CP47A	1.356	33.22	1.292	32.82	1.500	38.10	0.781	19.84	1.000	25.40	1800
CP49A	1.311	33.30	1.465	32.70	1.622	41.20	0.752	19.10	1.000	25.40	1800
CP51A	1.527	38.79	1.344	34.14	1.750	44.45	0.880	22.35	1.000	25.40	1500
CP55A	1.601	40.67	1.451	36.86	1.750	44.45	0.750	19.05	1.000	25.40	1500
CP56A	1.735	44.07	1.615	41.02	1.906	48.42	0.719	18.26	1.125	28.58	1000
CP57A	1.938	49.23	1.807	45.90	2.160	54.86	1.000	25.40	1.250	31.75	1000



TAPERED PLUG WITH RING TAB

SR 1174

Yellow LDPE

- ☒ Can be used either as a plug or a cap
- ☒ Tapered profile for extended dimensions
- ☒ Easy removal of the part with strong ring tab

Part Number	Dimensions (mm)					Std Pack Qty
	d1	d2	H	D	L	
498716	5.0	7.0	9.5	17.3	20.3	1000
498717	6.0	8.0	9.5	18.2	21.1	1000
498718	7.0	9.5	9.5	20.3	23.3	1000
498719	8.0	10.0	9.5	20.3	23.2	1000
498720	9.5	11.5	9.5	21.9	24.8	1000
498721	10.5	12.5	9.5	22.6	26.5	1000
498722	11.5	13.5	9.5	23.7	27.5	1000
498723	12.5	14.5	10.0	24.5	28.4	1000
498724	13.5	15.5	10.0	25.5	29.5	1000
498725	14.2	16.2	10.0	26.3	30.3	1000
498726	14.5	17.0	10.0	27.0	31.0	500
498727	15.5	18.0	10.0	28.3	32.0	500
498728	17.5	19.5	10.0	30.0	34.0	500
498729	18.0	20.0	10.0	30.0	34.0	500
498730	19.0	21.5	11.0	32.0	35.7	500
498731	21.0	24.2	11.0	34.7	38.7	500
498732	22.5	25.5	12.0	36.0	40.0	500
498733	25.0	28.0	12.0	38.5	42.2	500
498734	29.0	31.5	12.0	41.8	47.0	500
498735	29.5	32.0	12.0	42.5	47.6	500

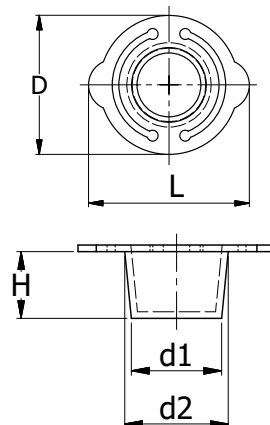

PUSH-IN PLUGS

SR 1010


LDPE

BLUE UNF/JIC

- ☒ Quick fitting
- ☒ Suitable for most applications



PART NUMBER	THREAD SIZE	DIMENSIONS (mm)			STD PACK QTY
		D	h	d	
12512	$\frac{1}{16}$ " x20	15.5	7.0	9.5	10000
12513	$\frac{1}{2}$ " x20	17.0	7.0	11.0	10000
12514	$\frac{9}{16}$ " x18	20.5	7.0	12.5	10000
12515	$\frac{5}{8}$ " x18	23.7	6.5	14.3	10000
12516	$\frac{3}{4}$ " x16	24.9	8.6	17.4	10000
12517	$\frac{7}{8}$ " x14	26.6	10.4	20.3	5000
12518	1" x14	31.0	10.0	23.5	4000
12519	$1\frac{1}{16}$ " x12	35.5	10.0	24.8	4000

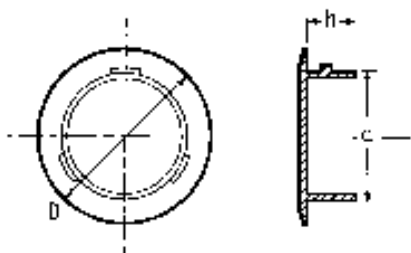


RED WITHOUT LUGS

PART NUMBER	DIMENSIONS (mm)			STD PACK QTY
	D	h	d	
12520	16.4	6.3	11.9	5000
12522	23.8	7.0	19.2	5000
12523	30.0	6.1	25.5	2500
12524	35.0	8.0	30.9	2000

SNAP-FIT PLUGS

SR 1008
Red LDPE

✓ Single turn gives tight fit once pushed into position




PART NUMBER	TO FIT THREAD SIZE			DIMENSIONS (mm)			STD PACK QTY
	METRIC	BSP/GAS	UNF/JIC	h1	D	h2	
10530	M10	$\frac{1}{8}$ "	$\frac{7}{16}$ "	6.0	9.8	4.0	12000
12363	M12,M13,M14	$\frac{1}{4}$ "	$\frac{1}{2}$ "	7.0	13.1	5.0	10000
12364	M16	$\frac{3}{8}$ "	$\frac{5}{8}$ "	7.0	16.5	5.0	10000
10314	M18	-	$\frac{3}{4}$ "	9.0	18.3	7.0	7000
12365	M20	$\frac{1}{2}$ "	-	9.0	21.3	7.0	5000
12366	M22	$\frac{5}{8}$ "	$\frac{7}{8}$ "	9.0	22.4	7.0	5000
12621	M24	-	-	9.0	23.5	7.0	3000
12367	M25,M26	$\frac{3}{4}$ "	$1 \frac{1}{16}$ "	9.0	25.5	7.0	2000
12368	M28	$\frac{7}{8}$ "	$1 \frac{1}{8}$ "	9.0	27.9	7.0	3000
12369	M32	1"	$1 \frac{5}{16}$ "	9.0	32.0	7.0	2500
12622	M36	$1 \frac{1}{8}$ "	$1 \frac{1}{2}$ ", $1 \frac{3}{8}$ "	9.0	35.7	7.0	2000
12598*	M40,M42	$1 \frac{1}{4}$ "	$1 \frac{5}{8}$ "	9.0	41.5	7.0	2000

* Pull-tab not as illustrated.

STRAIGHT PULL PLUGS

SR 1119
Yellow LDPE

✓ Provides all the advantages of a threaded plug with the ease of a push-in style

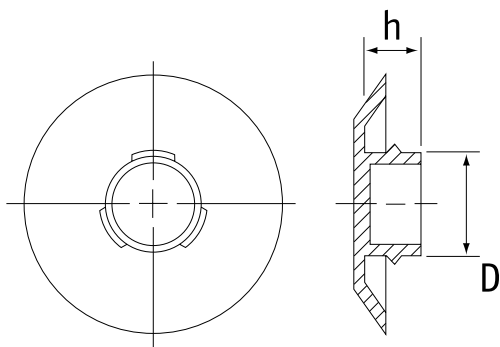


PART NUMBER	TO FIT UNF THREAD SIZE	DIMENSIONS (mm)		STD PACK QTY
		D	h	
I-1/4	$\frac{1}{4}$ "	5.2	5.6	50000
I-5/16	$\frac{5}{16}$ "	6.7	6.0	35000
I-3/8	$\frac{3}{8}$ "	8.2	6.0	27000
I-7/16	$\frac{7}{16}$ "	9.7	6.9	18000
I-1/2	$\frac{1}{2}$ "	11.1	6.9	50000
I-9/16	$\frac{9}{16}$ "	12.6	7.4	10000
I-5/8	$\frac{5}{8}$ "	14.2	7.4	7500
I-11/16	$\frac{11}{16}$ "	15.5	7.4	7000
I-3/4	$\frac{3}{4}$ "	17.2	7.4	6000
I-13/16	$\frac{13}{16}$ "	18.6	7.4	5000
I-7/8	$\frac{7}{8}$ "	20.3	7.4	4500
I-1	1"	23.4	7.4	3500
I-1-1/16	$1 \frac{1}{16}$ "	24.7	7.4	3000
I-1-3/16	$1 \frac{3}{16}$ "	27.7	8.6	2000
I-1-1/4	$1 \frac{1}{4}$ "	29.5	8.6	2000
I-1-5/16	$1 \frac{5}{16}$ "	30.9	8.6	2000
I-1-5/8	$1 \frac{5}{8}$ "	38.7	11.7	1000
I-1-7/8	$1 \frac{7}{8}$ "	45.1	11.7	800

BARREL PLUGS

SR 1011 Natural LDPE

- ☒ General-purpose plug for a wide range of applications
- ☒ Quick to fit and remove
- ☒ Convexed sides to ensure secure fit




PART NUMBER	TO FIT UNF THREAD SIZE	DIMENSIONS (mm)				STD PACK QTY
		d	D	h	H	
055002200003	-	2.1	3.5	7.0	-	1000
055003200003	-	3.3	12.0	6.0	7.7	1000
055004400003	-	4.4	9.0	5.2	6.5	1000
055004700003	-	4.6	7.0	5.0	6.2	1000
055005200003	-	5.1	11.0	6.0	8.0	1000
10876*	-	5.4	12.0	7.5	9.5	10000
1287228	-	6.3	9.6	4.0	5.1	1000
055006600003	-	6.6	7.5	5.0	-	1000
12135	M8 x1	7.3	14.0	6.0	8.0	10000
12136	-	8.4	14.0	6.0	8.0	10000
055008800003	-	8.8	11.5	8.0	9.5	500
055009300003	-	9.3	12.0	9.0	11.5	500
10905	M10	9.3	14.0	4.5	6.5	6000
12978	1/8" BSP	9.3	16.0	6.8	8.3	6000
055010100003	-	10.0	12.0	4.0	5.7	500
055010000003	-	10.0	15.0	9.0	11.2	500
12977	M12 x1.5	10.7	14.0	6.0	8.2	6000
055010700003	-	10.7	14.8	9.0	11	500
1255331	M12 x1.25, M12 x1	11.3	14.4	5.5	9.5	1000
110478	M14	11.9	16.0	7.0	9.0	5000
10906	-	12.3	16.0	7.0	9.0	5000
12979	M14 x1.5	12.8	20.0	7.8	10.3	5000
1287226	M14 x1.5, M14 x1.25	13.7	18.7	7.0	9.0	1000
12787	-	13.7	20.0	8.0	10.0	5000
1255332	M16 x1.5	14.0	18.7	7.0	9.0	1000
12089	-	14.5	20.0	5.5	7.5	5000
055014300003	-	14.9	18.5	9.5	11.7	500
1287225	M16 x1.5	15.0	18.7	7.0	9.0	1000
12789	-	15.6	20.0	8.0	10.0	5000
1287229	M18 x2, M18 x1.5, M18 x1	16.5	18.7	7.0	9.0	1000
12790	-	17.0	22.0	8.2	10.8	5000
465687	M20 x2	17.8	24.6	9.0	11.3	1000
12791	-	18.4	25.0	8.0	10.5	5000
055018300003	-	18.8	21.5	9.0	12.0	500
12792	1/2" BSP	19.3	25.0	8.0	11.0	5000
465688	M22 x2	19.5	24.6	9.0	11.1	1000
1255333	M22 x1.5	20.1	24.6	9.0	11.1	500
055020000003	-	20.5	25.5	9.0	12.0	250
12980	M22 x1.5	20.5	30.0	10.7	13.2	3000
055021000003	-	21.0	26.0	12.6	15.6	250
12793	5/8" BSP	21.2	25.0	7.5	9.5	5000
12794	-	21.7	25.0	8.0	10.5	4000
12796	M24 x2	22.4	28.0	9.0	12.0	4000
055023000003	-	23.0	27.4	19.3	20.8	100
12797	-	23.4	28.0	9.0	12.0	4000
055024000003	-	24.0	27.0	12.8	14.4	100
12799	3/4" BSP	24.6	28.0	9.0	12.0	3000
055025500003	-	24.8	31.5	6.0	8.2	100
055024500003	-	25.0	32.0	13.0	16.2	100
12800	M27 x1.5	25.5	28.0	7.5	9.5	3000
12801	M28 x1.5	26.5	28.0	9.0	12.0	4000
055027200003	-	27.0	29.6	15.0	16.4	100
465690	M30 x3	27.5	34.8	12.0	14.5	500

CONTINUED ON NEXT PAGE

BARREL PLUGS

SR 1011
Natural LDPE



CONTINUE FROM PREVIOUS PAGE


PART NUMBER	TO FIT UNF THREAD SIZE	DIMENSIONS (mm)				STD PACK QTY
		d	D	h	H	
055028600003	-	28.6	34.0	15.0	18.8	100
12802	-	29.0	36.0	12.0	15.0	3000
12803	$\frac{7}{8}$ " BSP	30.5	36.0	12.0	15.0	2500
12804	M33x1.5, 1" BSP	31.8	36.0	10.0	12.5	2000
1255334	M33x2, M33x1.5, M36x3	32.6	34.8	12.0	14.5	500
12805	M35x1.5	33.5	36.0	12.0	15.0	2000
055033500003	-	33.5	41.0	12.0	14.8	100
110479	-	34.8	42.0	15.0	18.0	2000
055035600003	-	35.5	46.5	15.0	19.5	100
110480	-	36.5	42.0	15.0	18.0	2000
465692	M39x3	37.6	40.4	12.0	14.5	500
110481	-	38.4	42.0	15.0	18.0	2000
1258454	M39x1.5, M42x3	39.0	49.3	16.0	18.9	500
110482	-	40.6	44.0	15.0	18.0	1500
10122	-	42.3	48.0	15.0	18.0	1000
055043300003	-	43.3	50.5	15.0	18.0	100
110483	-	46.0	55.5	18.0	21.0	1500
055050500003	-	50.5	57.0	14.0	19.4	100
110484	$1 \frac{3}{4}$ " BSP	51.5	55.0	18.0	21.0	1500
055052000003	-	52.5	60.0	14.0	17.5	100
465694	M56x4, M56x3, M56x2	54.1	58.7	18.0	21.0	500
055055300003	-	55.3	59.6	19.5	23.0	100
110485	2" BSP	58.0	64.0	18.0	21.0	750
465695	-	59.6	73.5	18.0	21.0	500
12137	M72x2	70.0	78.0	18.0	21.5	500
465696	M75x1.5	73.7	82.3	17.4	20.4	250
465697	M80x4	80.8	92.5	17.4	20.4	250
055085000003	-	85.0	93.5	18.0	19.7	50
465698	M76x2	86.5	99.3	17.4	20.4	250
465699	M100x2	98.8	112	17.4	20.4	250
55110000003	-	110.5	130	18	21.5	50
465700	M115x4	111.7	123	17.4	20.4	250

MOSS PLUGS

SR 1013

Black PVC or Green Vinyl

- ☒ Highly resistant to shredding
- ☒ Green vinyl can be used with oils and greases





PART NUMBER		DIMENSIONS (mm)				STD PACK QTY
BLACK PVC	GREEN VINYL	D	H	d1	d2	
10874	-	7.0	9.0	1.6	3.2	10000
12665	-	11.0	12.0	3.2	5.0	10000
12666	11806	12.0	12.0	3.1	6.0	5000
12667	11817	13.0	12.0	4.5	7.0	5000
12668	11808	14.0	12.0	4.9	8.0	10000
12669	11829	15.0	12.0	6.1	9.0	5000
12670	11807	16.0	12.0	7.2	10.0	5000
12671	11824	17.0	12.0	8.2	11.0	10000
12672	11809	20.0	12.0	9.2	12.0	8000
12673	11822	21.0	14.0	10.2	13.0	8000
12674	11813	22.0	14.0	11.0	14.0	7000
12675	11830	23.0	14.0	12.2	15.0	6000
12677	11820	24.0	14.0	12.9	16.0	6000
12678	11811	27.0	14.0	14.0	17.0	5000

PART NUMBER		DIMENSIONS (mm)				STD PACK QTY
BLACK PVC	GREEN VINYL	D	H	d1	d2	
12679	11827	28.0	14.0	15.0	18.0	4000
12680	11818	29.0	14.0	16.1	19.0	2000
12681	11812	30.0	14.0	17.2	20.0	2000
12683	11823	31.0	14.0	18.0	21.0	3000
12684	11828	32.0	14.0	19.0	22.0	1500
12685	11814	33.0	14.0	20.1	23.0	1500
12686	11810	34.0	16.0	21.6	24.0	2500
12687	11816	35.0	16.0	22.2	25.0	2000
12688	11819	36.0	16.0	23.5	26.0	2000
12689	11821	37.0	16.0	23.6	27.0	2000
12690	11825	38.0	16.0	25.2	28.0	2000
12692	11826	40.0	16.0	27.9	30.0	1000
12694	12078	50.0	22.0	36.4	40.0	700
12694	-	57.0	22.0	43.2	47.0	500

OPEN SLOTTTEX PLUGS

SR 1117

Blue HDPE



- ☒ Can be applied or removed by spanner, screwdriver or socket; manually or with power tool


PART NUMBER	THREAD SIZE	DIMENSIONS (mm)				STD PACK QTY
		D	h1	h2	S	
B-3	7/16" -20	15.8	7.6	4.6	10.9	11000
B-4	1/2" -20	12.3	9.1	4.6	12.7	7500
B-5	9/16" -18	19.1	9.7	4.6	12.7	6000
B-6	5/8" -18	20.6	8.9	4.6	14.2	5000
B-7	3/4" -16	23.9	11.2	4.8	17.3	3500
B-8	7/8" -14	26.9	12.7	6.1	19.1	2100
B-9	1" -14	30.0	10.9	6.4	19.1	2000
B-10	1 1/16" -14	33.3	16.4	6.4	22.1	1200

SEALING SLOTTED PLUGS

SR 1007

Yellow Nylon 6

- ✓ Double sealing ring on underside of flange provides positive sealing
- ✓ Quick and easy to fit using screwdriver, spanner, socket or allen key
- ✓ Can be tightened manually or with power tool
- ✓ Head designed not to trap liquid

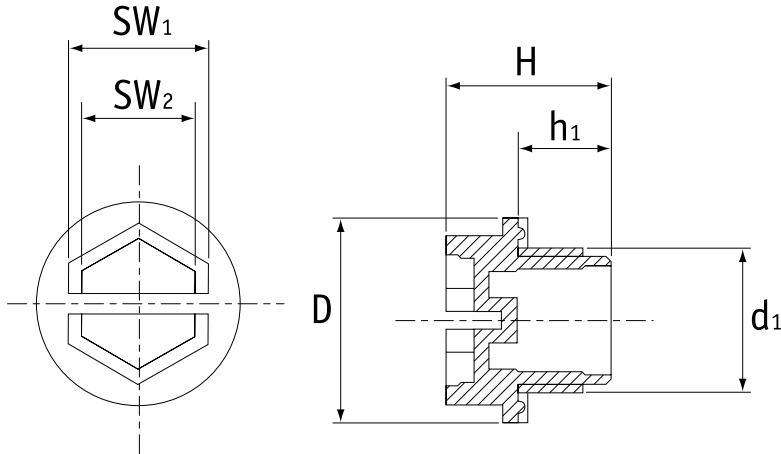

METRIC THREAD

PART NUMBER	THREAD SIZE (d1)	DIMENSIONS (mm)					STD PACK QTY
		D	H	h	SW1	SW2	
462836	M8 x1	12.5	15.5	8.0	7.0	4.0	5000
462837	M10 x1	14.5	16.5	9.0	9.0	6.0	5000
466973	M12 x1	17.0	16.5	9.0	10.0	7.0	500
466974	M10 x1.5	14.5	16.5	9.0	9.0	6.0	500
462838	M12 x1.5	17.0	16.5	9.0	10.0	7.0	5000
462839	M14 x1.5	19.0	17.5	10.0	13.0	10.0	5000
462840	M16 x1.5	22.3	17.5	9.3	15.0	12.0	5000
462841	M18 x1.5	24.0	17.5	10.0	17.0	14.0	3000
462842	M20 x1.5	26.0	17.5	10.0	19.0	16.0	3000
462843	M22 x1.5	28.0	17.5	10.0	21.0	18.0	3000
466975	M24 x1.5	30.0	17.5	10.0	24.0	21.0	500
466976	M26 x1.5	32.0	20.5	12.0	24.0	21.0	500
466977	M27 x1.5	33.0	20.5	12.0	24.0	21.0	500
466978	M28 x1.5	34.0	20.5	12.0	24.0	21.0	500
466979	M30 x1.5	38.0	20.5	12.0	24.0	21.0	500
466980	M32 x1.5	40.0	20.5	12.0	24.0	21.0	500
466981	M36 x1.5	45.0	20.5	12.0	24.0	21.0	500
466982	M38 x1.5	48.0	20.5	12.0	24.0	21.0	250
466983	M45 x1.5	52.0	21.5	12.0	30.0	27.0	250
466984	M52 x1.5	60.0	22.0	12.0	30.0	27.0	250
466985	M27 x2	33.0	22.0	13.5	24.0	21.0	250
466986	M30 x2	38.0	22.0	13.5	24.0	21.0	250
466987	M33 x2	40.0	22.0	13.5	24.0	21.0	250
466988	M36 x2	45.0	22.0	13.5	24.0	21.0	250
466989	M42 x2	50.0	22.0	13.5	30.0	27.0	250
466990	M45 x2	52.0	22.0	13.5	30.0	27.0	125
466991	M48 x2	55.0	23.0	13.5	30.0	27.0	100
466992	M52 x2	60.0	23.0	13.5	30.0	27.0	100

UNF THREAD

PART NUMBER	THREAD SIZE (d1)	DIMENSIONS (mm)					STD PACK QTY
		D	H	h	SW1	SW2	
466948	$\frac{3}{8}$ " x24	16.0	17.5	10.0	9.0	6.0	5000
466949	$\frac{7}{16}$ " x20	17.0	17.5	10.0	10.0	7.0	5000
466950	$\frac{1}{2}$ " x20	19.0	17.5	10.0	13.0	10.0	3000
466951	$\frac{9}{16}$ " x18	20.5	17.5	10.0	13.0	10.0	3000
466952	$\frac{5}{8}$ " x18	22.0	17.5	10.0	15.0	12.0	3000
466953	$\frac{3}{4}$ " x16	26.0	17.5	10.0	19.0	16.0	3000
466954	$\frac{7}{8}$ " x14	28.5	19.5	12.0	21.0	18.0	3000
466955	1" x14	31.5	19.5	12.0	24.0	21.0	1000
466956	1 $\frac{1}{16}$ " x12	33.0	19.5	12.0	24.0	21.0	1000
466957	1 $\frac{3}{16}$ " x12	36.5	22.5	15.0	30.0	27.0	1000
466958	1 $\frac{5}{16}$ " x12	40.0	22.5	15.0	30.0	27.0	1000
466959	1 $\frac{5}{8}$ " x12	47.5	22.5	15.0	36.0	33.0	500
466960	1 $\frac{7}{8}$ " x12	54.0	22.5	15.0	36.0	33.0	500


BSP THREAD

PART NUMBER	THREAD SIZE (d1)	DIMENSIONS (mm)					STD PACK QTY
		D	H	h	SW1	SW2	
462882	$\frac{1}{8}$ " x28	16.0	15.5	8	12	9	5000
462848	$\frac{1}{4}$ " x19	19.0	17.5	10	13	10	5000
462849	$\frac{3}{8}$ " x19	22.0	17.5	10	15	12	5000
462850	$\frac{1}{2}$ " x14	27.0	19.5	12	19	16	3000
466993	$\frac{5}{8}$ " x14	29.5	19.5	12	22	19	500
462851	$\frac{3}{4}$ " x14	32.0	19.5	12	24	21	2000
462852	1" x11	40.0	22.5	15	30	27	1000
462853	1 $\frac{1}{4}$ " x11	50.0	22.5	15	36	33	1000
466995	1 $\frac{1}{2}$ " x11	56.0	24.0	15	41	37	250
466996	1 $\frac{3}{4}$ " x11	62.0	24.0	15	50	46	250
466997	2" x11	68.0	24.0	15	55	51	100

SLOTTEX PLUGS

SR 1005
Yellow HDPE

- Can be applied or removed with screwdriver, spanner or socket; manually or with power tool



METRIC



PART NUMBER	THREAD SIZE (d1)	DIMENSIONS (mm)				STD PACK QTY
		D	H	h	s	
110860	M8 x 1	12.0	14.2	7.0	7.0	5000
110861	M10 x 1	14.0	13.2	6.0	9.0	5000
110862	M12 x 1	16.0	16.2	9.0	10.0	5000
110863	M12 x 1.5	16.0	16.2	9.0	10.0	5000
110864	M14 x1.5	19.0	16.2	9.0	13.0	5000
110865	M16 x1.5	21.0	17.2	10.0	15.0	3000
110866	M18 x1.5	24.0	18.2	10.0	17.0	3000
110867	M20 x1.5	16.0	20.2	12.0	19.0	3000

BSP/GAS

PART NUMBER	THREAD SIZE (d1)	DIMENSIONS (mm)				STD PACK QTY
		D	H	h	s	
110868	1/8" x28	14.0	16.2	9.0	9.0	5000
110869	1/4" x19	19.0	16.2	9.0	13.0	5000
110870	3/8" x19	21.0	17.2	10.0	15.0	5000
110871	1/2" x14	26.0	20.2	12.0	19.0	3000
110872	3/4" x14	32.0	20.2	12.0	24.0	2000
110873	1" x11	40.0	20.2	12.0	30.0	1500
110874	1 1/4" x11	49.0	20.2	12.0	36.0	800

ANTI-VIBRATION PLUG

SR 6112
Transparent LDPE



- Ideal for BSP hydraulic fittings
- Notched thread design prevents part coming loose due to vibration
- Transparent colour allows easy inspection of o-ring
- Plug keeps fitting tight against tube collar




PART NUMBER	TO FIT THREAD	DIMENSIONS (mm)		STD PACK QTY
		H	h	
110826	1/4" x19	11.0	5.0	500
110827	3/8" x19	12.8	6.8	500
110829	1/2" x14	13.3	7.3	500
110828	5/8" x14	16.5	10.5	500
110830	3/4" x14	15.6	9.6	500

UNF STANDARD THREADED PLUGS

SR 5762

Polypropylene - Yellow / Black

- ✓ Can be applied or removed by hand, hex wrench or screwdriver
- ✓ Optional O-ring gives this part a water tight seal for superior leakage protection

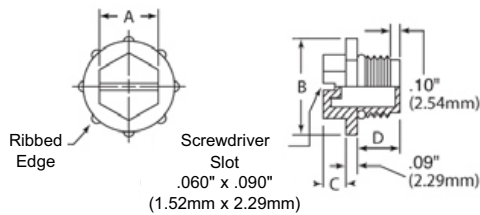


PART NUMBER	PART NUMBER w/o-ring	TO FIT THREAD SIZE	DIMENSIONS (MM)				STD PACK QTY
			A	B	C	D	
BL3A	BL3L	7/16" x 20	10.9	15.8	4.57	9.91	10000
BL4A *	BL4B *	1/2" x 13	12.7	17.5	7.14	10.41	6000
BL5A	BL5K	9/16" x 18	12.7	19.1	4.57	10.67	6000
BL7A	BL7J	3/4" x 16	17.3	23.9	4.83	13.21	3000
BL8A	BL8H	7/8" x 14	19.1	26.9	6.1	14.22	2100
BL10A	BL10I	1 1/16" x 12	22.1	33.3	6.35	16.76	1200
BL11A	BL11D	1 3/16" x 12	25.4	38.1	7.62	17.78	850
BL12A	BL12H	1 5/16" x 12	27.18	40.89	7.37	17.78	700
BL13A	BL13D	1 5/8" x 12	28.58	42.75	7.62	19.56	1000
BL14A	BL14C	1 7/8" x 12	38.1	53.98	7.62	19.05	700

UNF STANDARD THREADED WIDE FLANGE PLUGS

BLWF Series

Plug - Yellow Nylon

Gasket - Black Nitrile

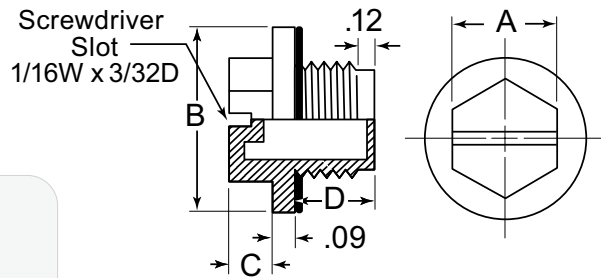

- ✓ The wide flange design keeps any paint flakes away from the hole when removed
- ✓ The nylon material absorbs paint keeping paint flakes to a minimum
- ✓ The nitrile gasket seals the plug to the mating surface for a watertight seal
- ✓ Can be applied or removed by hand, screwdriver or with a torque wrench
- ✓ Nylon is recommended for intermittent temperatures up to 230°F (110°C) to -40°F (-40°C)

PART NUMBER	TO FIT THREAD SIZE	A		B		C		D		PACK QTY.	STD PACK QTY
		IN	MM	IN	MM	IN	MM	IN	MM		
BLWF100A	7/16"-20	0.500	12.70	0.775	19.69	0.180	4.57	0.390	9.91	1	5000
BLWF105A	1/2"-20	0.500	12.70	0.853	21.67	0.180	4.57	0.405	10.29	1	5000
BLWF110A	9/16"-18	0.500	12.70	0.917	23.29	0.180	4.57	0.420	10.67	1	2500
BLWF115A	3/4"-16	0.750	19.05	1.130	28.70	0.190	4.83	0.520	13.21	1	2500
BLWF120A	7/8"-14	0.750	19.05	1.284	32.61	0.240	6.10	0.560	14.22	1	2500
BLWF125A	1-1/16"-12	1.000	25.40	1.577	40.06	0.250	6.35	0.660	16.76	1	1000
BLWF130A	1-3/16"-12	1.000	25.40	1.722	43.74	0.300	7.62	0.700	17.78	1	1000
BLWF135A	1-5/16"-12	1.000	25.40	1.867	47.42	0.290	7.37	0.700	17.78	1	1000
BLWF140A	1-5/8"-12	1.125	28.57	2.217	56.31	0.300	7.62	0.770	19.56	1	500



GET IN TOUCH WITH US:

HEAD OFFICE:

📍 #639, 1st & 2nd floor, Coconut Garden, Near Ravindra Bharathi School,
Arekere Village, B.G. Road, Bangalore – 560 076

☎ +91-080-4814 4500 | +91 88616 70309

✉ rajeshwarienterprises27@gmail.com
sales@rajeshwarienterprises.co.in

www.rajeshwarienterprises.co.in