
SUCKER | WHALE SPECIFICATION

SUCKER | WHALE

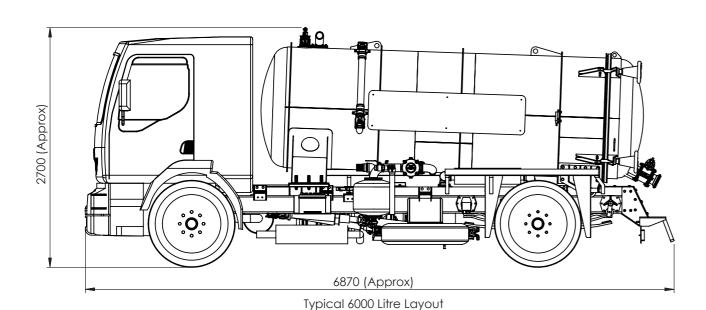

WHALE SUPPORT

One of Whale's primary objectives is to maximise operating performance by keeping downtime to an absolute minimum, leading to significantly reduce whole life costs. This is achieved by ensuring we can provide service support across all Indian states. Whale stock an extensive range of appropriate parts.

WHALE OUALITY

Whale Enterprise cares about quality across all aspects of its business. Indeed it is a word that characterises the company. Whale complies to ISO 9001 and all Whale products fully comply with all relevant legislation and regulations. It also has the benefit from being supported by its UK parent company Whale Tankers the largest manufacturer of vacuum tankers and jetting equipment in Europe.

WHALE TRAINING

Central to Whale's success is not only the training of its staff but also the provision of structured training for its product. This meets the changing needs of today's Indian water and sewage infrastructures. The company is also respected for its onsite commissioning of all new products.

Whale Enterprise manufacture a wide range of products and vehicle types and provide many other services. For a copy of any of the following brochures or for further information, either call on: +91 95009 45511. Email us at: sales@whaleenterprise.in, or visit our website at www.whaleenterprise.in

WHALE LITEJET	COMBI WHALE	SUCKER WHALE	KAISER WHALE
WHALE	SUPER SUCKER	WHALE SERVICE	WHALE PARTS

Reliability, Service, Value ... for Life





Whale Enterprise PVT Ltd.



THE **PERFECT SUCKER**



removers



SUCKER WHALE

Reliability, Service, Value ... for Life

Specially designed Door Clamps

Special design ensures the door can't be opened when tank is under pressure. Also door clamps are ergonomically designed for easy handling.

Tank Rings for Safety

These rings are designed as per ASME Sec 8 code and is fully capable of handling rated vacuum and pressure.


Control Box

The Control Box consists of a pneumatic switch for PTO Engage and Dis-Engage,
Speed Control ON/OFF switch and speed controller.



PRV & Snifter Valve

These are highly safety critical components which are Lloyd's Register approved .As the name implies pressure relief valve maintains a set pressure and the Snifter valve doesn't allow any excessive vacuum then set vacuum level. This also is used to cool pump by letting air in.

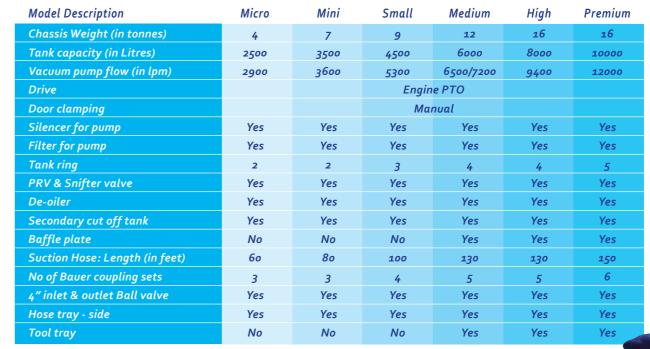

Optional Upgrades	Micro	Mini	Small	Medium	High	Premium
Stainless steel tank liner	Yes	Yes	Yes	Yes	Yes	Yes
Working Light on rear	Yes	Yes	Yes	Yes	Yes	Yes
Hose tray - top	Yes	Yes	Yes	Yes	Yes	Yes
Hydraulic door clamping	No	No	No	Yes	Yes	Yes
Hydraulic door opening and closing	No	No	No	Yes	Yes	Yes
Hydraulic tipping	No	No	No	Yes	Yes	Yes
De-odoriser	No	No	No	Yes	Yes	Yes
Lid for hose tray	No	No	No	Yes	Yes	Yes
Grid Lifter	No	No	No	Yes	Yes	Yes
Suction Boom: Manual	No	No	No	Yes	Yes	Yes
Suction Boom: Hydraulic	No	No	No	No	Yes	Yes
Pump drive and speed controller	No	No	No	Yes	Yes	Yes

Inlet and Outlet 4" Ball Valve

Very reliable valve with NBR Seals for perfect vacuum and pressure sealing.
Also Electro less Nickel plating ensures smooth operation without any jamming problem.

COINBATORE CITY WILLINGIDAL CORPORATION

Hose and Hose Tray

Hose Trays are suitable for storing 4 nos of 10 feet hose on each side.



These are high efficient filters which protect the pump by stopping the dirt entering the pump. A longer pump life can therefore be expected by using our state-of-the-art filters.



Imported Door Seal

Imported door seal ensures perfect sealing of door against the tank. High quality rubber ensure a long life.

De-oiler

The De-Oiler helps in removing oil from the exhaust before it is released to the atmosphere, thereby keeping the environment clean.

Vacuum Pump

These pumps are Imported from Italy and have Heat resistant vanes for Long life. They also come with INJET cooling for longer continuous operation.

Secondary Cut-off Tank

Bigger particles which are suspended in air stream are removed there by protecting the pump from any damage caused. Also this acts as additional cut-off if Primary cut-off in tank fails.



