



# PILOT OPTD. PR. REDUCING VALVE MODULAR ONSTRUCTION MPPM 06

ENGINEERING

1

Ref. No. P09247  
Release 06/2003

## Description


Pilot optd. pressure reducing valve modular construction for vertical stacking assemblies.

For Cartridge Valve details refer P09605

Interface conforming to  
ISO 4401 - AB - 03 - 04 - A  
IS 10187  
DIN 24340  
Four models available.



## Section

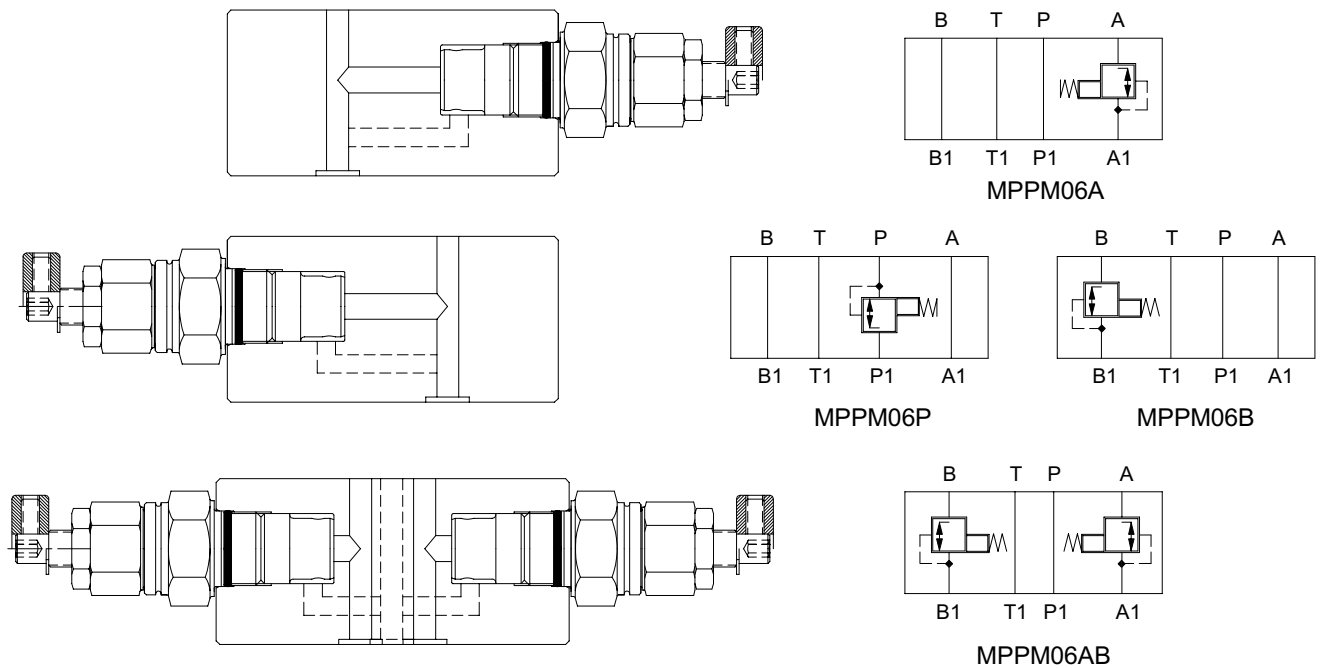

Hydraulic Symbol

**Polyhydron Pvt. Ltd.**  
78-80, Machhe Industrial Estate,  
Machhe, Belgaum - 590 014. INDIA.

**Phone** : +91-(0)831-411001  
**Fax** : +91-(0)831-411002  
**E-mail** : polyhydron@vsnl.com  
**Website** : www.polyhydron.com



PILOT OPTD. PR. REDUCING  
VALVE MODULAR ONSTRUCTION  
**MPPM 06**


ENGINEERING

2


Ref. No. P09247

Unit dimension


Dimensions in mm

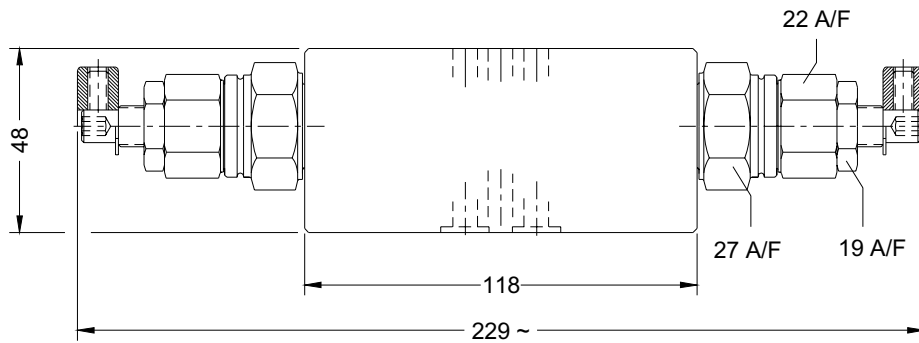


MPPM06AB

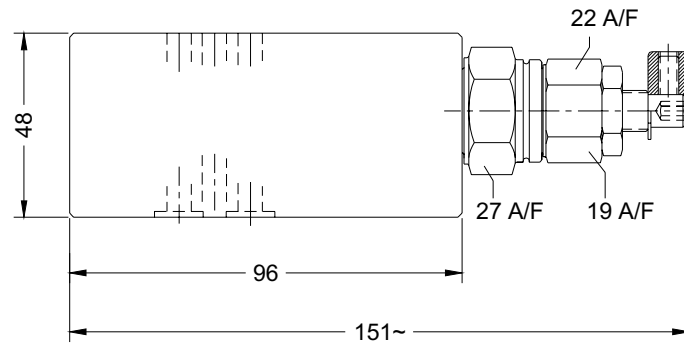

MPPM06A

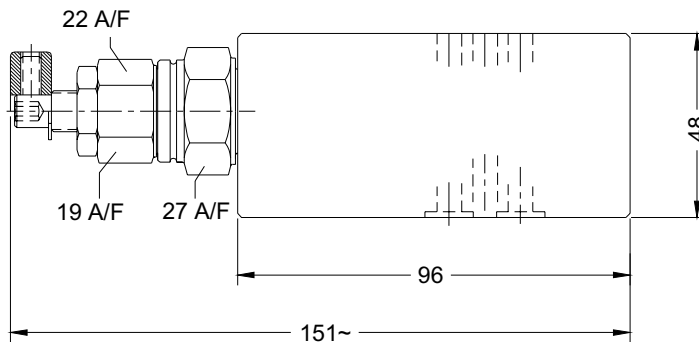

MPPM06P / MPPM06B

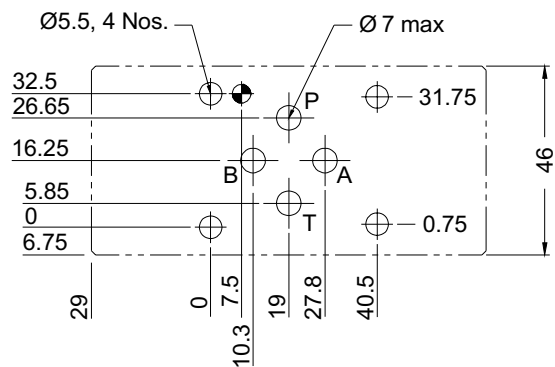

Interface



**PILOT OPTD. PR. REDUCING  
VALVE MODULAR ONSTRUCTION  
MPPM 06**

**ENGINEERING**


**3**

**Ref. No. P09247**

**Technical specification**

Construction .....	Modular(stackable type)
Mounting .....	Modular type, conforming to - IS 10187 ISO 4401 - AB - 03 - 4 - A DIN 24340
Mounting position .....	Optional
Direction of flow .....	As indicated by the hydraulic symbols.
Operating pressure .....	315 bar for all ports.
Cracking pressure .....	Refer PPR06 datasheet
Viscosity range .....	10 cSt to 380 cSt.
Fluid temperature range .....	-10 °C to +80 °C
Nominal flow handling capacity .....	30 lpm

**Ordering code**

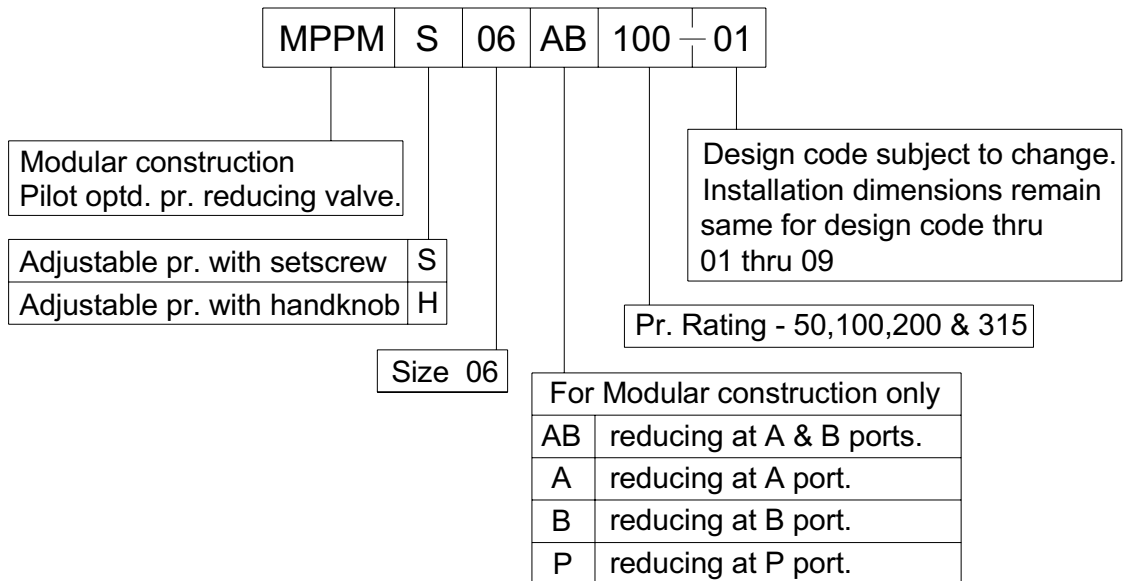

All rights reserved.  
Subject to revision.