

PRECISION  
TOOLS

An ISO 9001 : 2000 Company



"Shrinkin'Sleeves"

Precision Tools is a paramount P.V.C Heat Shrink Sleeve Manufacturer & Supplier from India. Shrinkin Sleeves Heat Shrinkable Sleeves developed was originated with the main motto of providing safe and durable insulated P.V.C Heat Shrink Sleeves for terminal ends and electrical Bus Bar Sleeves.

Presently, we are providing long-lasting insulated P.V.C Heat Shrink Sleeves for terminal ends and electrical Bus Bar Sleeves that offer maximum insulation. Our in-house production plant is well assembled with superior quality check machines to ensure the optimum quality production.

The true amalgam of rock steady infrastructural base and up-to-date equipments can be easily seen in the high quality of our electric products. We have a panel of result oriented experts that has voluminous practical experience in the field of insulated terminal ends, electrical Bus Bar Sleeves and termical ends. We strictly believe in simple concept its quality not quantity that matters for us. Precision Tools has carried out extensive research work in the field of various electrical products like insulated terminal ends, electrical Bus Bar Sleeves and termical ends.

## **Name of CEO**

**Mr. Nivritti Aher**

## **Nature of Business**

**Manufacturer, Exporter & Supplier**


## **Number of Employees**

**More Than 40**

## **Product & Services We Offer**

**P.V.C Heat Shrinkable Sleeve**

*Bus Bar Grade - Bb 100*

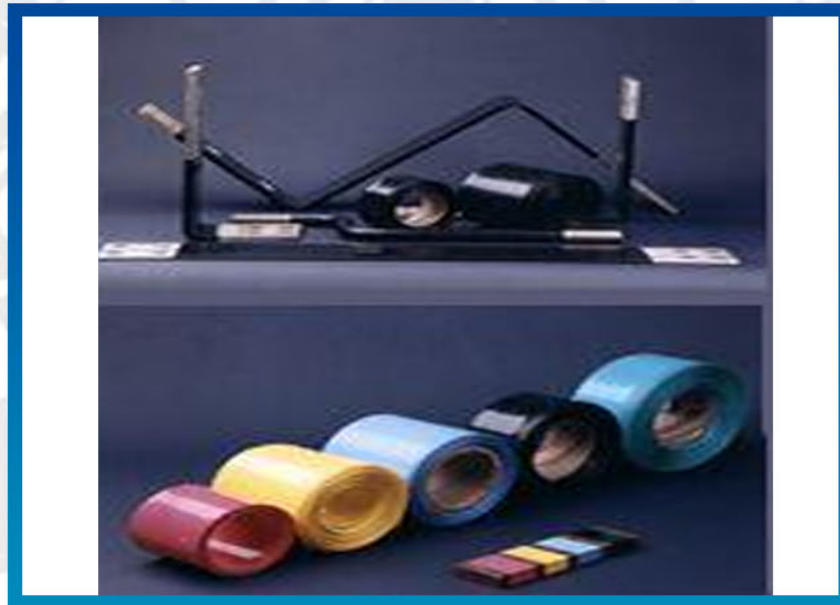

|                             |  |
|-----------------------------|--|
| TENSILE STRENGTH            | > 300 KG/SQ. CM.                       |
| ULTIMATE ELONGATION         | > 250 %                                |
| INSULATION RESISTANCE       | 3 X 10 <sup>6</sup> MEGA OHMS (AT R/T) |
| DIELECTRIC STRENGTH         | 12 KV (B.D.V.: 15 KV)                  |
| CONTINUOUS OPERATING TEMPT  | - 05 TO 1100 CENTIGRADE                |
| CORROSIVE EFFECT - NON COR- | RESISTANT TO ACID, ALKALIS & OIL       |
| ROSIVE                      | SELF-EXTINGUISHING, NON FLAMMABLE      |
| FIRE RETARDATION            | CREASED TYPE                           |
| TYPE                        | L/F SIZE 41MM TO 240 MM                |
| SIZES AVAILABLE             | 25 X 6 TO 200 X 12 MM                  |

*Capacitor Grade - Cp 200*




|                            |  |
|----------------------------|--|
| <b>TENSILE STRENGTH</b>    | <b>300 KG / SQ. CM.</b>                    |
| <b>TEAR STRENGTH</b>       | <b>75 KG / CM.</b>                         |
| <b>WATER ABSORPTION</b>    | <b>LESS THAN 0.5 %</b>                     |
| <b>DIELECTRIC STRENGTH</b> | <b>6 KV AT 0.10 MM THICKNESS</b>           |
| <b>HEAT RESISTANCE</b>     | <b>1050 C FOR 1000 HRS CONTINUOUS</b>      |
| <b>SHRINK RATIO</b>        | <b>MD 10 %; TD 40 %.</b>                   |
| <b>FIRE RETARDATION</b>    | <b>SELF-EXTINGUISHING, NON FLAMMABLE</b>   |
| <b>TYPE</b>                | <b>CREASED TYPE</b>                        |
| <b>SIZES AVAILABLE</b>     | <b>FOR DIA. FROM 4.00 TO 150.00 MM</b>     |
| <b>STANDARD COLOR</b>      | <b>BLUE GRAY, BLACK, VIOLET, AND GREEN</b> |

*Cable Lug Grade - Cl 700*




|                                  |                                   |
|----------------------------------|-----------------------------------|
| TENSILE STRENGTH                 | > 300 KG/SQ. CM.                  |
| ULTIMATE ELONGATION              | > 200 %.                          |
| INSULATION RESISTANCE            | (AT R/T) 3 X 106 MEGA OHMS        |
| DIELECTRIC STRENGTH              | 12 KV (B.D.V. 15 KV)              |
| SHRINK TEMPERATURE               | 1200 CENTIGRADE                   |
| SHRINK RATIO                     | MD - 10 % TD - 40 %               |
| OPERATING TEMPERATURE            | -05 TO 110 DEG CENTIGRADE         |
| CORROSIVE EFFECT - NON CORROSIVE | RESISTANT TO ACID, ALKALIS & OIL  |
| FIRE RETARDATION                 | SELF-EXTINGUISHING, NON-FLAMMABLE |
| THICKNESS                        | 0.20 MM TO 0.40 MM                |

*Refrigerator Grade Rg 500*

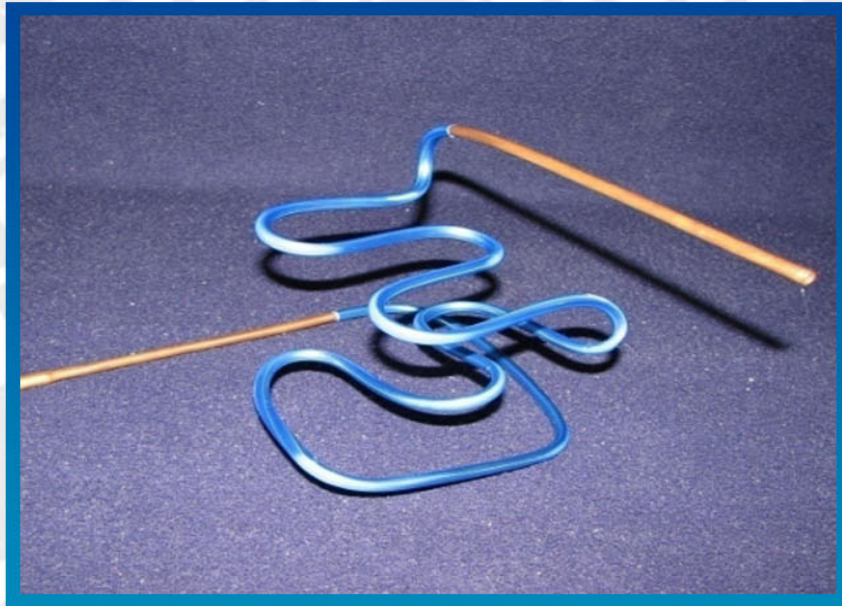

|                                  |                                     |
|----------------------------------|-------------------------------------|
| SHRINK TEMPERATURE               | 1200 CENTIGRADE                     |
| CORROSIVE EFFECT - NON CORROSIVE | RESISTANT TO ACIDS, ALKALIS & OILS  |
| FIRE RETARDATION                 | SELF-EXTINGUISHING, NON FLAMMABLE   |
| STD. COLOR                       | RED, GREY, BLUE CLEAR & TRANSPARENT |

## Dry Cell Battery Grade - Db 600

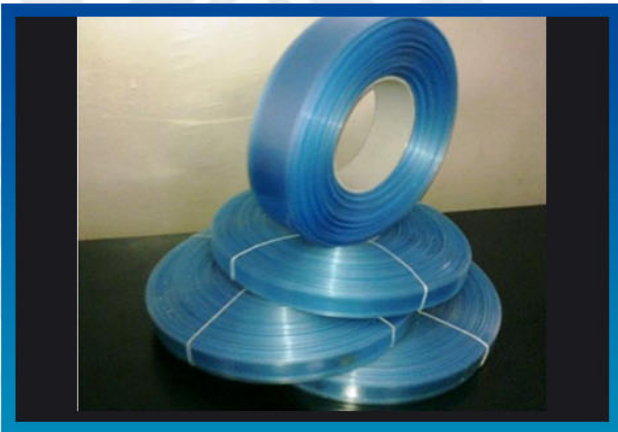

|                      |  |
|----------------------|--|
| Business Type        | Manufacturer, Exporter, Supplier, Retailer |
| Thickness            | 0.20 to 0.40 MM                            |
| Std. Length / Roll   | 50 to 100 meters                           |
| Shelf Life           | months, stored below 25o Centigrade        |
| Std. Color           | Red, Yellow, Blue & Black                  |
| Bus Bar Sleeves Size | 25 x 6 to 200 x 12 MM                      |

## Cable Terminal Ends Sleeves



|               |  |
|---------------|--|
| Business Type | Manufacturer, Exporter, Supplier, Retailer |
| Material      | Rubber                                     |
| Thickness     | 2.5-3mm                                    |
| Application   | Wire Harnessing Use                        |
| Color         | White                                      |
| Pattern       | Plain                                      |
| Features      | Crack Free, Durable, Quality Assured       |



## Contact Person

Aditya Aher



## Address

B-7, Street No 3, NICE, MIDC, Satpur, Nashik – 422 007. INDIA



## Mobile

+91-253-2350275, +91-253-2350975



## Call Us

Nivritti Aher +91-982-213-3111 / Ameya Aher +91-985-013-3111



## Email Address

shrinkinsleeves@dataone.in / shrinkinsleeves@gmail.com



## Web Address

<https://www.shrinkinsleeves.com>



## Web Page

<https://www.exportersindia.com/precisiontools>

<https://www.indianyellowpages.com/nashik/precision-tools-satpur-nashik-233622>

