



VIEW 'BB'

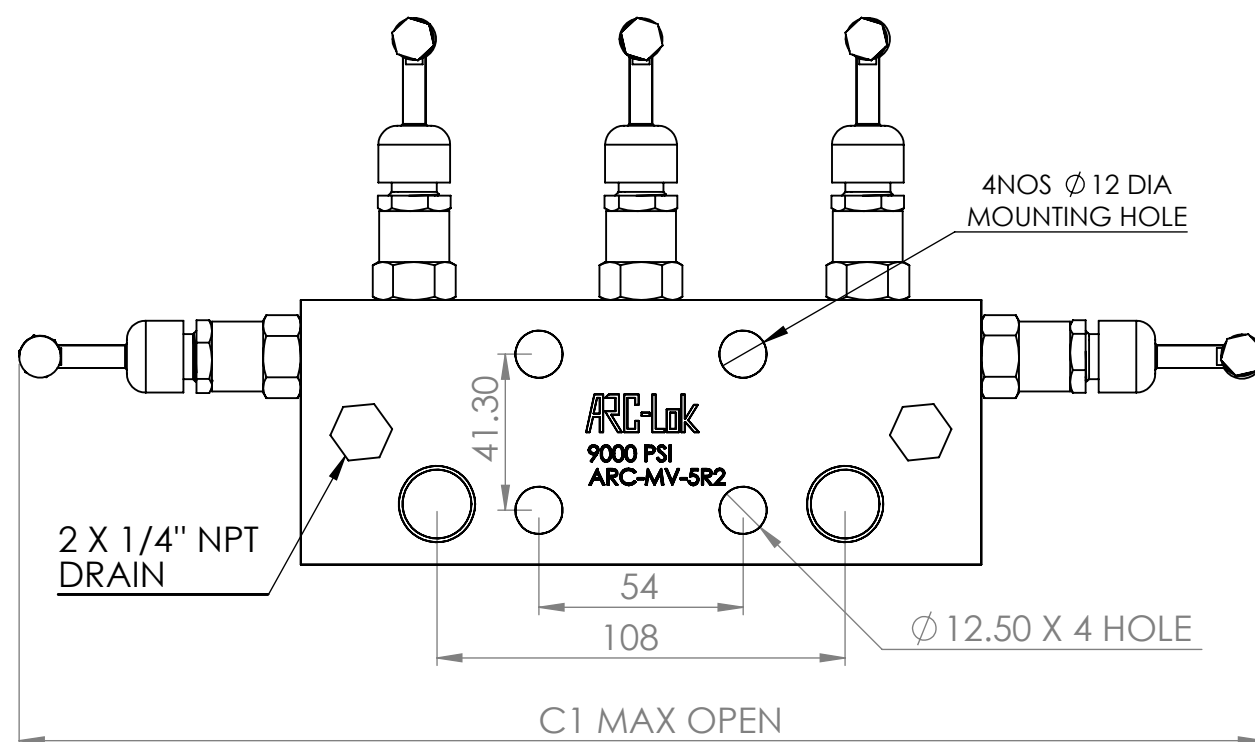

PLAN

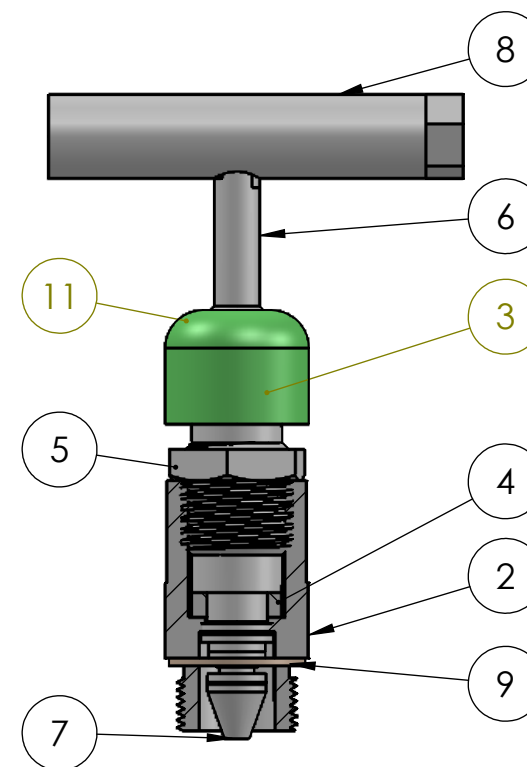

VIEW 'AA'

PART NO.	PART DESCRIPTION	MATERIAL	QTY.
1	BODY	SS 316	1
2	GLAND BODY	SS 316	1
3	GLAND RETAINER	SS 304	1
4	GLAND SEAL	P.T.F.E.	2
5	CHECK NUT	SS 304	1
6	SPINDLE	SS316	1
7	TRIM	SS 316	1
8	HANDLE	SS 304	1
9	WASHER	SS 316	1
10	LOCK PIN	SS 304	1
11	DUST CAP	P.V.C.	1

ARC-LOK 5 VALVE MANIFOLD REMOTE MOUNT CONNECTION DESIGNED FOR CONNECTING SYSTEM IMPULSE LINES & TRANSMITTERS. THIS MANIFOLD CONSISTS TO 1/2" NPT FEMALE CONNECTIONS ON 54MM. (2-1/8") CENTERS AND OF ONE EQUILIZER VALVE AND TWO BLOCK VALVE & ONE VENT VALVE.

FEATURES

316 S.S. BODY CONSTRUCTION FOR SUPERIOR CORROSION RESISTANCE. NON ROTATING VEE TIP PREVENTS GALLING & PROMOTES REPETITIVE SHUT-OFF OPTIONAL GRAPHOIL PACKING MATERIAL IS AVAILABLE FOR HIGH TEMP. RATING 1000 deg (F) @ 6000PSI

TESTING :

PENUMATIC TEST :- EACH VALVE IS TESTED WITH NITROGEN AT 100 PSI IN ACCORDANCE WITH MSS-SP-61 FOR SEAT & PACKING LEAKAGE


HYDRO TEST :- PERFORMED WITH PURE WATER IN ACCORDANCE WITH MSS-SP-61. BODY TESTED AT 1.5 TIMES & SEAT LEAKG TESTED AT 1.1 TIMES OF THE WORKING PRESSURE.

DESIGN STANDARD :-

PRESSURE & TEMPERATURE RATING ARE SELECTED FROM ANSI B 16.34 STANDARDS CLASS VALVAS BASED ON ANSI B16 CLASS 2500 OPTIONAL SOUR GAS SERVICE CONFIRMS TO NACE STD. MR-01-75

TECHNICAL DATA				
Seat	Pr. Rot	Temp. Rat		Cv
METAL SEAT	6000 PSI (41300 kpa)	PTFE -20 TO 250deg(F) (-29 TO 121deg(C)	GRAF OIL -20 TO 600deg (F) (-29 TO 315deg (C)	0.52 MAX.
				Orifice 4.8MM

NOTE :- 1) DIMENSION ARE IN MM.FOR REFERENCE ONLY SUBJECT TO CHANGE.

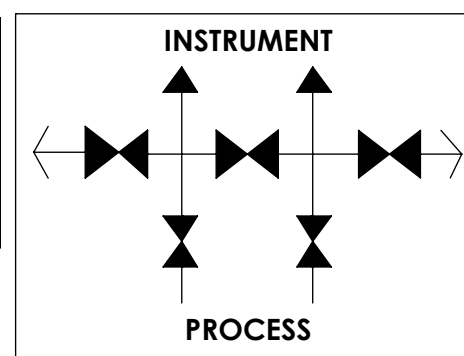

SCHEMATIC

REV: 00	TITLE	5 VALVE MANIFOLD(REMOTE MOUNT)
DATE : 30/07/16		
DRG BY : D.B.PATEL	PART NO:	ARC-MV-5R2
APPROVED : R.B YADAV	<div>ARC-Lok ARCELLOR CONTROLS (INDIA)</div>	
DATE : 30/07/16		