


## Main Distinguishing Features

**Crystar® Filtration Technology** ceramic membranes made of high purity recrystallized silicon carbide (RSiC) with an engineered microstructure. They are characterized by:

- a multilayer RSiC membrane with an engineered microstructure to ensure a **reliable and efficient separation process** with an excellent balance between **retention efficiency and permeate flux**.
- a RSiC carrier material with the **highest permeability** in the market, which enables high **permeate transfer** and **very effective backwash** or back flush operations.

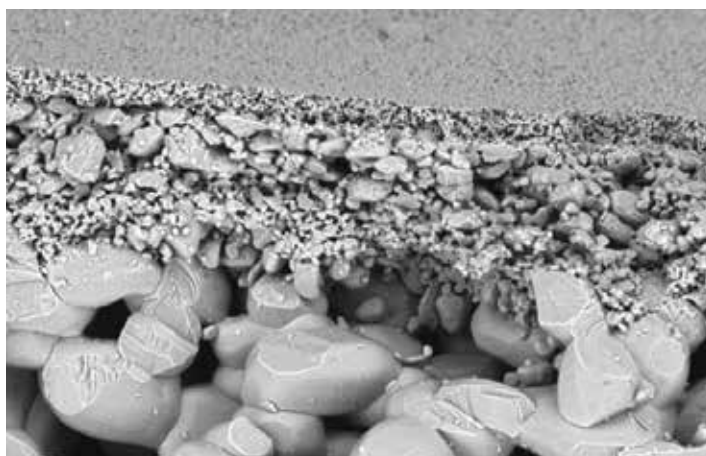

- The inherent properties of silicon carbide are perfect for the broadest range of filtration applications: excellent **thermal stability**, superior **thermal shock resistance** for fast and efficient chemical cleaning (CIP - clean in place) and high **chemical stability** under the harshest environments.

## Products

### Membranes pore sizes (as measured by mercury intrusion<sup>1</sup>)

250 nm


600 nm

1000 nm

3000 nm

Customized pore sizes in the range 250 – 3000 nm may be produced upon request. Contact Us!

Outer diameter (mm)	Channels diameter (mm)	Filtration area (m <sup>2</sup> /m)	Length (mm)
10	6	0.018	up to 400
25	17	0.053	up to 1178
25	3	0.30	up to 1178
41	3	0.76	up to 1200

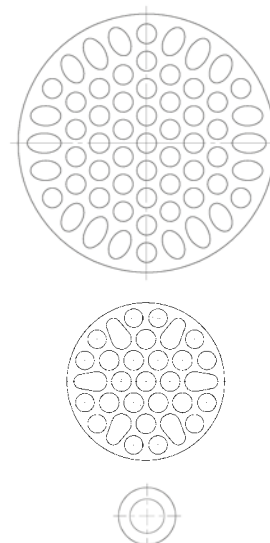

**Stainless steel and PVC housings** with O-ring sealing and different capacities are available for a straightforward use of Crystar® FT.

<sup>1</sup>Mercury intrusion is the preferred method to measure the physical pore size of porous materials.

## Benefits of Crystar® FT vs. Other Membrane Materials

Characteristics	Polymeric	Al <sub>2</sub> O <sub>3</sub>	TiO <sub>2</sub>	Crystar®
Thermal shock resistance	++	+	+	+++
Permeability	-	+	++	+++
Resistance to fouling	-	+	+	++
Chemical resistance	-	++	++	+++
Temperature stability	-	++	++	+++
Lifetime	+	++	++	+++
Weight	+++	-	-	++

## Applications

Clarification of beverages	Concentration of natural pigments
Bacteria and particulate removal from primary water or industrial and urban wastewater	Oil separation from produced water or oily wastewater
Concentration of inorganic powders	Pre-filtration prior to reverse osmosis

## Retention Efficiency Measurements for Microorganisms

### Crystar® FT600 (0.6 µm RSiC membrane)

- Escherichia Coli (size 0.5 µm x 1.5 µm): LRV = 4.2 (99.992% efficiency)
- Brevundimonas diminuta (size 0.2 µm x 0.5 µm): LRV = 3.7 (99.97% efficiency)

### Crystar® FT3000 (3.0 µm RSiC membrane)

- Cryptosporidium Parvum (4.5 µm): LRV > 4.4 (>99.996% efficiency)
- Legionella Adelaidensis (size 0.5 x 2.0 µm): LRV > 2 (>99% efficiency)
- Pseudomonas Aeruginosa (size 0.5 x 2.0 µm): LRV > 2 (>99% efficiency)

Saint-Gobain, the world leader in habitat and construction markets, designs, manufactures and distributes building and high-performance materials. We provide innovative solutions to the challenges of growth, energy efficiency and environmental protection.

The information contained in this document is believed to be accurate and reliable but is provided without guarantee or warranty on the part of Saint-Gobain IndustrieKeramik Rödental GmbH. Process parameters and requirements can impact typical values and test methods. Further, nothing present herein should be interpreted as an authorization or inducement to practice any patented invention without an appropriate license. Saint-Gobain IndustrieKeramik Rödental GmbH Terms and Conditions apply to all purchases.

### Saint-Gobain IndustrieKeramik Rödental GmbH

Oeslauer Straße 35 • 96472 Rödental • Germany

For more information

[www.crystarfiltration.saint-gobain.com](http://www.crystarfiltration.saint-gobain.com)

e-mail us at [crystarft@saint-gobain.com](mailto:crystarft@saint-gobain.com)

