



An ISO 9001-2015 Accredited Company





Mr. T. P. Tiwari - Chairman

We, **Superflow Pumps Pvt. Ltd.(SPPL)**, are pleased to present ourselves, as one of the Indian centrifugal pump manufacturer, with modern outlook, and committed to **"Make In India"** mission.

We have adopted modern design approach, successfully employing **CFD**, **FEA** design techniques. We use CNC machines to manufacture quality and precision product to achieve best pumps' efficiency. For our pumps to obtain highly efficient fluid flow profile, we use fine smooth quality Investment Castings. Our pumps are designed as per **ANSI 73.1/ ISO 2858** with closed as well as open type impeller design follows with easy maintenance configuration of back pull out design, essential for quick dismantling, repairs and inspection, without disturbing piping system.

We have computer-controlled **Vertical Turning Lathe** and **CNC Turning Machine** to ensure high precision machining of all components for better fitment of spare parts.

- At SPPL, every pump undergoes Performance test, in accordance with our quality policy. Client or his representative is always welcome to visit us to witness the Performance and Mechanical Running Test on Test Bed. The latest **Computerized data acquisition system** is installed for the pump testing facilities to ensure accurate performance test results. We can present the test data as per the testing standards in compliance with ANSI/HI 14.6 / PTC 8.2 codes.
- We have got facility to test pumps driven by Test-Motor through VFD drive which enables pump testing at any desired speed.
- Our Test facility also enables us to conduct NPSH test, on special demand by Customer.
- An Advanced Russian Vibration analyser is used for measurement of Vibration levels and can plot frequency spectrum and vibration signature of the pumps during test runs.
- Our In-house Dynamic balancer can achieve G2.5 level of dynamic balancing of impellers, to ensure that the pumps run with low levels of vibrations.

- SPPL has installed a special **Nozzle load measurement facility** on the lines of Japanese test facility, completely designed and installed, in house, to check pump assembly nozzle load carrying capacity. Pump assemblies are checked on the Nozzle load capability test bench to ensure and confirm that the pump nozzles are capable of sustaining specified nozzle loads, essential for safe piping loads and stresses.
- SPPL pumps are fitted with high quality Cartridge type Super Mechanical Seal, manufactured by our sister company. We can assure client to provide all maintenance spares for the seals, with quick deliveries and troubleshooting, as may be required during life of the pumps.
- SPPL's range pump spans over capacity spread of 3M³/Hr.
 to 1250 M³/Hr. and Head spread of 5 M to 150M.
- Centreline supported Pumps are offered to meet high temp. services in the range of 250°C to 400°C. Integral steam tracing installed on the Casing and Stuffing Box, with adequately sized insulation box, ensures to maintain casing temp., and permits pump to serve as hot standby.
- SPPL can supply pumps in C.I., C.S., CF8, CF8M, CN7M, Hastelloy, and Ni-resist, Ni-hard, and other corrosion resistant metals as per service demand. We can also supply low speed lined economical Pumps to cater to the special corrosive service conditions.
- Some of our recent satisfied clients are, Mangalore Chemicals and Fertilizers Ltd. for various services in SNF Plants, M/s. Oman Formaldehyde Chemical Company LLC, Sultanate of Oman; M/s. Sprea Misr For Chemicals & Plastics for World's one of the largest SNF Plant, M/s. National Company For Sulphur Products, Saudi Arabia for Newly installed Formaldehyde, SNF and Resin Plants. Also we have supplied pumps for projects like M/s. Saudi Universal Petrochemical Industrial Chemicals and M/s. Industrial Chemicals & Resins Co. (ICR) through our Jubail office.







JOURNEY OF API-610 PUMP DEVELOPMENT


2D DESIGN BASED ON DUTY CONDITIONS










CFD ANALYSIS












SHAFT DESIGN





FEATURES

- Back pullout pump design permits removal of the complete rotating element without disturbing suction/discharge piping and driver.
- Centreline supported heavy duty design to ensure high reliability under stringent operating conditions.
- Fully API-682 Mechanical seal and API 610 seal chamber for improved seal environment and life.













HORIZONTAL CHEMICAL PROCESS PUMP



CARTRIDGE CHEMICAL PROCESS PUMP



SEMI - OPEN IMPELLER PROCESS PUMP



TECHNICAL SPECIFICATIONS

Head: up to 100 Mtrs.
Capacity: up to 600 m3/hr.
Maximum temperature - 350DegC
Mechanical Seal - Metallic Below

APPLICATION AREAS

- For handling chemicals, acids, slurries, solvents, hot water
- Petrochemicals Refineries Paper plants Steel plants
- Effluent & sewage plants Textile plants ETP & STP, etc.

SELF PRIMING PUMP



TECHNICAL SPECIFICATIONS

Head: up to 35 Mtrs.

Capacity: up to 73 LPS • Motor: 1-10 HP

FEATURES

- Able to Handle suspended soft particles
- Automatic air release during priming
- Flatter Efficiency Curve.
- Replacable wearing parts



SUPERFLOW VERTICAL PUMP MODELS



VERTICAL MOLTEN SULFUR SUMP PUMP

'Superflow' SVP Vertical Sump Pumps are specially designed for long life and trouble free performance. The Special design for Molten Sulfur incorporates bearing intermediate bearings made of special Teflon compound, and lubrication by Molten Sulfur injected through a line tapped from discharge pipe. Line is adequately insulated/ jacketed to ensure lubricating sulfur in molten state.


Pump shafts are designed to ensure that the first critical speed exceeds running speed by at least 10%, to ensure that the vibrations are well within limits and resonance is avoided.

VERTICAL SUMP PUMP

'Superflow' SVP Vertical Sump Pumps are specially designed for long life and trouble free performance. The Special design of Intermediate journal bearings & high machining accuracy maintained by Superflow gives added life to pumps.


The pumps are used as dry pit & wet pit and driven by vertical flange mounted motor where NVSHR not re-quired.


The pumps are available upto 5000 mm Shaft length and max flow upto 150 M^3 Hr at 15 mtrs head. These pumps are suitable for coal washeries, mines, cement plants, irrigation, sea water, effluents, etc.

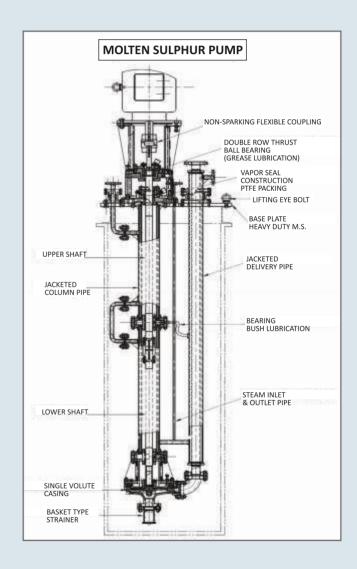



CHARACTERISTIC CURVES – CLOSED IMPELLER PUMP

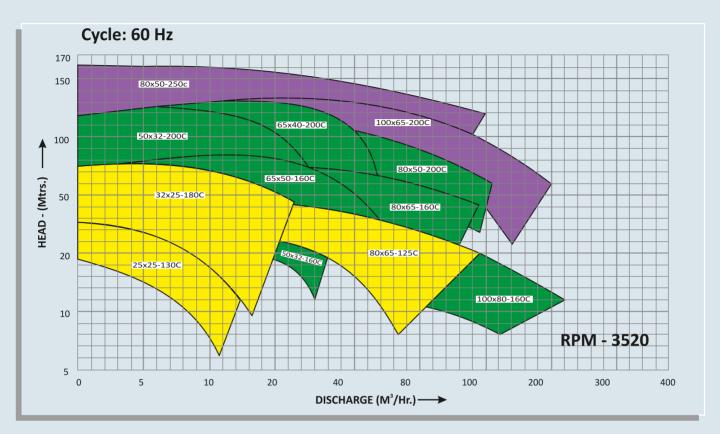


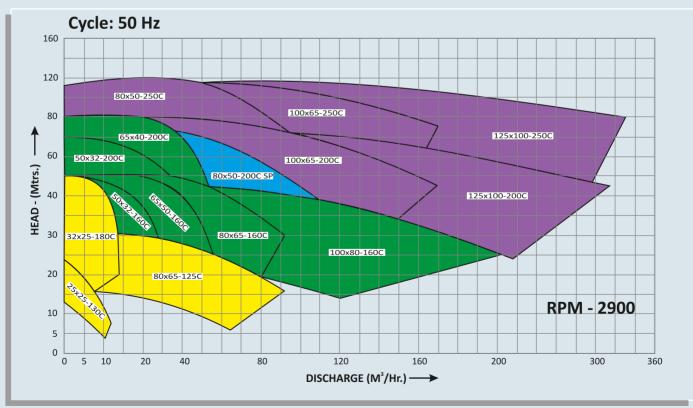


Note: Curve Tolerances as per ISO 9906:2012 Grade3b. In line with our company policy of continuing improvements, specification herein are subject to modifications without notice.



CHARACTERISTIC CURVES – CLOSED IMPELLER PUMP

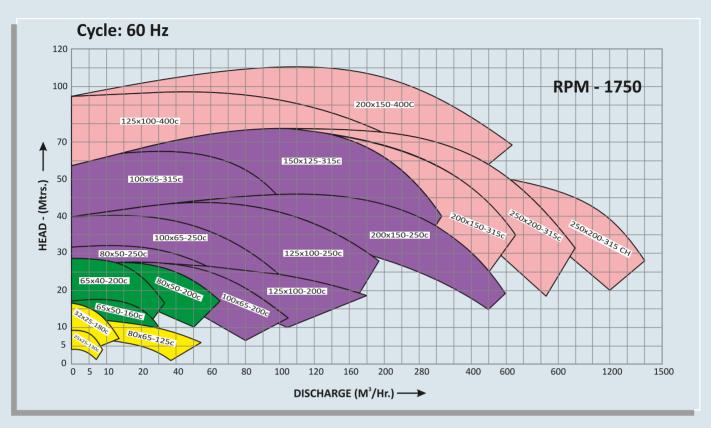

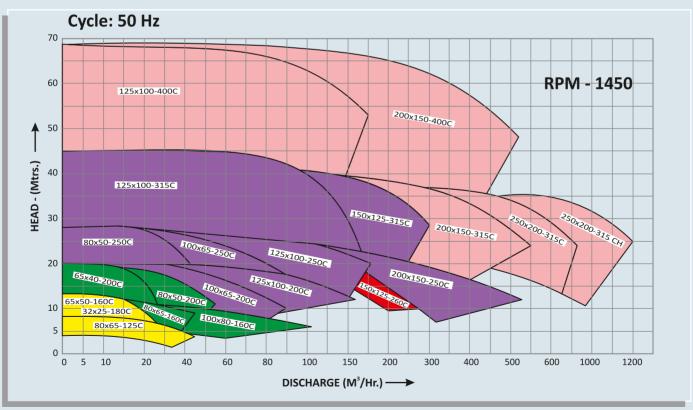


Note: Curve Tolerances as per ISO 9906:2012 Grade3b. In line with our company policy of continuing improvements, specification herein are subject to modifications without notice.


- CMYK







Superflow Pumps Private Limited with more than one decade of experience, are one of the pioneers in the designing and manufacturing of pumps in the Global market. Superflow Pumps are well known for their rugged construction and trouble-free performance. These pumps are made as per ISO 2858 and ISO 2454 International standard. These pumps consume less power due to better hydraulics and higher efficiencies.

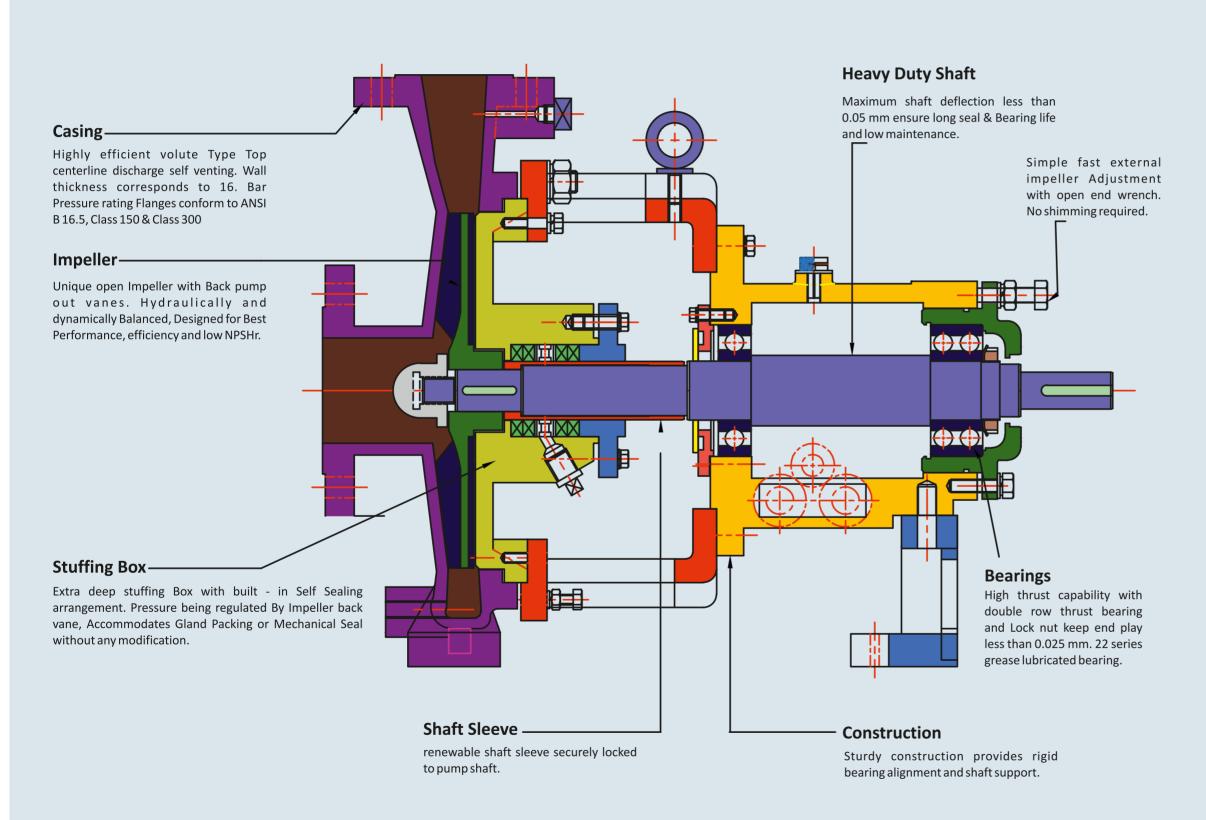

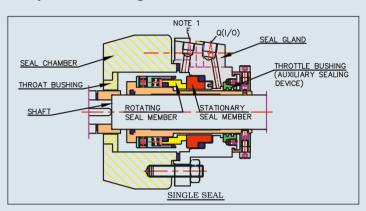

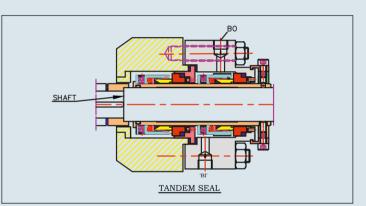

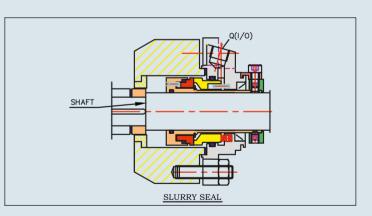

SYMBOL	DESCRIPTION
"F"	FLUSHING
"BI","BO"	BARRIER LIQUID INLET & OUTLET
"QI","QO"	QUENCHING INLET & OUTLET
"D"	DRAIN
"V"	VENT

NOTE 1: - THESE PLANS ARE FOR USE

ITHWTHE CONNECTION "F" ON THE SINGLE

-NDAUNPRESSURIZED DUAL SEAL ARRANGEMENT.









EXHIBITION







OUR INFRASTRUCTURE





HYDRO TEST BENCH






TESTING MACHINES







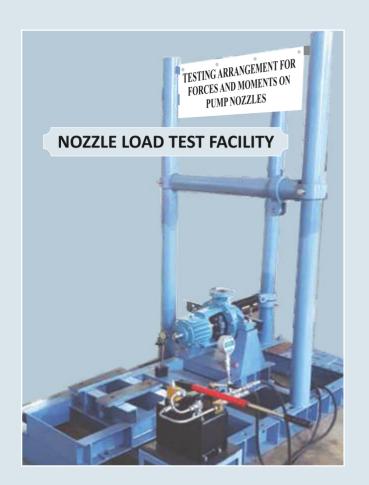







TESTIMONIALS















An ISO 9001-2015 Certified Company

Plot A-498, T.T.C. Industrial Area, MIDC Mahape, Navi Mumbai - 400 710. India Tel.: 97691 22842 / 97691 92843 / 98210 20774 Email: info@superflowpumps.com • Website: www.superflowpumps.com

Think Safety * Think Super

MARKETING OFFICES:

Maharashtra:

Mr. Anil Shukla

Gen. Manager - Marketing & Sales

Mobile: 09892552843

Email: mktg.gm@superflowpumps.com

Mr. Suyog Gujar

Marketing & Sales Mobile: 07021632753

Email: mktg.suyog@superflowpumps.com

Flat No. 102, "Ashiyana", 180, Shrinagar Main, Indore - 452 001, M.P.

Email: inmishra@supermechanicalseal.com

Mr. I. N. Mishra - 09826013332

Regional Manager

Kanpur:

PLOT No. 2761 AWAS VIKAS 3, KALYANPUR

KANPUR - 208017 (U.P)

Mr. S. P. Yadav

Mobile: 09793530850

Nagpur:

Plot No. 148, Chhatrapati Nagar, Wardha Road, Nagpur, Maharashtra - 440015

Mr. Pradeep Upadhyay Mobile: 9922403875

Saudi Arabia:

HUSAIN H. ATWAH WORKSHOP

P.O. Box 1316, Al-Jubail 31951,

Kingdom of Saudi Arabia

E-mail: amit@hatcoworkshop.com E-mail: hatcoestablishment@gmail.com

Mr. Amit Tiwari

(Workshop Incharge) Cell no.+966-541319644

Gandhidham:

Plot No. 49, Bholenath Society,

Survey No. 525, Nr. Kandla Airport,

Villege - Varsamedi, Taluka - Anjar (Kutch) - 370110.

Mr. Mukesh Upadhyay - 09825304782

Vapi:

Sunshine City, Block A-8, Plot No. 202, Desai Wada,

Chhiri - 396195 Vapi, Gujarat.

Mr. Pramod Kumar Patel

Mobile: 09825325220

Delhi (NCR):

Mr. Nitesh Upadhyay House No. 192-A, Third floor, Flat No. - 06, Gali No. - 11, Block- G, Near Stanford school

Molarband Extn., Badarpur,

New Delhi 110044 Mobile: 09167264727

Ankleshwar:

F-15, Raviraj Appartment,

Behind Ravi Complex,

Near Valia Chowkadi, G.I.D.C.,

Ankleshwar - 393 002 (Gujarat)

Mr. S. N. Mishra - 09825304622 Regional Manager

Email: snmishra@superflowpumps.com

Ahmedabad:

23, Santdev Tenament,

Jamfalwadi, C.T.M. Ahmedabad - 382 449 (Gujarat)

Mr. K. P. Singh - 09825304621

Area Manager

Vadodara::

J-405, 4th Floor, VIRAM-2, PHASE-2 B/H BILLABONG SCHOOL,

Nr Narayan Farm

VADODARA - 390011 (GUJARAT) Mr. ANIL KUMAR PANDEY - 0997899213

Marketing Executive

Kerala:

TRA-103, PULLOLICAL HOUSE THAIKKATTUSSERY. P.O. OLLUR, THRISSUR-DIST. Pin - 680 306

Mr. Ajeesh Joy - 9539925874

Marketing Executive