



TrueChrome Serices

Built-in Measurement HDMI Camera

Camera built-in mouse control function, matches with HDMI dedicated HD display, to bring you a portable tour for scientific photography anywhere.

ISO9001 CE  RoHS

Built-in mouse control

The TrueChrome series possess a perfect color reproduction capability, customers can perform the following through mouse in HDMI mode: capture, processing, measurement, save, export etc, quite convenient to operate without a computer. Users can choose the most suitable model based on different applications:

- TrueChrome AF
- TrueChrome Metrics
- HD Lite




TrueChrome AF Built-in autofocus

TrueChrome AF offers both continuous and singleshot autofocus modes. It also supports mouse wheel control for fine-tuning. Data transfer up to 60 frames per second enables users to get clear images with ease.



The Essence of TrueChrome Metrics


TrueChrome Metrics provides extremely powerful measurement functionalities including, freehand line, rectangle, polygon, circle, bicircle, angle, point-line distance and much more. Three different length units of millimeter, centimeter, and micrometer are provided to meet various measurement requirements in different applications.

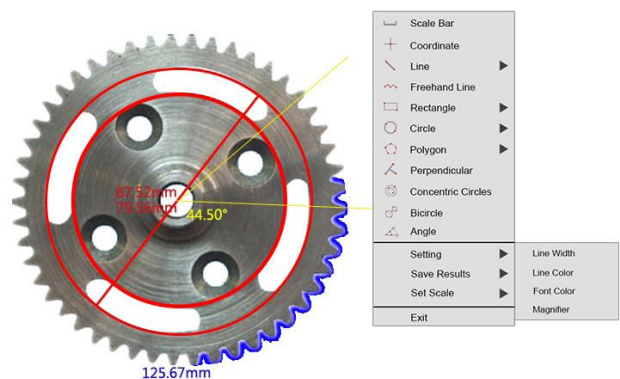

Tailor-made 1080P HD Monitor


In order to let users better feel the excellent quality of the Tucsen cameras, we specially customized a 1080P high-definition display screen - Retina Screen, which perfectly matches the performance of TrueChrome camera.

Note: Retina Screen is an optional accessory that users can choose to use.

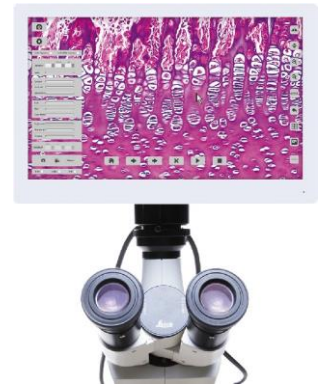


Sample >>
Applications

Pathological analysis



Pathological analysis requires that the image color fidelity be 100% accurate, especially for digital imaging, it has great claims for the purple blue color rendition. With perfect performance for purple blue colors, TrueChrome Metrics ensures precise and accurate pathological images.

Material qualification




Industry applications highly require excellent clear and sharp images without any delay, up to 60fps high definition live preview from TrueChrome Metrics allows you to comfortably and efficiently perform quality inspection.

Teaching



In teaching presentations, the lecturer can use a computer to set up a specimen and project the specimen images to a big screen for students to view. TrueChrome Metrics allows a dual live video stream to a PC and any imaging device with HDMI interface.

Fluorescence imaging



When it comes to low light applications, it crucial to have a high sensitivity camera, with up to 10 seconds exposure capability. This means the TrueChrome Metrics is 300 times more sensitive than the other HDMI cameras in the market.

Medical anatomy recording



Need to record the microsurgery procedures clearly and fluently? TrueChrome Metric's high definition with fast speed recording capability offers superb documentation at 1080P 30fps.

Camera specification

Model	TrueChrome AF	TrueChrome Metrics	HD Lite
Sensor Type	CMOS	CMOS	CMOS
Sensor Size	1/2.8"	1/2.8"	1/2.5"
Image Processor	Built-in ISP	Built-in ISP	Built-inISP
Dynamic Resolution	2MP, 1920x1080	2MP, 1920x1080	2MP, 1920x1080
Static Resolution	6MP, 3264x1836	6MP, 3264x1836	5MP, 2592x1932
Frame Rate	30fps @USB2.0 60fps @HDMI	30fps @USB2.0 30fps @HDMI	15fps @USB2.0 15fps @HDMI
Capture	SD card(16G)	SD card(16G)	SD card(8G)
Video Recording	30fps @SD 30fps @PC	30fps @SD 30fps @PC	15fps @SD 15fps @PC
Exposure Mode	Auto/Manual	Auto/Manual	Auto/Manual
Exposure Time	0.001s-10s	0.001s-10s	0.001s-10s
White Balance	Auto/Manual	Auto/Manual	Auto/Manual
Setting	White Balance,Gamma, Noise Reduction,WDR, Exposure Time,Gain.	White Balance,Gamma, Noise Reduction,WDR, Exposure Time,Gain.	White Balance,Gamma, Noise Reduction,WDR, Exposure Time,Gain.
Built-in Software	Cloud 1.0 Ver	Cloud 1.0 Ver	Cloud 1.0 Ver
PC Software	Capture V 2.0	Capture V 2.0	TCapture
Output Interface	USB2.0, SD, HDMI	USB2.0, SD, HDMI	USB2.0, SD, HDMI
Comp&atible OS	Windows 7 and above	Windows 7 and above	Windows XP and above
Optical Port	Standard C-Mount	Standard C-Mount	Standard C-Mount
Size & Weight	90.7x78x70.8(mm), 452g	90.7x78x70.8(mm), 440g	90.7x74x67.2 (mm), 265g

Retina Screen Features

Display Resolution	1080P(1920x1080)	Display Type	IPS-Pro
Screen Size	11.6 inch	Aspect Ratio	16:09
Brightness	320 cd/m2	Static Contrast Ratio	1000:01:00
HDMI Port	1	Power Supply Type	12V, 2A
Size	282.0x180.5x15.3 (mm)	Size & Weight	600g

System Components

One screen with brackets
One camera (with SD card)
Five butterfly screws
12V/2A power adapter
Y power splitter cable
2m HDMI cables
0.5m HDMI cables
USB mouse and cable



Note: It is recommended to use the TrueChrome camera combo kit with complete accessories and plug and play.

