



SUN-ARCH INDUSTRIES is an ISO 9001:2015, ISO 14001:2004 certified company that manifests its credibility in the market. Our range encompasses Spanish Roofing Tiles, UPVC Roofing Sheets, Roofing Accessories. Delivering best quality under most reasonable price is our perpetual goal; our products are supported by well-established quality assurance department. Currently operational from Morbai, Gujarat, we are dealing throughout India with our exporting interests in countries like South Africa, Kenya, and UAE. We are committed to bring new innovations and to take our products to absolutely zero defect status.

ABOUT US

It given us immense pride to introduce to you "SUN-ARCH UPVC roofing sheet" the practical, modern, green, long life as well as cost effective solution to industrial construction mainly used for industrial shed, factories, chemical and pharmacy applications, corporate project, warehouses, houses, farms and farm storage, parking lots, public utility places like railway stations and numerous other site applications having a life of more any conventional roofing material. This UPVC (Unplasticised polyvinyl chloride) tile is the best replacement to conventional asbestos, metal G.I sheets and PVC sheets considering the heat insulation, sound insulation, water resistance, chemical and alkali resistance, corrosion proof, fire retardant, Eco friendly, easy to install and move. It has captured many international certification for its genius properties. Apart from its numerous benefits, its salient features include heat insulation up to 40% (highly energy efficient as per ECBC 2007) and it can withstand high temperatures. We have already supplied to factories of some reputed business houses in various parts of India and have received a very strong acceptance in requirements for new projects as well as replacement projects. We would like you to use the benefits of modern, useful, long life and friendly construction by considering using this Sun-Arch UPVC Roof Sheet, SUN-ARCH INDUSTRIES is a vision which was materialized by Mr. Rajul, the CEO of the company. Established in the year 2009, the company with its sheer dedication and focus has become one of the renowned Plastic Transparent Sheets, Roofing Ridge Tiles and UPVC Roofing Sheets Manufacturers, Exporters and Suppliers in India. Based in Gujarat (India), SUN-ARCH INDUSTRIES have expanded its reach to various countries like South Africa, Kenya, and UAE. Infrastructure Though, we are a young player in market, but our state of the art infrastructure has played a significant role in the steady growth of the company. We possess technologically advanced machineries and equipment to maximize the production of Plastic Transparent Sheets and all other products. Team Work We have a team of skilled and highly professional workers who assiduously work to meet company's sole objective i.e. Complete Customer Satisfactions. Our team members are well versed with the detailing of machineries, thus ensuring a flawless manufacturing every time.

Upvc Plain Profiles


Material : Upvc Finishing : Polished

Thickness : 1.5, 2.0 (mm.)

Width : 1220 mm (1.22mtr.) Length : 2.0, 2.5, 3.0 (mtr.)

Color : White, Gray, Terracotta, Green, Blue,

etc.



Trapezoidal Profiles

Material : uPVC

Shape : Trapezoidal

Area of

Application : Residential & Commercial

Surface

Color

Treatment : Galvanized
Thickness : 1 to 3 mm

Pitch : 195+/-2.5 mm Crest Height : 32+/-2 mm



Wall Cladding Profiles


Material : uPVC

Thickness : 0.13 to 0.6mm

Color : Available in Different Colors

Width : 600 to 1250mm

Surface Finish : Painted technique : Galvanized Usage : Cladding



Round Wave Profile

Material : uPVC

Thickness : 1.0, 1.5, 2.0, 2.5, 3.0 (mm.)


Width : 1130 mm. (1.13mtr.)

Cover Width : 1080 mm (1.08mtr.)

Length : 2.0, 2.5, 3.0, 3.66 (mtr.)

: White, Gray, Terracotta, Green, Blue,

etc.



Self Drilling Screw

Material : Stainless Steel, Zinc, Zylone

Diameter : 1-5mm Length : 10-20mm

Application : Resembling Roofing

Surface

Treatment : Hot Dip Galvanizing Standard : AISI, ASTM, DIN

Surface : Polished



FRP Louvers

Material : FRP

Application : Buildings, Commercial and Domestic

Complexes, Industries


Surface Treatment Heat Treatment, Oil Coating

Thickness : 14 mm Type : Shutters

Opening

Pattern : Horizontal

Size : 1000 mm x 1200 mm



FRP Ventilator Base Plate

Material : FRP

Neck Diameter : 600 mm Design : Standard


Application : Ventilator Base

Surface T

reatment : Powder Coated

Light Transmission Upto 89%

Fire Performance: Self Extinguishing



FRP Curved Roofing Sheet

Material : FRP

Thickness : 1mm - 3mm

Color : Multicolor

Finishing : Polished

Features : Durable, Fine Finish, Good Quality,

Tamper Proof, Water Proof

Application : On Roof For Skyligth For Day Ligth.

Length : 10-30 Meters



FRP Translucent Sheet

Material : FRP

Use : Roofing Use Thickness : 2.5-3mm

Color : Translucent, Available in many colors Feature : Fine Finish, Good Quality, Tamper

Proof, Water Proof

Finishing : Non Polished



FRP Louvers

Material : FRP

Application : Buildings, Commercial and Domestic


Complexes, Industries

Surface

Treatment : Heat Treatment, Oil Coating

Thickness : 14 mm
Type : Shutters
Opening Pattern : Horizontal

Size : 1000 mm x 1200 mm



FRP Ventilator Base Plate

Material : FRP

Neck Diameter : 600 mm Design : Standard

Application : Ventilator Base

Surface

Treatment : Powder Coated

Light

Transmission : Upto 89%



PVC Cap

Size : 20-25cm
Material : Pvc
Shape : Round
Color : Multicolor
Pattern : Plain

Features : Seamless Finish



FRP Corner Angle

Shape : L Shape Thickness : 4 - 8 Mm


Material : FRP

Length : 3000 mm

Application : FRP civil structure, Cable support

routing, Support section

Temperature : 150 Degree
Technique : Pultrusion
Height : 250 mm



Air Turbo Ventilator

MOC Of Top Cover and

Bottom Ring : Stainless Steel
MOC Of Fins : Aluminium

Max Exhaust

Capacity: 2700 C.F.M. Height: 400 mm Fan Weight: 4.0 Kilos



Aluminium Profile Louvers

Material : Aluminium

Max Working

Pressure : 150 PSI

Working

Temperature : 1 to 60 deg C Thickness : 6mm - 8 mm

Feature : Water Proof, Tamper Proof,

Corrosion Resistant, Durable

Coating



Spanish Roofing Tiles

Material : Clay
Use : Roofing
Thickness : 8-10mm
Color : Orange
Pattern : Plain

Features : Attractive Look, Durable, Fine Finish,


Perfect Shape, Shiny Look

Weight: 2.8 Kilograms (kg)

Water Absorption: <0.5%



CONTACT US

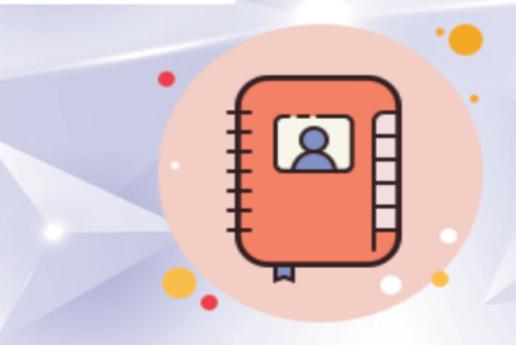



Mr. Ronak Shah, Mr. Raju Patel

E-64, Ananta swagatam, Nr. Pratham Rivera, B/S ,shree Hari Duplex,

Bh.Narayanwadi Restorent, Altladara -Bil Road, Vadodara-391412 Gujarat

Mobile: +91-9548495484,+91-8866090091

WebSite: www.sunarch.co.in/

WebPage: www.exportersindia.com/sunarchindustries/

