




## High Discharge Submersible Pumps

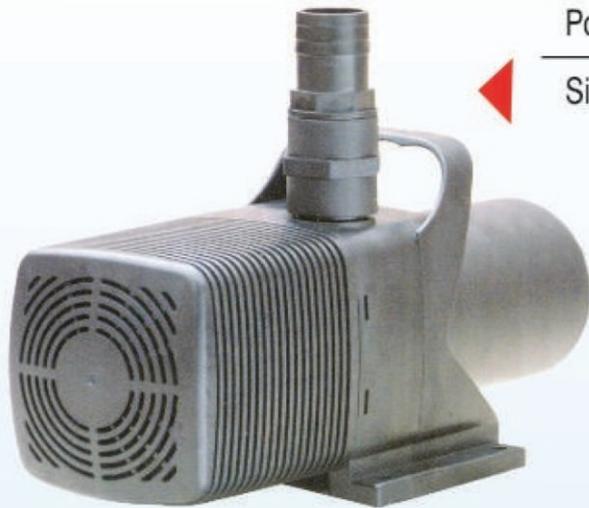

### HDS1008

### HDS2312


Max. Delivery Height	7500L/H	12000L/H
Max. Height	4.2 m	7.5 m
Power	100 W	230 W
Outlet Connection	25mm (1")	25mm (1")
Intake Connection	25mm (1")	25mm (1")
Power Cord	5-10 m	5-10 m
Size(mm)	308x128x148mm	308x128x148mm

### HDS5025

### HDS5033

### HDS7038

Max. Delivery Height	25000L/H	33000L/H	38000L/H
Max. Height	9.2 m	11m	11.5 m
Power	500 W	500 W	700 W
Outlet Connection	38mm (1½")	51mm (2")	51mm (2")
Intake Connection	38mm (1½")	51mm (2")	51mm (2")
Power Cord	10 m	10 m	10 m
Size(mm)	388x175x203mm	398x175x203mm	398x175x203mm

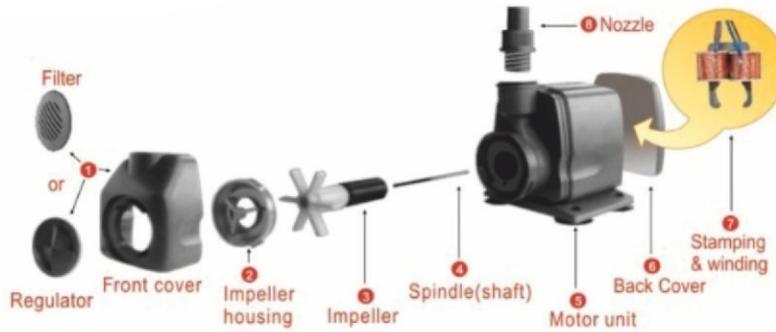

## WIDEST RANGE



## TECHNICAL SPECIFICATION

Model No.	Power Consumption	Outer Nozzle Size	Maximum Head	Maximum Cooler Height Recommended
MSP 305	12W	1/2"	1.2m (4 Ft.)	0.9m(3 Ft.)
ECO 34	18W	1/2"	1.8m (6 Ft.)	1.4m (4.5 Ft.)
MSP 350	18W	1/2"	1.5m (5 Ft.)	1.2m (4 Ft.)
MSP 610	38W	3/4"	2.4m(8 Ft.)	1.8m (6 ft.)
MSP 650	40W	3/4"	2.4m (8 Ft.)	2.1m (7 Ft.)
MSP 800	50W	3/4"	2.7m (9 Ft.)	2.4m (8 Ft.)
MSP 1000	85W	3/4"	3.2m (10.5 Ft.)	--
MSP 1200	120W	1"	3.8m( 12.5FT)	--
MSP 1500	230W	1"	5m( 16.5 Ft.)	--

*Our pumps have long lead wire to avoid risky joints*

## INDOMA - KNOW US BETTER

We at INDOMA always believe in doing something different. We revolutionized the desert cooler industry in 2002 by introducing

Due to it's easy installation, energy saving, submersible system, zero noise, the vertical pump became obsolete.

Though many have copied this product, for quick gain from its popularity, they are far removed from quality & reliability.

We have brought in several other revolutions by launching world's first portable cooler & shock safe immersion rods for heating.

## WE ALSO BROUGHT TO YOU THE REVOLUTIONARY

