



"MMP" SERIES

APPLICATION

- Irrigation.
- Industries for clear water handling
- Water supply for domestic use in apartments, Buildings and hotels.
- MMP Series Three Phase Pumps : Single stage, High speed horizontal, Centrifugal , Monoblock with volute type delivery casing

FEATURES

- Can withstand wide voltage fluctuation – from 300-440 volts.
- Suction lift up to 7.5 meters.
- Top flat efficiency curve : minimum efficiency variation in the entire operating range
- Efficiency at par with internationally available pumps – higher up to 10 points than minimum required by Indian standards specification
- Models are with IP – 44 protection. Models with IP – 55 protection are also available on request
- Class of insulation 'B' ('F' Class for 9.3 kw and 11.0 Kw ratings).
- Designed to prevent overloading and motor burning
- Dynamically balanced rotating parts ensure minimum vibrations
- Replaceable wearing parts results in longer life
- Designed for automatic air release during priming
- Continuous rated motor
- Inside and outside of pump covered by anticorrosive paint
- Both single phase and three phase motor are available as per requirement and will be customised as per customer requirement

RANGE

- **Head** : Up to 90 meters
- **Capacity** : Up to 40 liter per second
- **Power rating** : Up to 30 hp

MATERIAL OF CONSTRUCTION

- **Impeller** : cast iron
- **Delivery casing** : cast iron
- **Motor body** : cast iron
- **Shaft** : EN-8
- **Shaft sleeve** : SS - 410

OPTIONAL SUPPLY

- **Impeller** : Bronze / stainless steel
- **Shaft** : Stainless steel
- **Shaft Sleeve** : Chrome Steel



Flange mounted motor bare pump
for model



Are available in monoblock seal version only and also as a bare pump and flange mounted version with different MOC



"MMP" SERIES

WATER RATING CHART

APPROXIMATE PERFORMANCE OF MMP SERIES, 2 POLE, MONOBLOCK PUMP, RATED VOLTAGE, 50 HZ, THREE PHASE A.C. POWER SUPPLY																				
PUMP MODEL	POWER RATING		PIPE SIZE		TOTAL HEAD IN METER															
	KW	HP	SUC	DEL	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
					CAPACITY IN LITERS PER SECOND															
MMP-0515	0.37	0.5	25	25	2.0	1.9	1.8	1.0	0.2											
MMP-130	0.75	1.0	25	25			2.7	2.3	2.1	1.8	1.3	0.9	0.7	0.4	0.0					
MMP-115	0.75	1.0	40	40		5.4	4.7	3.8	1.7	1.5										
MMP-224	1.5	2.0	50	50				5.8	5.3	5.0	4.7	3.5	3.0	2.0	2.0	1.2				
* MMP-325	2.2	3.0	65	50			9.2	8.8	8.4	7.9	7.4	7.0	6.4	5.8	4.9					
* MMP-335	2.2	3.0	50	40				5.0	4.9	4.8	4.7	4.6	4.4	4.2	4.0	3.8	3.6	3.2	2.7	2.0
MMP-515	3.7	5.0	100	100	32.8	31	28.0	24.2	19.0	12.8										
MMP-520	3.7	5.0	80	80	23.5	22.8	21.9	20.8	19.4	17.7	15.9	13.9	10.8							
MMP-527	3.7	5.0	80	65						14.2	13.4	12.6	11.6	10.3	8.7	5.8				
* MMP-538	3.7	5.0	65	50								8.5	8.4	8.3	8.1	7.8	7.6	7.1	6.5	5.8
MMP-822	5.5	7.5	100	100				27.1	25.5	23.9	22.0	20.0	17.5	14.2						
* MMP-830	5.5	7.5	80	65						19.0	18.2	17.3	16.4	14.2	13.0	11.1				
MMP-837	5.5	7.5	65	65										12.6	12.4	12.1	11.8	11.3	10.0	9.2
MMP-1030	7.5	10.0	100	100				31.9	30.7	29.4	28	26.5	25	23.3	21.2	17.5		13		
MMP-1331	9.3	12.5	100	100							33.3	32	30	28.5	26	23.3	19.5	13		
MMP-1537	11	15.0	100	100							36.7	35.8	34.1	33.3	32	30	27.6	25	20	17.5

PUMP MODEL	POWER RATING		PIPE SIZE MM		TOTAL HEAD IN METER															
	KW	HP	SUC	DEL	28	32	36	40	44	48	52	55	60	64	68	72	76	80	90	94
					CAPACITY IN LITERS PER SECOND															
MMP-550	3.7	5.0	50	40			4.1	3.9	3.7	2.7	2.0									
* MMP-852	5.5	7.5	65	50		8.6	8.1	7.5	6.8	5.9	4.5	3.5								
* MMP-1040	7.5	10.0	80	65	17.8	15.9	13.3	9.5			18 M HEAD AT 20 LPS									
MMP-1065	7.5	10.0	65	50				7.5	7.1	6.8	6.4	6.0	5.3	4.3	3.0					
MMP-1348	9.3	12.5	80	65	17.9	17.0	16.0	14.8	11.6		20 M HEAD AT 19 LPS									
MMP-1372	9.3	12.5	65	50					8.0	7.9	7.8	7.6	7.2	6.2	5.6	3.0				
MMP-1555	11.0	15.0	80	65		19.2	18.3	17.3	15.8	14.6	11.0	9.7								
MMP-1575	11.0	15.0	65	50						8.3	8.0	7.8	7.4	7.0	6.5	5.8	4.5			

PERFORMANCE TABLE (SPEED 1450 RPM) DISCHARGE IN LPS															
PUMP MODEL	KW	HP	SUC	DEL	TOTAL HEAD IN METER										
					5	6	8	10	12	14	16	18	20	22	
MMP-512	3.7	5	100	100											
MMP-810	5.5	7.5	150	150											
MMP-818	5.5	7.5	100	100	63	60	53	41							
MMP-1014	7.5	10	150	150					34	32.1	29	25.5	19.2		
MMP-1022	7.5	10	100	100					73	68	51	30.4	18.3		
											36.3	33	29.2	24	18




"MMP" SERIES

WATER RATING CHART

PUMP MODEL	POWER RATING		PIPE SIZE MM		TOTAL HEAD IN METER															
					6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
	KW	HP	SUC	DEL																
MMP-335	2.2	3.0	50	40				5.1	4.95	4.8	4.65	4.5	4.35	4.2	4.0	3.8	3.55	3.2	2.75	2.0

PUMP MODEL	POWER RATING		PIPE SIZE MM		TOTAL HEAD IN METER																			
					18	20	24	28	30	32	36	40	45	48	50	55	60	64	68	72	76	80	85	90
	KW	HP	SUC	DEL																				
MMP-550	3.7	5.0	50	40							4.0	3.7	3.2	2.85	2.0									
MMP-855	5.5	7.5	65	50						8.6	8.1	7.5	6.5	5.7	4.5	3.5								
MMP-868	7.5	10	65	50								7.5	7.1	6.8	6.4	6.0	5.3	4.3	3.0					
MMP-1372	9.3	12.5	65	50									8.0	7.9	7.8	7.6	7.1	6.1	5.6	3.0				
MMP-1576	11.25	15	65	50									8.3	8.0	7.8	7.4	7.0	6.5	5.8	4.5				
MMP-1585	11.25	15	65	50											13.0	12.5	12.0	11.0	10.5	1.0	8.0	5.0	3.0	
MMP-2580	18.5	25	80	65													17.0	16.5	15.0	12.5	10.0	8.0	0.0	
MMP-3085	22.5	30	80	65														17.5	16.5	15.0	12.5	11.0	8.0	0.0
MMP-3068	22.5	30	100	80										27.0	25.5	24.0	21.0	17.0	9.5					

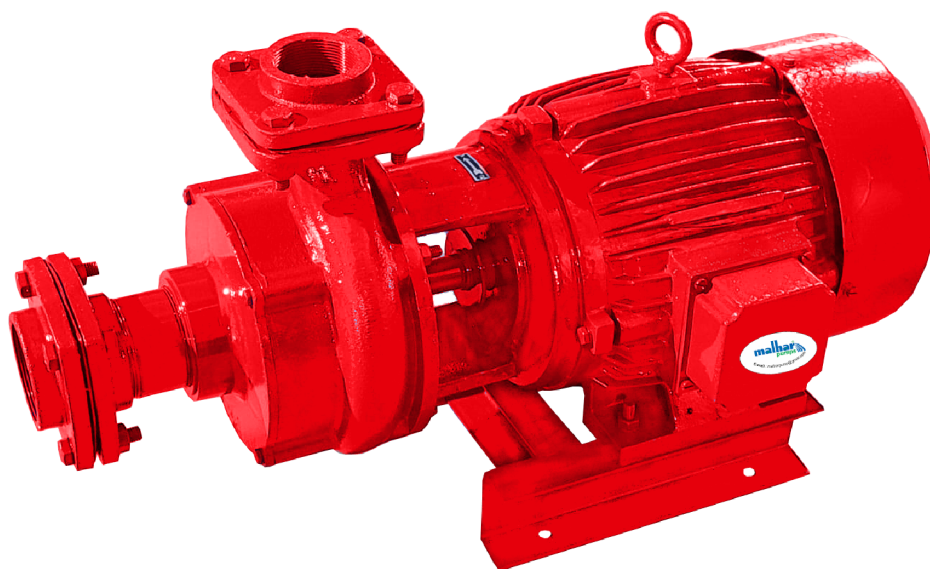

MMP-868-2 STAGE MONOBLOCK PUMP



"MMP" SERIES



CENTRIFUGAL BARE PUMP



**CENTRIFUGAL
MONOBLOCK PUMP**



**CENTRIFUGAL
BARE PUMP WITH FLP MOTOR**



**CENTRIFUGAL
MONOBLOCK FLP PUMP**



**CENTRIFUGAL
FLP FLANGE MOUTED
MONOBLOCK PUMP**



**CENTRIFUGAL FIRE FIGHTING
MONOBLOCK PUMP**



**CENTRIFUGAL FIRE FIGHTING
COUPLED PUMP WITH CANOPY**



**CENTRIFUGAL
MONOBLOCK FLP PUMP WITH
BASE FRAME & TROLLEY**