




FLOW SCOPE (ELECTRONIC)

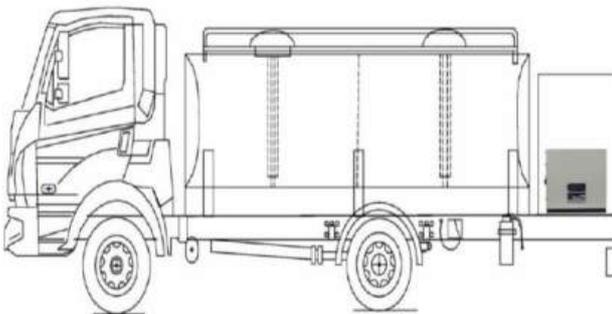

FEATURES

ACCURACY: $\pm 0.1\%$ (OUTPUT VOLUME > 99.9% OF INPUT VOLUME) .

POSITIVE DISPLACEMENT METER .

REPEATABILITY 100% .

FLOW RATE : 5 TO 60 LPM .

ELECTRONIC REGISTER UNIT WITH 6 DIGIT LCD DISPLAY .

THERE IS AN INBUILT PRINTER BY WHICH ONE CAN PRINT THE BILL AFTER EACH DELIVERY .

THE RATE OF THE FUEL CAN BE SET VERY EASILY WITH THE HELP OF THE KEYPAD .


THE CLOCK CAN BE SET IN 24H FORMAT WITH THE HELP OF THE KEYPAD .

THE COMPANY NAME , ADDRESS , CONTACT NUMBER, EMPLOYEE ID, NOZZLE ID ,FUEL TYPE , DENSITY OF THE FUEL CAN BE SET WITH HELP OF KEY PAD WHICH CAN BE PRINTED ON THE BILL .

MEASURES, MONITORS THE EXACT VOLUME OF LIQUID SPECIALLY PETROLEUM PRODUCTS LIKE LDO , HSD , KEROSENE ,FURNACE OIL , BIO DIESEL ETC. FUNCTIONS EQUALLY IN STATIC OR MOBILE CONDITIONS IN URBAN , SUBURBAN & RURAL AREAS .



VOLUMETRIC FLOW METER (ANALOG)

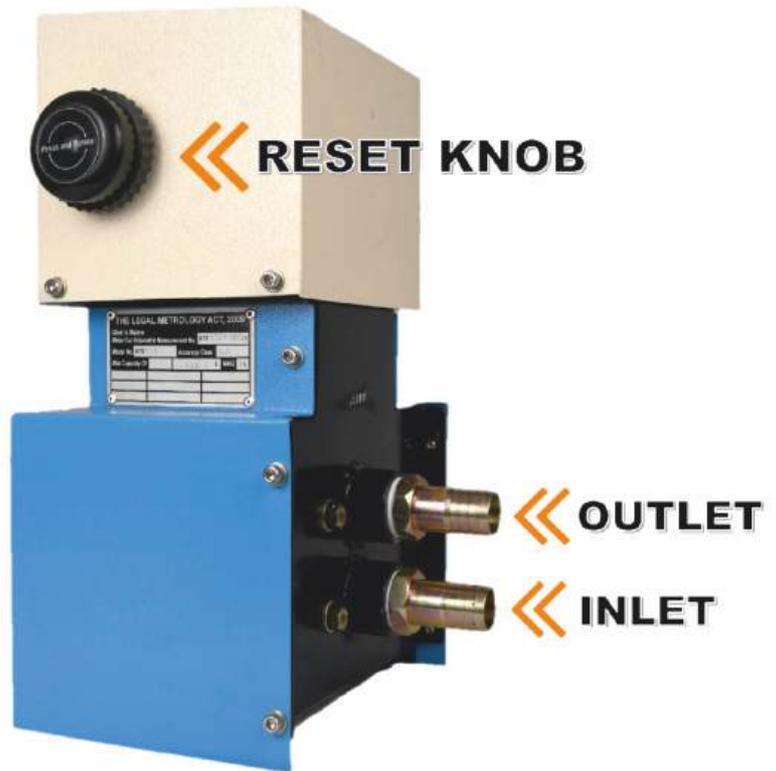

FEATURES

POSITIVE DISPLACEMENT METER

- ACCURACY : $\pm 0.1\%$
 - FLOW RATE : UP TO 90 LPM
 - REPEATABILITY : 100%
 - TOTALIZER : 8 DIGIT (99,99,999.9 NON REVERSIBLE)
- EASY INSTALLATION & MAINTENANCE
- PREVENT WASTAGE TO HIGH EXTENT
 - EASY FOR FIELD CALIBRATION
 - WORKABLE FOR LONG TIME
 - FUNCTIONS IN STATIC OR MOBILE CONDITIONS
 - CAN REACH CUSTOMERS DOOR STEPS

