TOPTUL CORDLESS TOOLS PRICE LIST

W. E. F 01-05-2018

List No. 22 / AA



LIST PRICE



LIST PRICE 44175





· Easy for carry in any pants pocket

· Installed Li-ion battery

Standard Micro USB for easy to recharge battery by using mobile phone's charger
Includes: 5 pcs power screwdriver bits, Micro USB charging cord



Contents	Q'TY
Cordless Screwdriver	1
Power Screwdriver Bit Set (\$\bigsep\$ 1.0x6.0mm, \$\O 3 & 4mm, \$\bigsep\$ PH1 & PH2)	1
Micro USB/USB cord	1



ITEM NO. K	KPDB0803		
SPECIFICATIONS	🚱 10 飴 20		
Max. Torque	3 Nm		
Free Speed	0-350 RPM		
Power	Battery Rechargeable Li-ion Battery Voltage		
	3.6V 1.25Ah		
Charging time	1.5 Hour		
Charging Temperature	0°C - 40°C		
Operation Temperature	0°C - 40°C		
Storage Temperature	-20°C - 60°C		
Overall Length	110 mm		
Net Weight	325g		

LIST PRICE



Net Weight

3.96 lbs / 1.8 kgs (with battery)

BLOW CASE: W400 x D320 x H100 (mm)



Rivet Material	Nozzle Size			
	3.2 (1/8")	4.0 (5/32")	4.8 (3/16")	6.4 (1/4")
Aluminum	•	•	•	•
Metal	•	•	•	
SS with Metal Mandrel	•			
Stainless Steel	•			

and the second s	PRA0306	Types of Plug Adapter		
SPECIFICATIONS	田 3	(power charger)		
Rivet Diameter	3.2, 4.0, 4.8, 6.4 mm / 1/8", 5/32", 3/16", 1/4"	A. E. Z.		
Stroke	26 mm (max.)	11 00 (1)		
Free Speed	0-240 / 370 / 720 / 1120 RPM			
Speed Selector	4	(US) (EU) (AU/NZ		
Traction Power	8200 N	U. J.		
Power	Battery Rechargeable Li-ion Battery 18V 4.0Ah			
	Power Supply AC 100 - 240V / 50 - 60Hz	(UK) (JP)		
	Power Consumption DC 21V 3.0A			
	Type: JP			
	Battery Rechargeable Li-ion Battery 18V 3.0Ah			
	Power Supply AC 100 - 240V / 50 - 60Hz			
	Power Consumption DC 21V 2.3A			
Charging Time	1-1.5 Hour			
Charging Temperature	0°C - 40°C			
Operation Temperature	0°C - 40°C			
Storage Temperature	-20°C - 60°C	- 60°C		
Overall Length	12-3/16" / 310 mm			
Net Weight	4.37lbs / 1.99kgs (with battery)			
	BLOW CASE: W400	0 x D320 x H100 (mm		

LIST PRICE




KPBA0840E

ITEM NO.			
SPECIFICATIONS			
Max. For. Torque	2213 in-lb / 250 Nm		
Max. Rev. Torque	3540 in-lb / 400 Nm		
Free Speed	0-3000 RPM		
	Battery Rechargeable Li-ion Battery 18V 4.0Ah		
	Power Supply AC 100 - 240V / 50 60Hz		
	Power Consumption DC 21V 3.0A		
_	Type: JP		
Power	Battery Rechargeable Li-ion Battery 18V 4.0Ah		
	Power Supply AC 100 - 240V / 50 - 60Hz		
	Power Consumption DC 21V 2.3A		
Charging Time	1-2 Hour		
Charging Temperature	0°C - 40°C		
Operation Temperature	0°C - 40°C		
Storage Temperature	-20°C - 40°C		
Overall Length	7-1/16" / 180mm		
Net Weight	3.56 lbs / 1.62 kgs (with battery)		

LIST PRICE



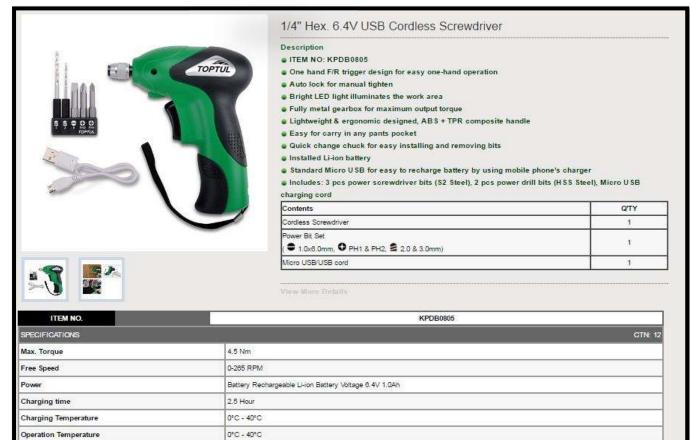

KPDB0805 5050

-20°C - 60°C

128 mm

380g

Storage Temperature

Overall Length

Net Weight