

Remote O.T. Table

FEATURES

- Radio Luscetn top for X-ray and C-Arm image intensifier compatibility.
- All operation possible by wired remote control.
- Head high/low, Trendlenburg / Reverse Trendlenburg, Lateral Tilt, Flex/Reflex, Chair Positions are possible.
- The Head and the leg section are detachable.
- German Actuators are used to achieve all the different movements.
- The table base is eccentric to meet the C-Arm movements.

SPECIFICATIONS

- | | |
|------------------------------------|----------------------|
| • Table Top | • 535mm x1900mm |
| • Base Break | • 90degree |
| • Trendlenburg Position | • 45degree + 5degree |
| • Leg section down | • 90degree |
| • Table Top elevation | • 700mm x 1000mm |
| • Lateral Tilt Right/Left Position | • +20degree |
| • Head section up/down | • 90degree |
| • Power supply | • 230V 50Hz |



SM-1101

ACCESSORIES

Anaesthetic Screen frame, Anaesthetic Rubber Mattress, Stainless Steel arm board, support padded, Padded Lateral Support & Knee Crutches, Hand Surgery Attachments (radioluscent arm board)

OPTIONAL ACCESSORIES

Perinial support, interlock femur nail fixation arrangement, Traction kit, Spine frame, Neurosurgery attachment.

Hydraulic Table



FEATURES

- Hydraulic and Mechanical Operated.
- The base is eccentric for trouble-free C-Arm movements.
- Leg & Head section are interchangeable
- Eccentric pillars, Stainless fitting.
- Detachable head, leg and pelvic section.
- Inbuilt kidney bridge.
- Five sectional radio-translucent.
- Base and cover made of attractive, easy to clean stainless steel.
- Sophisticated mechanics provide smooth, stepless articulation of the table top for precise patient positioning.

SPECIFICATIONS

- Table Top : 48.5 cm x 180 cm
- Elevation : 70cm - 100cm
- Lateral tilt : Each 30 degree
- Trendleburg : Each 30 degree
- Back Break : 90 degree up.
- Weight : 250 kg.



SM-1102

Motorized Table - with ortho attachment


FEATURES

- Radio Luscant top for X-Ray and C-Arm image intensifier compatibility.
- All operation possible by wired remote control.
- Head high/low, Trendlenburg/Reverse Trendlenburg, Lateral Tilt, Flex/Reflex, Chair Positions are possible.
- The Head and the Leg section are detachable.
- German Actuators are used to achieve all the different movements.
- The table base is eccentric to meet the C-Arm movements.



SM-1103

Albee Type Ortho Attachment

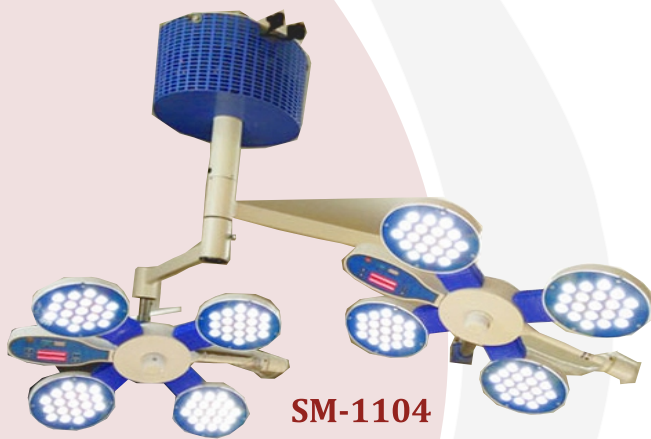

SM-1104

Twin Model for Reflected LED O. T. Light

Technical Specification

Lux Power Intensity : 1,40,000 + 2
 Color Rendering Index : 95
 Number of led : 48 + 48
 Depath Lumination : 10 - 25mm
 Colour Temp. : 3500-5200K
 Dimming : 10%-100%
 LED Average Life : >50000Hrs
 Power Supply : 110V/220 Drive by 24 volt
 Focusing : Adjustable By Handle



SM-1105

Round Dome LED Light

Technical Specification

Lux Power Intensity : 1,60,000 + 2
 Color Rendering Index : 95
 Number of led : 48 + 48
 Depath Lumination : 10 - 25mm
 Colour Temp. : 3500-5200K
 Dimming : 10%-100%
 LED Average Life : >50000Hrs
 Power Supply : 110V/220 Drive by 24 volt
 Focusing : Adjustable By Handle



SM-1106

Twin Model Seven Reflected LED O. T. Light

Technical Specification



Intensity : 2,25,000 + 2
 Spot Diameter : 100-150mm
 Depth Diameter : 3800-4800K
 Colour Temp : 93 Ra
 Colour Rendering Index : Manual
 Focusing : >50000Hrs
 LED Average Life : 84
 Number of LEDs : 749 mm (each)
 Diameter of Light : 10-100 Digital Touch
 Intensity Control : 220V/50Hz AC
 Power Consumption : 80 Watt
 Special Function : Dual Memory Function



SM-1107

Four Reflected LED O. T. Light

Technical Specification

Lux Power Intensity
 Color Rendering Index
 Number of led
 Depath Lumination
 Colour Temp.
 Dimming
 LED Average Life
 Power Supply
 Focusing



Round Dome 19 LED O.T. Light

Technical Data Model No :

Light Intensity at 1 meter(LUX) : 60,000 LUX
 No. of Leds : 19 Nos
 Dome Dia : 14
 Colour Temp : 4800° K
 Light Field Diameter : 100mm
 Control on Dome : Digital

SM-1108



SM-1109

Round Dome 15 LED O.T. Light

Technical Data Model No :

Light Intensity at 1 meter (LUX) : 50,000 LUX
 No. of Leds : 15 nos
 Dome Dia : 14"
 Colour Temp : 4800° K
 Light Field Diameter : 100mm
 Control on Dome : Digital

All Light for Ceiling Mounting, Wall Mounting, Mobile etc...



**Semi Automatic Double Drum
Autoclave Machine
SM-1115**



**Cylindrical on Stand
SM-1116**



**Rectangular on Stand
SM-1117**



**Fully Automatic PLC Based ETO Sterilizer
SM-1118**



**Cylindrical
Vertical Autoclave
SM-11120**



**UltraSonic Washer
SM-1119**

Sai Mediquip®

Factory : 11/B Laxmi Estate, Marol Naka, Andheri (E) Mumbai - 400 059.

Mob.: +91 9821108450 / +91 98202 30173 • **Email :** saimedi@ymail.com / saimediquip@gmail.com