

ELECTRO
Energizing nation with power



ISI MARKED



MS CERT

JAS-ANZ



ISO 9001:2015
CERTIFIED

ISO 9001 : 2015

ELECTRO POLES PRODUCTS PVT. LTD.

AN ISO 9001 & BIS CERTIFIED COMPANY

Overall Height 7.0MTR Height Above ground 5.75MTR Planting Depth 1.25MTR	Bottom	Middle	Top	Wt. Kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
	4000mm	1500mm	1500mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm				
410-SP-01	114.3 X 3.65	88.9 X 3.25	76.1 X 3.25	62	127	80
410-SP-02	114.3 X 4.50	88.9 X 4.05	76.1 X 3.25	73	154	96
410-SP-03	114.3 X 5.40	88.9 X 4.85	76.1 X 3.25	85	180	111


Overall Height 7.5MTR Height Above ground 6.25MTR Planting Depth 1.25MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
	4500mm	1500mm	1500mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm				
410-SP-04	114.3 X 3.65	88.9 X 3.25	76.1 X 3.25	67	117	64
410-SP-05	114.3 X 4.50	88.9 X 4.05	76.1 X 3.25	79	137	76
410-SP-06	114.3 X 5.40	88.9 X 4.85	76.1 X 3.25	93	165	89
410-SP-07	139.7 X 4.50	114.3 X 3.65	88.9 X 3.25	97	215	143
410-SP-08	139.7 X 4.85	114.3 X 3.65	88.9 X 3.25	103	229	151
410-SP-09	139.7 X 5.40	114.3 X 3.65	88.9 X 3.25	110	253	163

Overall Height 8.0MTR Height Above ground 6.50MTR Planting Depth 1.50MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
	4500mm	1750mm	1750mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm				
410-SP-10	114.3 X 3.65	88.9 X 3.25	76.1 X 3.25	70	112	53
410-SP-11	114.3 X 4.50	88.9 X 4.05	76.1 X 3.25	83	135	63
410-SP-12	114.3 X 5.40	88.9 X 4.85	76.1 X 3.25	97	158	74
410-SP-13	139.7 X 4.50	114.3 X 3.65	88.9 X 3.25	101	206	120
410-SP-14	139.7 X 4.85	114.3 X 4.50	88.9 X 3.25	111	220	131
410-SP-15	139.7 X 5.40	114.3 X 4.50	88.9 X 3.25	119	243	140

Overall Height 8.5MTR Height Above ground 7.00MTR Planting Depth 1.50MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
	5000mm	1750mm	1750mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm				
410-SP-16	114.3 X 3.65	88.9 X 3.25	76.1 X 3.25	75	104	44
410-SP-17	114.3 X 4.50	88.9 X 4.05	76.1 X 3.25	89	125	52
410-SP-18	114.3 X 5.40	88.9 X 4.85	76.1 X 3.25	104	146	61
410-SP-19	139.7 X 4.50	114.3 X 3.65	88.9 X 3.25	109	191	98
410-SP-20	139.7 X 4.85	114.3 X 3.65	88.9 X 3.25	115	204	103
410-SP-21	139.7 X 5.40	114.3 X 4.50	88.9 X 3.25	129	225	115
410-SP-22	165.1 X 4.50	139.7 X 4.50	114.3 X 3.65	141	270	176
410-SP-23	165.1 X 4.85	139.7 X 4.50	114.3 X 3.65	148	290	186
410-SP-24	165.1 X 5.40	139.7 X 4.50	114.3 X 3.65	158	320	201

Overall Height 9.0MTR Height Above ground 7.50MTR Planting Depth 1.50MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
	5000mm	2000mm	2000mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm				
410-SP-25	114.3 X 3.65	88.9 X 3.25	76.1 X 3.25	78	96	34
410-SP-26	114.3 X 4.50	88.9 X 4.05	76.1 X 3.25	92	116	41
410-SP-27	114.3 X 5.40	88.9 X 4.85	76.1 X 3.25	108	136	47
410-SP-28	139.7 X 4.50	114.3 X 3.65	88.9 X 3.25	113	177	76
410-SP-29	139.7 X 4.85	114.3 X 4.50	88.9 X 3.25	125	190	83
410-SP-30	139.7 X 5.40	114.3 X 4.50	88.9 X 3.25	133	209	90
410-SP-31	165.1 X 4.50	139.7 X 4.50	114.3 X 3.65	147	251	139
410-SP-32	165.1 X 4.85	139.7 X 4.50	114.3 X 3.65	154	269	146
410-SP-33	165.1 X 5.40	139.7 X 4.50	114.3 X 3.65	164	297	157

Overall Height 9.5MTR Height Above ground 7.70MTR Planting Depth 1.80MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm (Kg)	Load for Temporary Deflection of 157.5 mm (Kg)
	Section Height					
	H3	H2	H1			
	5000mm	2250mm	2250mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm				
410-SP-34	139.7 X 4.50	114.3 X 4.50	88.9 X 3.25	122	180	76
410-SP-35	139.7 X 4.85	114.3 X 4.50	88.9 X 3.25	129	192	80
410-SP-36	139.7 X 5.40	114.3 X 4.50	88.9 X 3.25	137	212	85
410-SP-37	165.1 X 4.50	139.7 X 4.50	114.3 X 3.65	153	255	133
410-SP-38	165.1 X 4.85	139.7 X 4.50	114.3 X 3.65	160	273	140
410-SP-39	165.1 X 5.40	139.7 X 4.50	114.3 X 3.65	170	302	151

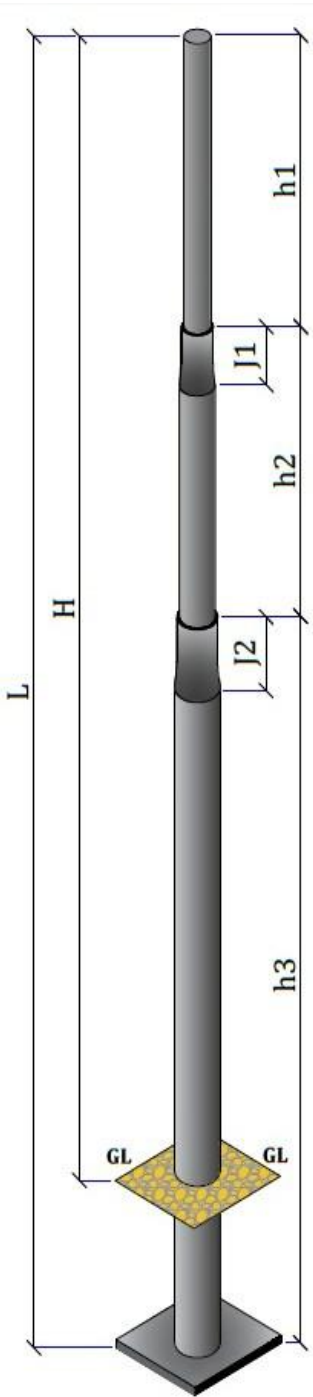

Overall Height 10.0MTR Height Above ground 8.20MTR Planting Depth 1.80MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm	Load for Temporary Deflection of 157.5 mm
	Section Height					
	H3	H2	H1			
	5200mm	2400mm	2400mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm	(Kg)	(Kg)		
410-SP-40	139.7 X 4.50	114.3 X 4.50	88.9 X 3.25	128	168	62
410-SP-41	139.7 X 4.85	114.3 X 4.50	88.9 X 3.25	135	180	65
410-SP-42	139.7 X 5.40	114.3 X 4.50	88.9 X 3.25	144	198	69
410-SP-43	165.1 X 4.50	139.7 X 4.50	114.3 X 3.65	160	238	108
410-SP-44	165.1 X 4.85	139.7 X 4.50	114.3 X 3.65	168	255	114
410-SP-45	165.1 X 5.40	139.7 X 4.50	114.3 X 3.65	178	282	122
410-SP-46	193.7 X 4.85	165.1 X 4.50	139.7 X 4.50	208	357	189
410-SP-47	193.7 X 5.40	165.1 X 4.50	139.7 X 4.50	221	392	203
410-SP-48	193.7 X 5.90	165.1 X 4.50	139.7 X 4.50	233	427	215


Overall Height 11.0MTR Height Above ground 9.20MTR Planting Depth 1.80MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm	Load for Temporary Deflection of 157.5 mm
	Section Height					
	H3	H2	H1			
	5600mm	2700mm	2700mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm	(Kg)	(Kg)		
410-SP-49	139.7 X 4.50	114.3 X 4.50	88.9 X 3.25	140	149	42
410-SP-50	139.7 X 4.85	114.3 X 4.50	88.9 X 3.25	147	159	44
410-SP-51	139.7 X 5.40	114.3 X 5.40	88.9 X 3.25	164	175	49
410-SP-52	165.1 X 4.50	139.7 X 4.50	114.3 X 3.65	175	210	74
410-SP-53	165.1 X 4.85	139.7 X 4.50	114.3 X 3.65	183	226	78
410-SP-54	165.1 X 5.40	139.7 X 4.50	114.3 X 3.65	194	249	83
410-SP-55	193.7 X 4.85	165.1 X 4.50	139.7 X 4.50	227	316	130
410-SP-56	193.7 X 5.40	165.1 X 4.50	139.7 X 4.50	241	347	140
410-SP-57	193.7 X 5.90	165.1 X 4.85	139.7 X 4.50	256	378	150

Overall Height 12.0MTR Height Above ground 10.0MTR Planting Depth 2.0MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm	Load for Temporary Deflection of 157.5 mm
	Section Height					
	H3	H2	H1			
	5800mm	3100mm	3100mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm	(Kg)	(Kg)		
410-SP-58	165.1 X 4.50	139.7 X 4.50	114.3 X 3.65	186	192	55
410-SP-59	165.1 X 4.85	139.7 X 4.50	114.3 X 3.65	197	206	58
410-SP-60	165.1 X 5.40	139.7 X 4.50	114.3 X 3.65	208	228	61
410-SP-61	193.7 X 4.85	165.1 X 4.50	139.7 X 4.50	245	289	97
410-SP-62	193.7 X 5.40	165.1 X 4.50	139.7 X 4.50	259	317	103
410-SP-63	193.7 X 5.90	165.1 X 4.85	139.7 X 4.50	277	345	111
410-SP-64	219.1 X 4.85	193.7 X 4.85	165.1 X 4.50	292	371	149
410-SP-65	219.1 X 5.60	193.7 X 4.85	165.1 X 4.50	313	423	164
410-SP-66	219.1 X 5.90	193.7 X 4.85	165.1 X 4.50	322	445	169

Overall Height 13.0MTR Height Above ground 11.0MTR Planting Depth 2.0MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm	Load for Temporary Deflection of 157.5 mm
	Section Height					
	H3	H2	H1			
	5800mm	3600mm	3600mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm	(Kg)	(Kg)		
410-SP-67	193.7 X 4.85	165.1 X 4.50	139.7 X 4.50	261	261	69
410-SP-68	193.7 X 5.40	165.1 X 4.85	139.7 X 4.50	281	287	75
410-SP-69	193.7 X 5.90	165.1 X 5.40	139.7 X 4.50	302	321	81
410-SP-70	219.1 X 4.85	193.7 X 4.85	165.1 X 4.50	312	336	108
410-SP-71	219.1 X 5.60	193.7 X 4.85	165.1 X 4.50	333	382	118
410-SP-72	219.1 X 5.90	193.7 X 4.85	165.1 X 4.50	343	402	121

Overall Height 14.5MTR Height Above ground 12.50MTR Planting Depth 2.0MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm	Load for Temporary Deflection of 157.5 mm
	Section Height					
	H3	H2	H1			
	6500mm	4000mm	4000mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm	(Kg)	(Kg)		
410-SP-73	193.7 X 5.40	165.1 X 4.85	139.7 X 4.50	312	250	51
410-SP-74	193.7 X 5.90	165.1 X 5.40	139.7 X 4.50	336	273	55
410-SP-75	219.1 X 5.60	193.7 X 4.85	165.1 X 4.50	370	334	79
410-SP-76	219.1 X 5.90	193.7 X 4.85	165.1 X 4.50	380	352	81

Overall Height 16.0MTR Height Above ground 13.70MTR Planting Depth 2.30MTR	Bottom	Middle	Top	Wt. kg	Load for Permanent Set not Exceeding 13 mm	Load for Temporary Deflection of 157.5 mm
	Section Height					
	H3	H2	H1			
	7000mm	4500mm	4500mm			
	Outside Diameter / Section Thickness					
H3 mm	H2 mm	H1 mm	(Kg)	(Kg)		
410-SP-77	193.7 X 5.40	165.1 X 4.85	139.7 X 4.50	341	227	37
410-SP-78	193.7 X 5.90	165.1 X 5.40	139.7 X 4.50	367	248	40
410-SP-79	219.1 X 5.60	193.7 X 4.85	165.1 X 4.50	405	304	58
410-SP-80	219.1 X 5.90	193.7 X 4.85	165.1 X 4.50	416	319	60

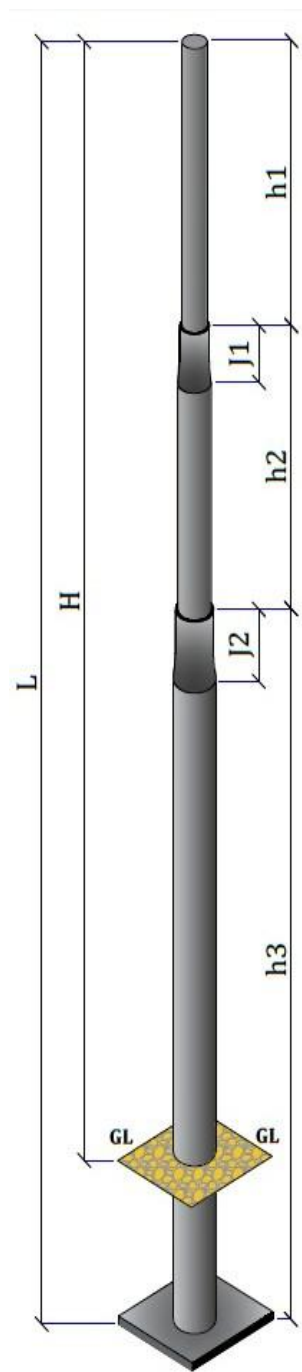

- Electro Poles Products Pvt. Ltd.(EPPPL) was incorporated in the year 2007. We are basically ISO 9001:2008 Certified company & our factory is based in Dankuni, Dist-Hooghly near Mother Dairy Gate No 3 (Blue Heaven Hotel) based in Eastern India. We have professional & experience workers working with us since inception of the company. Our factory is mostly modernised & we have state of art equipments & machineries for execution of the products. We also have a highly quality control procedure within the factory.
- You can depend on EPPPL's high quality Galvanized Steel poles for an appealing solution to your roadways & Street lighting needs. Refer overleaf for the range and specifications. We offer Swaged type Steel Tubular poles as per 410-SP-MPA & various types of brackets and accessories. EPPPL can offer M.S. Painted, Galvanized & Powder coated poles also to the Indian market for better finish & aesthetics.
- Meeting the needs of you , our customer is top priority no matter how large or small your order whether its a standard product or specifically designed to meet your requirements our focus is to provide a quality product on time and per agreed standards.
- We are reliable partner for your lighting needs.



List of Our manufacturing & suppling items :-

- M.S / G . I. Steel Tabular Poles Swaged Type used for Street Lighting, LT & HT Power Transmission, Flood lighting.
- Octagonal Poles & High Mast Poles.
- Hamilton Poles/ Revitted Poles and their accessories used for Telecom Transmission.
- Tower for Power Distribution/ Transmission.
- ERW M.S. Black & G.I. Pipe used for structural, water gas, steam, drainage.
- M.S./G.I. Cable Tray (Ladder/ Perforated Type)
- Earth Electrode & Earthing Pipe/Strip



Reg. Office:1-B, Ramlochan Mullick Street ,1st Floor, Room No. 105, Kolkata - 700073,
Marketing Office:Eco Suite Tower, Plot II - D/22, Action Area II, 6th Floor ,Suite No : 607,
(Near City Centre II) , Kolkata - 700156, West Bengal, India .

Work Unit 1 : Mother Dairy Gate No.3, P.O. Dankuni Coal Complex , Dankuni, Hooghly.
Work Unit 2 : Santra para , village : Khariyal , P.O. Dankuni Coal Complex , Dankuni , Hooghly.

Work Unit 3 : NH2, Pardankuni, Dankuni, Hooghly.

Trade Enquiry No : +91-9874245900 / 9903915900

Email : info@electrogroups.com

Web : www.electrosteelproducts.com

Mr. Ujjal Saha (Sales & Marketing) , Ph: +91-9874245530