




AMERICAN BASSWOOD

600 X 600 MM | GVT

MATT



ASH WOOD

600 X 600 MM | GVT


MATT



INDIAN ROSEWOOD

600 X 600 MM | GVT




MATT



MISTY BEIGE

600 X 600 MM | GVT





MATT



MISTY GREY

600 X 600 MM | GVT



MATT



OAK WOOD BEIGE

600 X 600 MM | GVT

MATT



OAK WOOD BRAWN

600 X 600 MM | GVT






MATT



SANDSTONE CREMA

600 X 600 MM | GVT





MATT

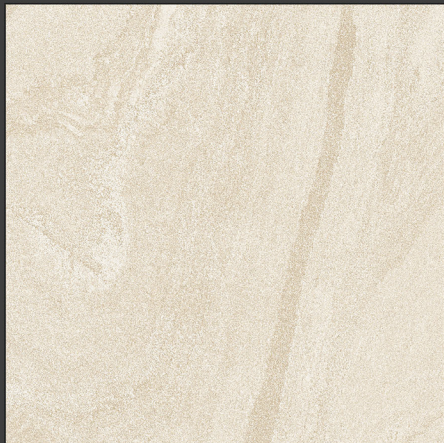

STONE BEIGE

600 X 600 MM | GVT


MATT



TEAKWOOD NATURAL

600 X 600 MM | GVT





MATT



TIMBER WOOD

600 X 600 MM | GVT



MATT























WALNUT CHERRY

600 X 600 MM | GVT

MATT



TECHNICAL SPECIFICATION

TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 B1a TILES	VALUE
 Length and width	BS EN ISO 10545-2	± 0.6%	± 0.3%
 Thickness	BS EN ISO 10545-2	± 5.0%	± 3.0%
 Straightness of sides	BS EN ISO 10545-2	± 0.5%	± 0.3%
 Rectangularity	BS EN ISO 10545-2	± 0.6%	± 0.3%
 Surface flatness	BS EN ISO 10545-2	± 0.5%	± 0.3%
 Water absorption	BS EN ISO 10545-3	≤ 0.5%	< 0.05%
 Breaking strength	BS EN ISO 10545-4	≥ 1300N	≥ 1500N
 Modulus of rupture	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 45 N/mm ²
 Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm ³	≤ 150mm ³
 Linear thermal expansion	BS EN ISO 10545-8	≤ 9 x 10 ⁻⁴ °C	≤ 7 x 10 ⁻⁴ °C
 Thermal shock resistance	BS EN ISO 10545-9	No visible defect	No visible defect
 Frost resistance	BS EN ISO 10545-12	Frost proof	Frost proof
 Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
 Resistance to stains	BS EN ISO 10545-14	Manufacturer to state class	Stains removed Min. Class 2
 Colour resistance	BS EN ISO 10545-16	No damage	No damage
 Colour resistance to UV Light	DIN 51094	No change in color	No change in color
 Scratch hardness (MOHS Scale)	EN 181	≥ 6 MOHS	≥ 7 MOHS
 Surface quality	BS EN ISO 10545-2	Min. 95%	No visible defect
 Skid resistance (Traction coefficient)	BS EN ISO 10545-17	> 0.4	> 0.4
 Moisture Expansion	-	Nil	Nil

Note: * Colour shown in this catalogue may vary with the original tile. * Slight shade & size variation is an inherent property of ceramic / vitrified tiles.

Packing details

SIZE	NO. OF TILES	COVERAGE AREA
600 x 600 mm	4 Pcs. per Box	1.44 sq mtr. (Approx.)

- A beautiful floor is considered by many as the most vital element of construction. It's what any visitor sees first. And most importantly, once laid, a floor is seldom changed.
- It must therefore not only be beautiful but also retain it's beauty for years to come, but floors are subject to daily grind and rigorous of foot traffic and to stains, ink stains, grease stains, etc. even the best of tiles will stain if not maintained. Fortunately the situation is not completely futile.

Polished Vitrified Tiles High Strength Joint free

