



### **DOUBLE CHARGE**

800mmx800mm

















### ELEGANCE















#### **ELEGANCE** SERIES





Elegance Dove





















Elegance Crema















# ROOK




















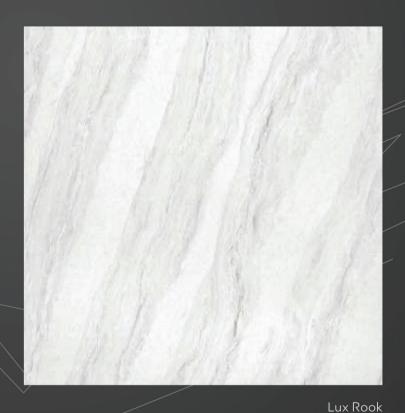























Soft Rook















#### **ROOK** SERIES





Cherry Rook


















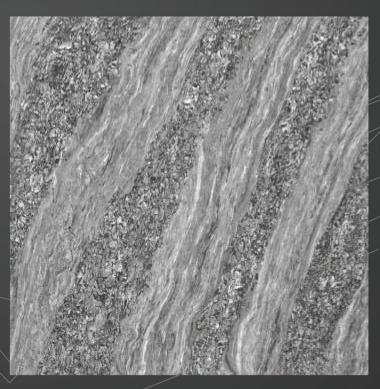

Smoky Rook


















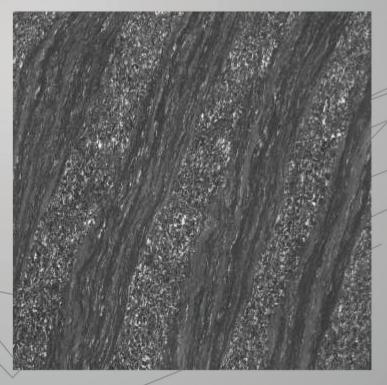

























































Channel White



















Channel Crema
















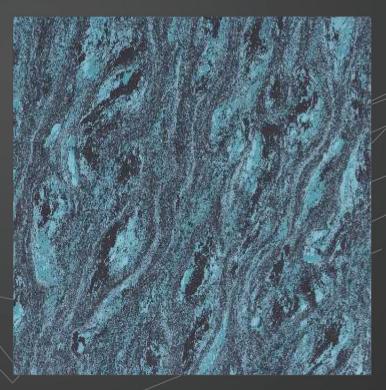

Channel Navy

















Channel Brown



















# THAR SERIES





















Russet Thar




















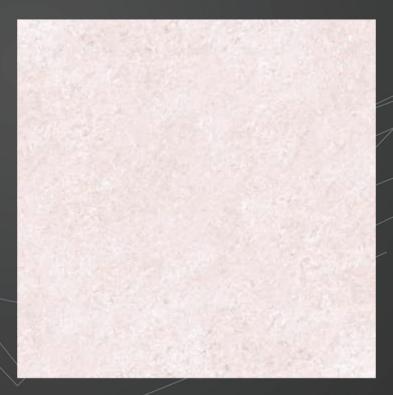

Pine Thar





















Creama Thar













































Golden Thar



















Cherry Thar





























































Graphite Thar

















### BEATLES




















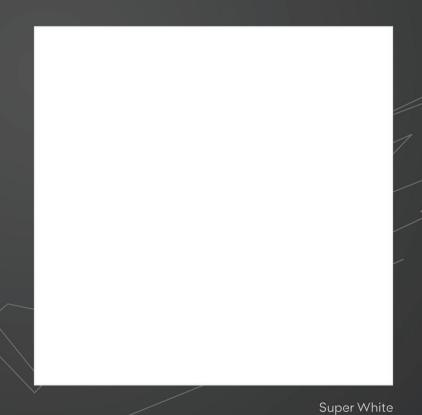



















Swan White













### TECHNICAL SPECIFICATION

CHARACTERISTIC					
DIMENSION & SURFACE QUALITY	INTERNATIONAL SPECIFICATIONS ISO 13006/EN 176 GRO	HAWK VALUE	METHOD OF TESTIN		
Deviation In Length & Width	± 0.6%	± 0.1%	ISO 10545 Pt2		
Deviation In Thickness	<u>+</u> 5%	± 3%	ISO 10545 Pt2		
Straightness Of Sides	± 0.5%	± 0.1%	ISO 10545 Pt2		
Rectangularity	± 0.6%	± 0.2%	ISO 10545 Pt2		
>- Surface Flatness	± 0.5%	± 0.2%	ISO 10545 Pt2		
++ Glossiness	-	Min. 90% Reflection	Glossmeter		
PHYSICAL & THERMAL PROPERTIES					
Water Absorption	< 0.5%	< 0.05%	ISO 10545 Pt3		
✓ Mohs Hardness	>6	8	EN 101		
Flexural Strength (Mor)	> 35N/m²	> 46 N/mm²	ISO 10545 Pt4		
Surface Abrasion Resistance	As per Manufacturer State Class	III to V	ISO 10545 Pt7		
Skid Resistance	> 0.4	> 0.6	ISO 10545 Pt17		
Breaking Strength	1113 N	2800 N	ISO 10545 Pt4		
Density (g/cc)	> 2.0	> 2.4	ISO 10545 Pt3		
★ Frost Resistance	Frost Proof	Frost Proof	ISO 10545 Pt9		
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 Pt9		
→ Thermal Expansion	< 9 x 10 <sup>4</sup>	< 6 X 10 <sup>6</sup>	ISO 10545 Pt8		
	Nil	Nil	ISO 10545 Pt10		
CHEMICAL PROPERTIES					
25 Chemical Resistance	No Damage	No Damage	ISO 10545 Pt13		
Colour Resistance	No Damage	No Damage	DIN 51094		
Stain Resistance	Resistant	Resistant	ISO 10545 Pt14		

#### PACKING DETAILS

Sr.	Product Size	Pieces Per Box	Coverage Area Sq. Ft.	Coverage Area Sq. Mtr.
01	600X600MM	4	15.50	1.44
02	800X800MM	3	20.66	1.92
03	800X1200MM	2	20.66	1.92
04	1000X1000MM	2	21.52	2.00
05	600X600MM FULL BODY (20mm)	2	7.75	0.72
06	600X600MM FULL BODY (16mm)	2	7.75	0.72
07	600X600MM FULL BODY (10mm)	4	15.50	1.44



#### **APPLICATIONS**





























Note: Any staining material spills on the tile must be diluted with water immediately as it reduces the problem of staining on tile.

Note: Min. 4mm Spacer is Mandatory for 20mm & 16mm Thickness Tiles

DISCLAIMER: Hawk Granito reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications or aesthetic appearance of products contained in this catalogue at any time without any prior notice. The colors shown of products in this catalogue are purely illustrative and limited to printing process. Please refer actual product before final selection. The detail of sizes and color references should be verified for typographical errors.