









WHAT WE ARE

Shyam manufacturing quartz stone with its plant located at MORBI, Gujarat. India. Shyam Quartz Stone has the capacity to manufacture 13,000 SQMeter of quartz stone Per Month.

Quartz stone is an engineered stone used for a variety of applications in the building and construction industry, be it residential, non residential or Commercial. Quartz can be used either in existing buildings, homes, offices, etc. or in new construction projects instead of tiles or natural stones, to enhance durability, strength as well as minimize maintenance costs for the end users. Quartz stone essentially eliminates most of the innate deficiencies of natural granite stone as well as enables designs that are customized to the end user's choice.

Shyam has been setup with the highest level of quality and systemic controls that ensures consistent production with minimal wastage. Shyam will lead by example and aims to become the feather in the cap for the Indian engineered stone industry.



| SPRAKLE SERIES | 04 |
|----------------|----|
| ICE SERIES | 10 |
| HONEY SERIES | 13 |
| SANDY SERIES | 15 |
| FROST SERIES | 18 |
| PEARL SERIES | 19 |



The new Collection is inspired from the vision of thinking big. It is available in six different sizes, thickness and textures such as 3200x1600, 3200x800, 3075x1450, 3075x725 , 3200x825, which tilickness and textures such as Szova food, Szovasov, So/Sxi (35), 50/33/25, 32/00x825, winto can embellish and adorn living and work spaces all around you. Sophisticated, next-gen technology has been harnessed to create this kind of large size of pieces. This facilitates embellishment of different surfaces leading to seamlessly elegant spaces all around. It is a delight for interior designers and architects to deploy these quartz and create mesmerizing spaces.








































Special Order Size Available 300x300mm | 400x400mm | 300x600mm | 600x600mm





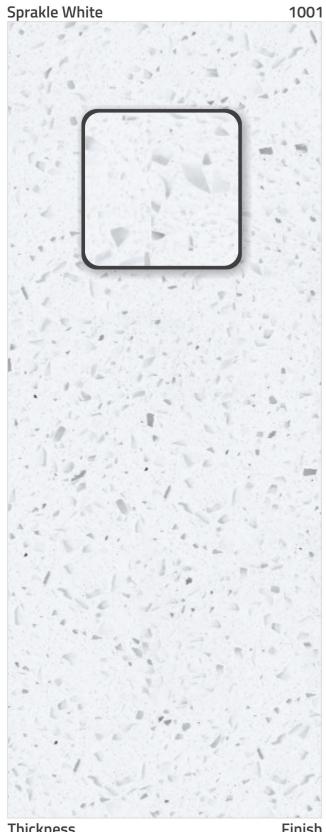

Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm



















SPRAKLE SERIES

Size 3200x1600mm | 3200x800mm | 3075x1450mm | 3075x725mm

Special Order Size Available 300x300mm | 400x400mm | 300x600mm | 600x600mm



1005




30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm





1004

Sprakle Dark Blue

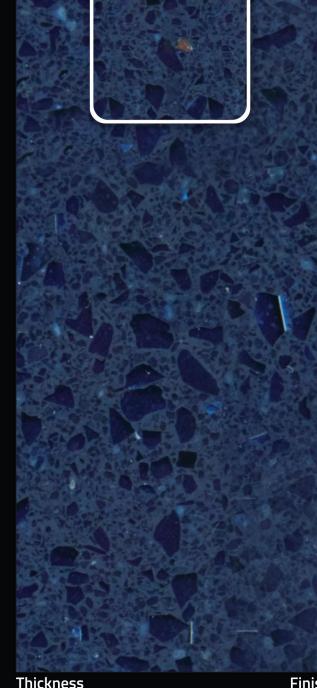

12mm | 10mm | 8mm

Finish Polished

Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm

Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm

























Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm

Finish Polished




















SPRAKLE SERIES



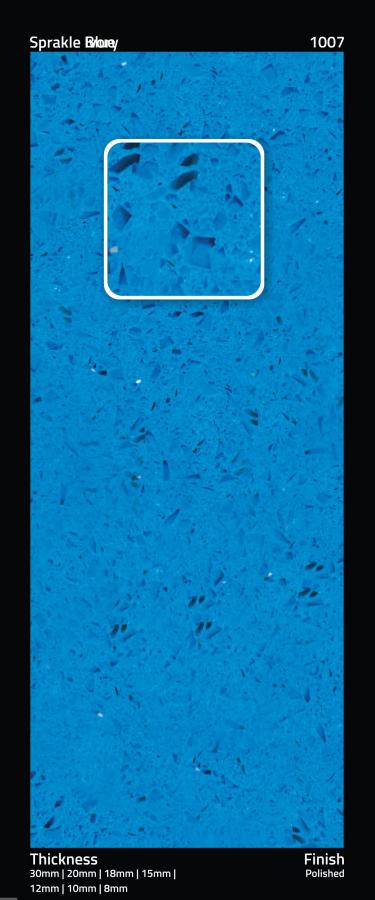

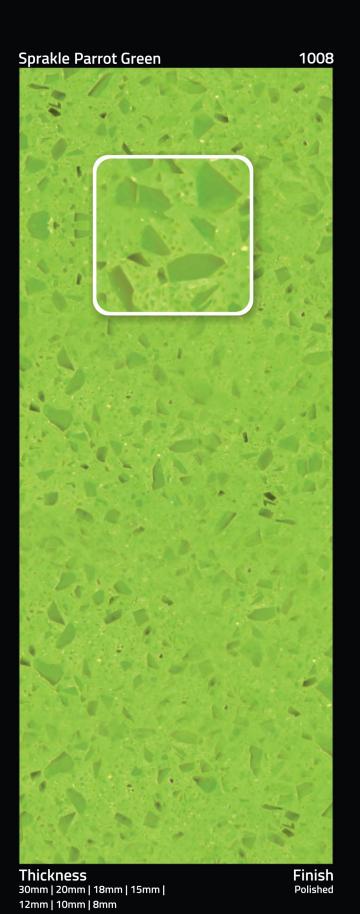

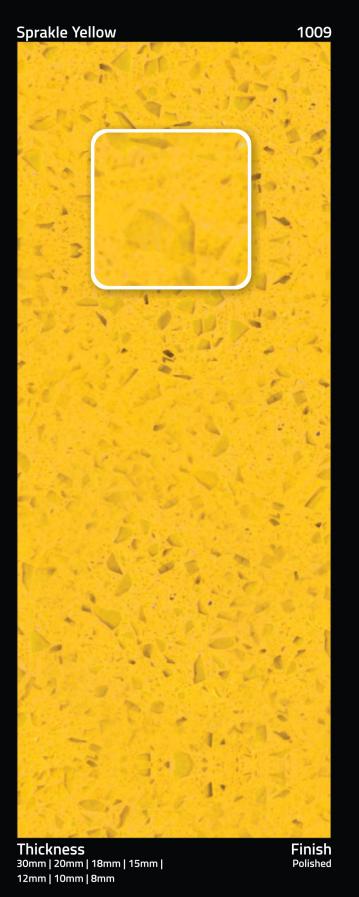




















SPRAKLE SERIES

Size 3200x1600mm | 3200x800mm | 3075x1450mm | 3075x725mm





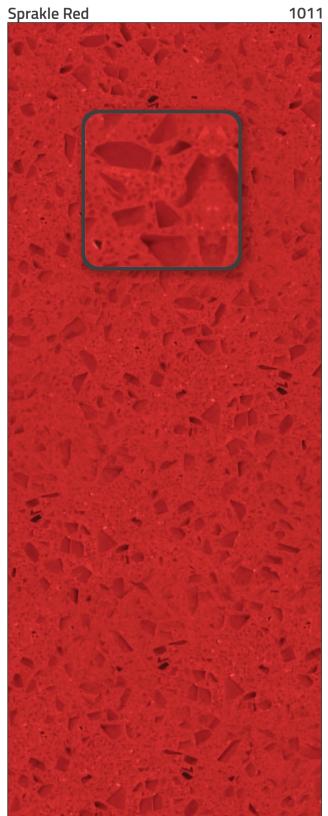

Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm

Finish Polished

















SPRAKLE SERIES

Size 3200x1600mm | 3200x800mm | 3075x1450mm | 3075x725mm

Special Order Size Available 300x300mm | 400x400mm | 300x600mm | 600x600mm

Sprakle Grey






Thickness 30mm | 20mm | 18mm | 15mm | Finish Polished 12mm | 10mm | 8mm



12mm | 10mm | 8mm

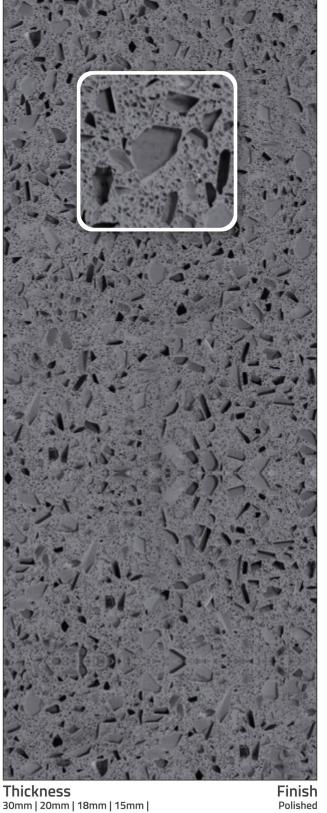

1014




















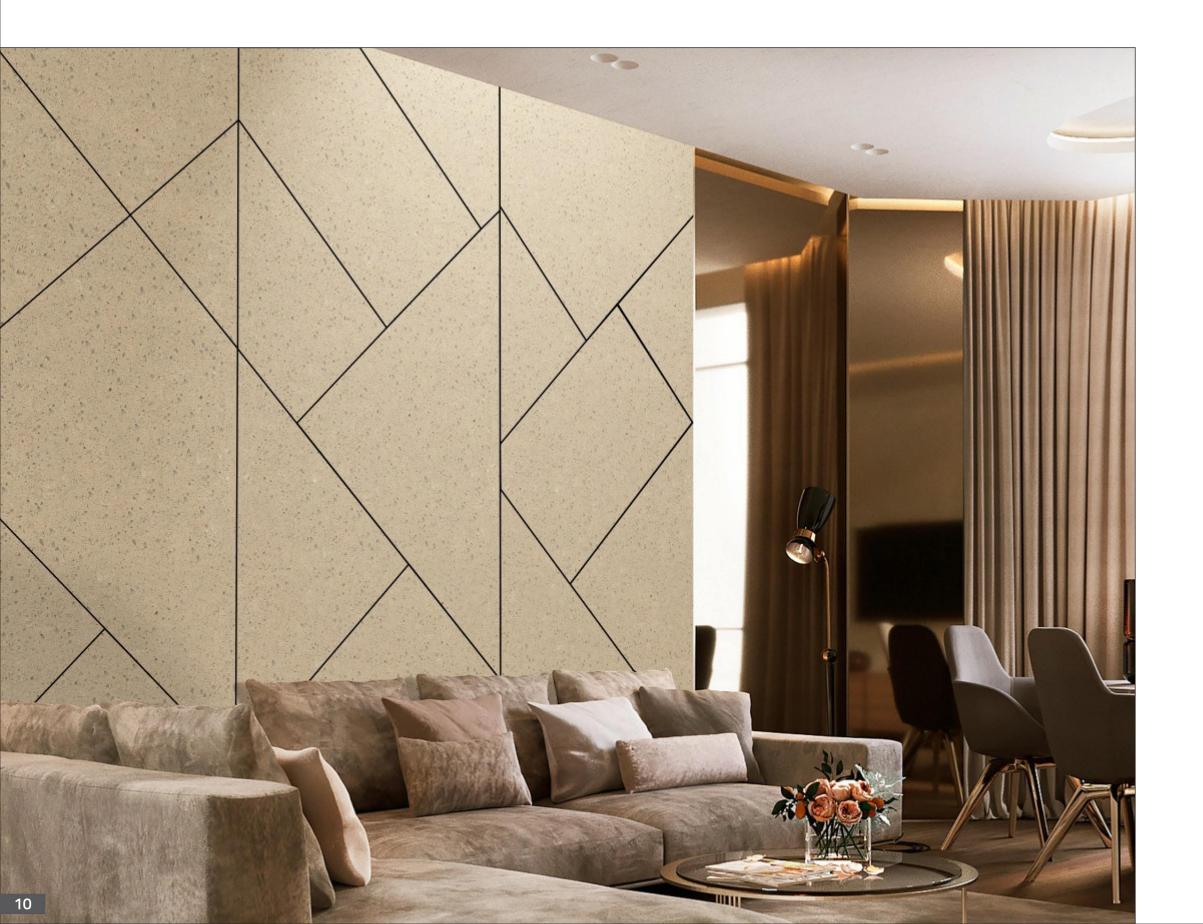



Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm

Finish Polished




















Special Order Size Available 300x300mm | 400x400mm | 300x600mm | 600x600mm

Size 3200x1600mm | 3200x800mm | 3075x1450mm | 3075x725mm

Ice White





Thickness Finish
30mm | 20mm | 18mm | 15mm | Polished
12mm | 10mm | 8mm



30mm | 20mm | 18mm | 15mm |

12mm | 10mm | 8mm

2004



Finish Polished

Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm

Finish Thickness
Polished 30mm | 20mm | 18mm | 15mm |
12mm | 10mm | 8mm




















ICE SERIES

Special Order Size Available 300x300mm | 400x400mm | 300x600mm | 600x600mm





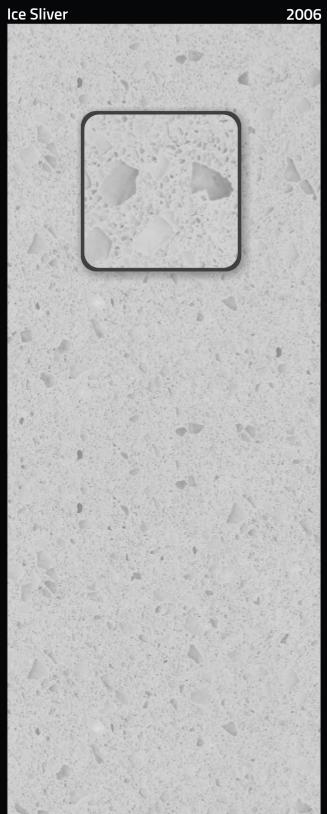

Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm


















HONEY SERIES

Size 3200x1600mm | 3200x800mm | 3075x1450mm | 3075x725mm



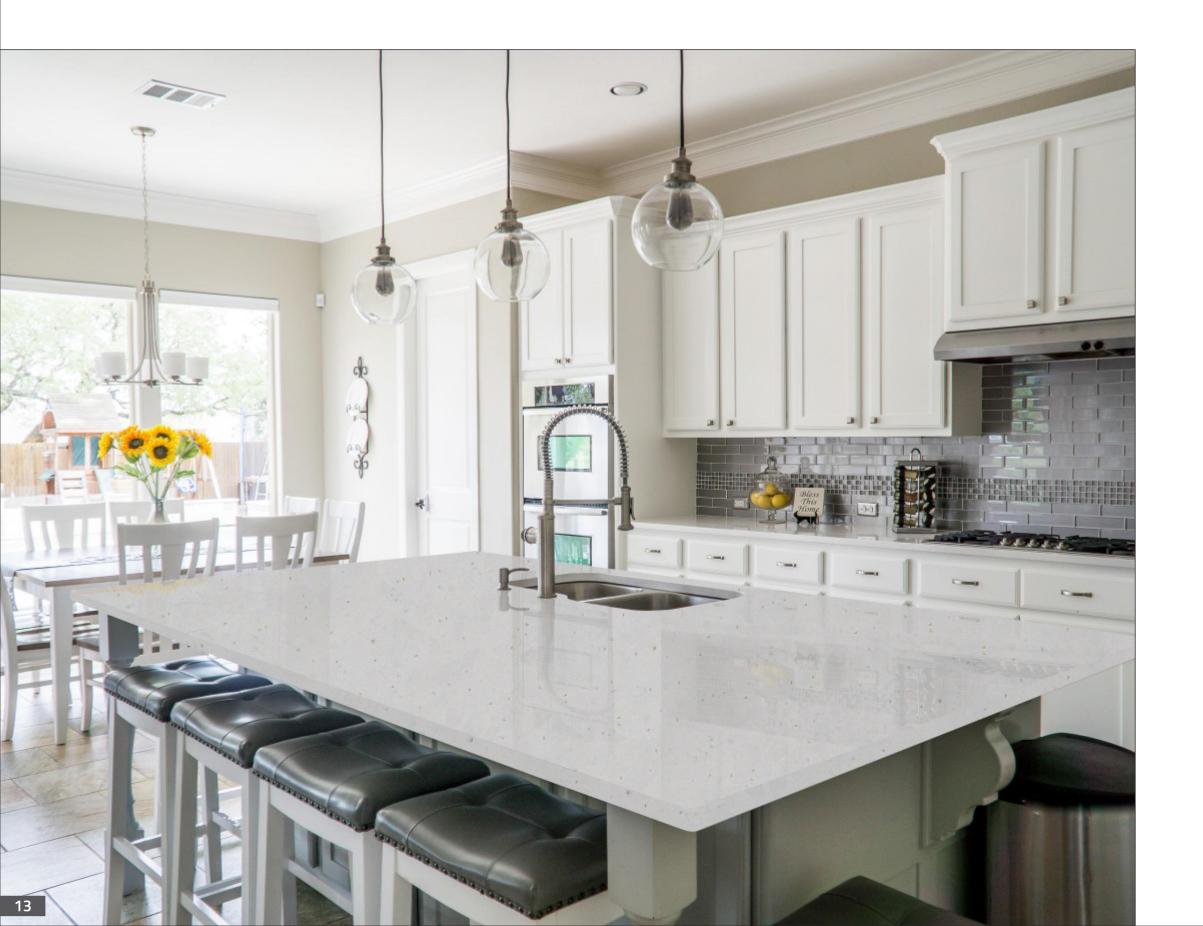



Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm

Finish Polished



















Honey White

HONEY SERIES

Size 3200x1600mm | 3200x800mm | 3075x1450mm | 3075x725mm

Special Order Size Available 300x300mm | 400x400mm | 300x600mm | 600x600mm

3003





Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm



Finish Polished Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm


















SANDY SERIES



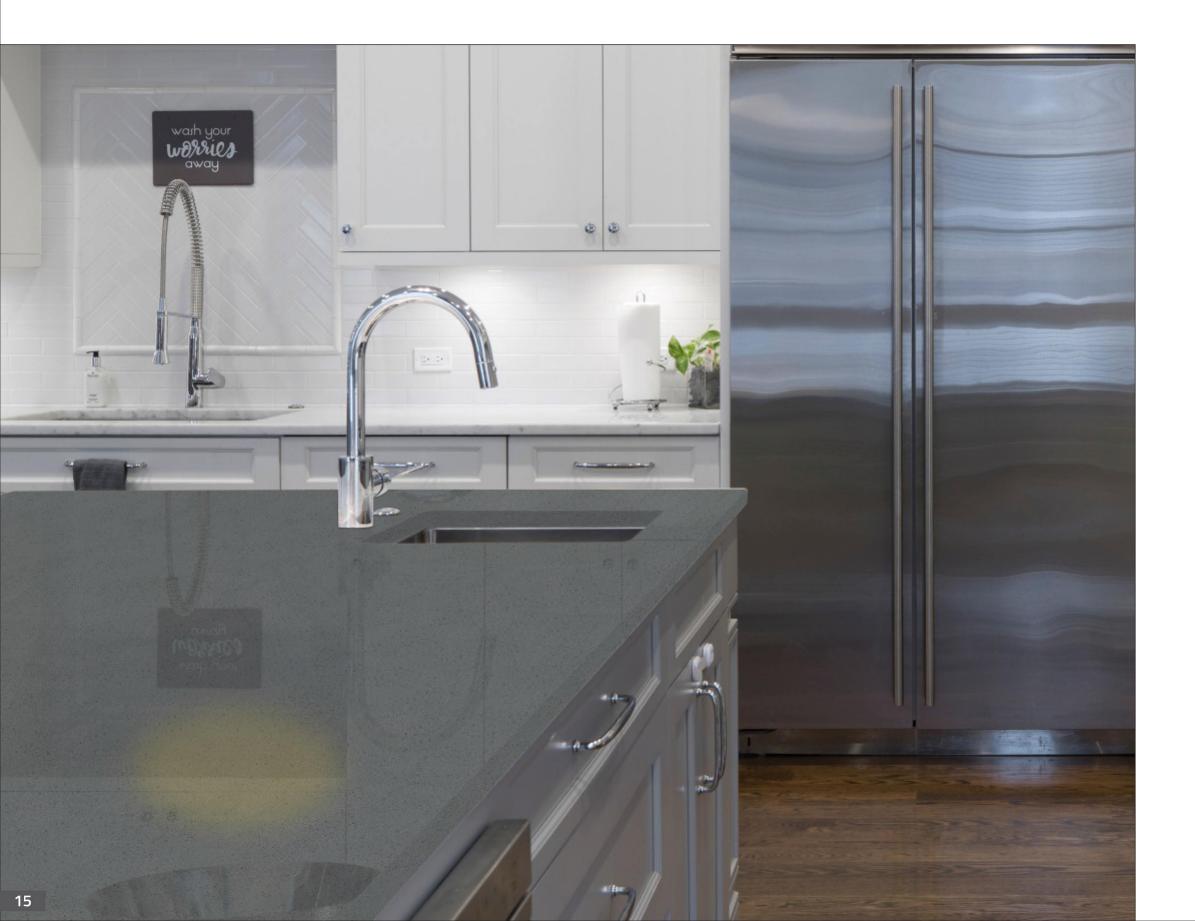



Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm

Finish Polished



















SANDY SERIES

Size 3200x1600mm | 3200x800mm | 3075x1450mm | 3075x725mm






Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm



Sandy Tusk 4004 Thickness

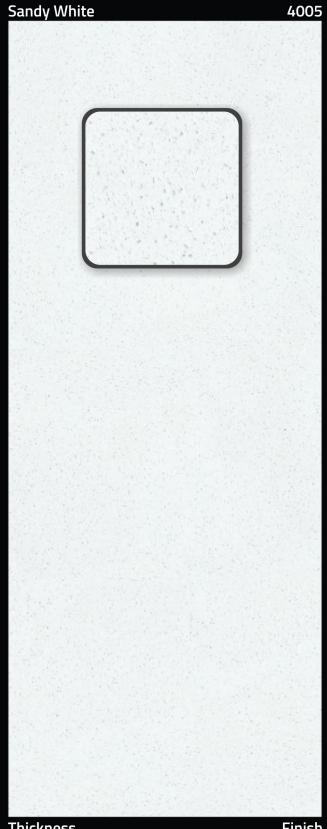

















Sandy Brown



SANDY SERIES

Size 3200x1600mm | 3200x800mm | 3075x1450mm | 3075x725mm

Special Order Size Available 300x300mm | 400x400mm | 300x600mm | 600x600mm

4007





Thickness 30mm | 20mm | 18mm | 15mm | 12mm | 10mm | 8mm



















FROST SERIES

Size 3200x1600mm | 3200x800mm | 3075x1450mm | 3075x725mm





Thickness Finish
30mm | 20mm | 18mm | 15mm | Polished
12mm | 10mm | 8mm


























Special Order Size Available 300x300mm | 400x400mm | 300x600mm | 600x600mm





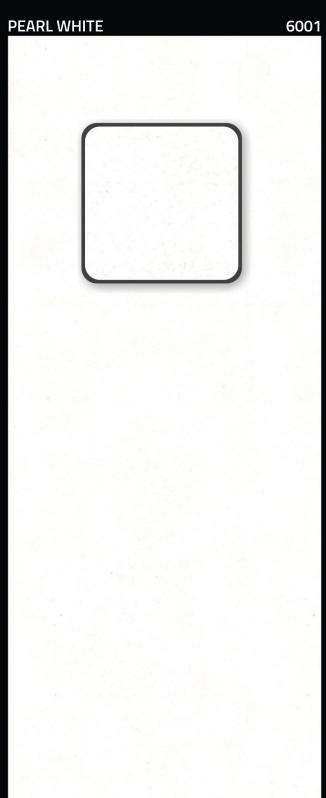

QUARTZ STONE (Siliceous Base)

| Test Performed | Test Standard | Results |
|------------------------------------|---------------|--|
| App. Density Kg/dm3 | EN14617-1 | 2.2 -2.45 |
| Water Absorption | EN14617-1 | <0.04 |
| Flexural Strength (Mpa) | EN14617-2 | 50 - 60 |
| Dimensional Stability | EN14617-12 | Class A |
| Impact Resistance (joule) | EN14617-9 | 4 - 9 Joule |
| Compressive Strength (Mpa) | EN14617-15 | 170 -220 |
| Abrasion Resistance | EN14617-4 | Groove Length=21.1mm |
| Frost Resistance | DIN 52104 | Complies With Standard |
| Surface Hardness (Mohs Scale) | EN 101 | 6.0 -7.0 |
| Stain Resistance | ANSI Z124.6 | Pass |
| Wear & Cleanability | ANSI Z124.6 | Pass |
| Chemical Resistance | ANSI Z124.6 | Pass |
| Chemical Resistance | EN14617-10 | Class C4 |
| Resistance To Acids | ASTM C 650 | Not Affected |
| Linear Thermal Expansion (30-60) C | EN14617-11 | 2.6x10 |
| Boiling Water Resistance | NEMA LD3-3.6 | Pass |
| High Temperature Resistance | NEMA LD3-3.6 | Pass |
| Cigarette Test | ANSI Z124.6 | Pass |
| Fire Classification | EN13401-1 | Wall Cladding B-fl-81 |
| | | Flooring & Stairs: B-fl-S1 |
| Slip Resistance | EN 14231 | Wet: 13-21 SRV, Dry: 43-53 SRV |
| Rediation | GB 6566-2010 | Complies 'With Requirement Of Standard |
| Thermal Shock Resistance | EN14617-6 | No Visual Defects After 10 Cycle. |
| | | Loss in Flexural Strength = Loss in Mass = 0.02%-0.05% 0.7%-1.1% |
| Freeze & Thaw Resistance | EN14617-5 | No Defects After-05 Freeze-Thaw Cycle |
| Glossiness Reflection | % | 45-70 |
| Surface Slip, Resistance HONED 400 | DIN 51130 | R9 |
| Staic Coefficient Of Friction | ASTM C 1028 | Dry: 0.8, Wet: 0.6 |

SLAB SIZE :- 1600 x 3200mm | 1600 x 800mm | 1450 x 3050mm | 725 x 3050mm **SPECIAL ORDER SIZE AVAILABLE :- 300x300mm | 400x400mm | 300x600mm | 600x600mm** THICKNESS:- 8mm (0.8cm) | 10mm (1cm) | 12mm (1.2cm) | 15mm (1.5cm) | 18mm (1.8cm) | 20mm (2cm) | 30mm (3cm)

Customized size is available on request



APPLICATIONS



Full Bullnose



1/2" Beval



1/2" Beval T&B



Acrylic Lining

Demi Bullnose



1/2" Bullnose



1/2" Round T&B



Spill Free Edging