

DISCOVER
THE **VIGOUR** AND
GRACE IN YOUR
SPACE

Product Size

600x
600mm

OUR USPS

A design that has evolved over time with unique features like durability, strength, resilience, scratch-proof, slip-resistant, and the ability to withstand severe weather conditions and heavy footfall.

CERTIFICATES



The History of Creation

Taking the credit of being one of the youngest and boldest brands of the Ceramic Industry of India, we believe in pushing the boundaries of design and innovation through the finesse of craftsmanship that adds a complementary perspective to architectural designs and the interiors – bringing life to your spaces.

The rapid growth in the interior designing and outdoor designing amongst the designers and customers inspires our team to manufacture the best ceramic tiles that meet the client and market demands in both, domestic and international markets.

Give your spaces a sense of serenity with nature-inspired and easy-to-maintain tiles that bring elegance and earthiness of natural materials.

OUR STRENGTH



OUR MISSION

Our mission is to exceed client expectations to provide premium services and quality products at cost-effective prices.



OUR VISION

Our vision is to design, manufacture, and deliver innovative products and services and enhance the lifestyle of our customers.



CORE VALUE

Our values direct us to become a premier ceramic company and grow strong through strategic vision, operational excellence, structural consolidation and collaborative teamwork to exceed the expectations of our customers, suppliers, employees and stakeholders alike.

Feel the
Impeccable
strength and
shine

Available in
**Glossy
Finish**



Technical Specifications



95%
Reflection




Water
Repellent



Formidable
Strength



Stain
Resistant

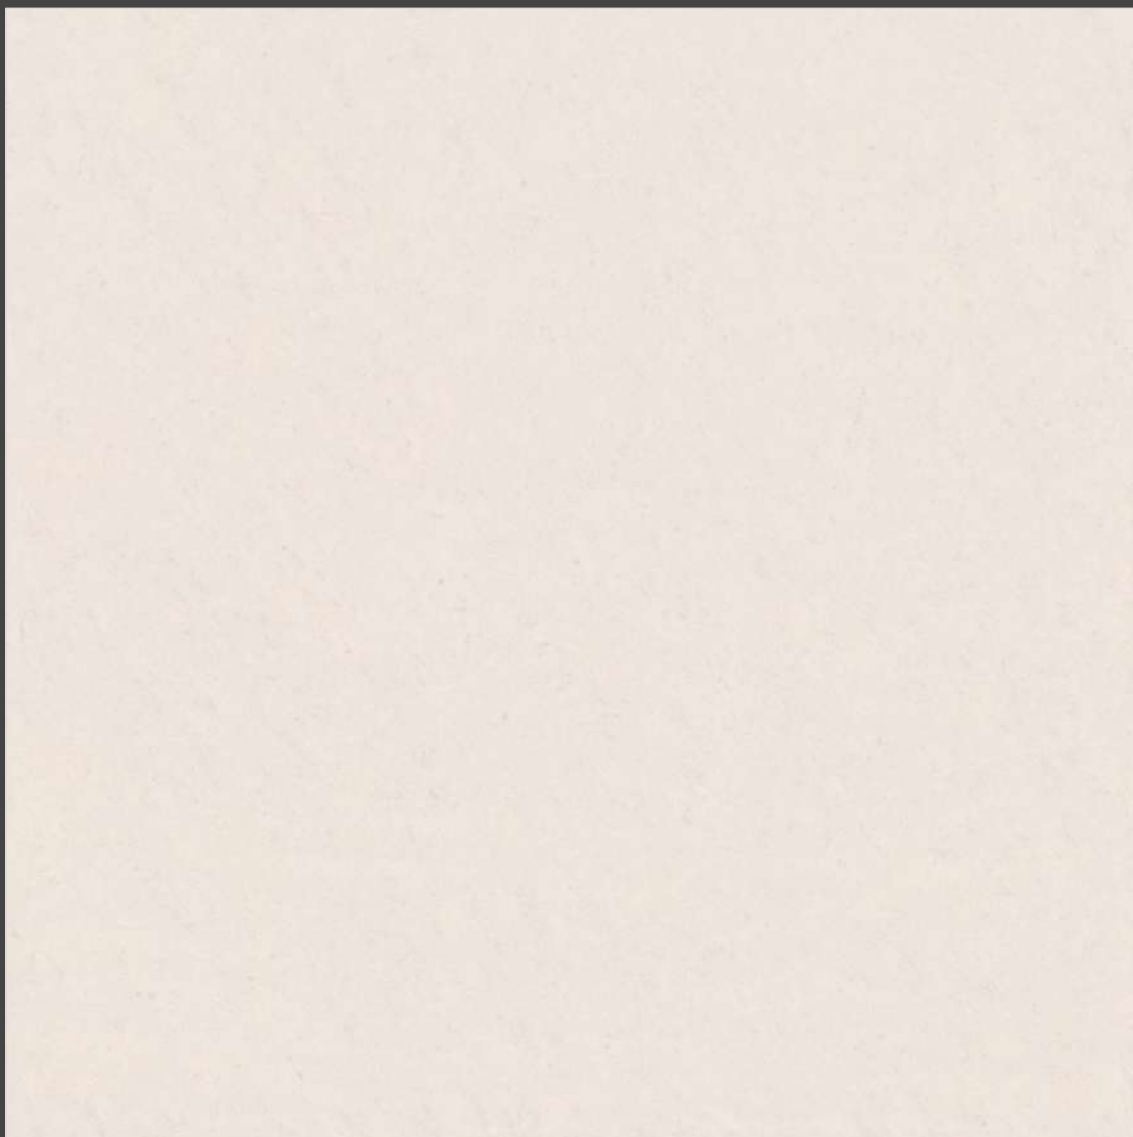

Imperial White

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness





Imperial Gold

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness





Imperial Crema


**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



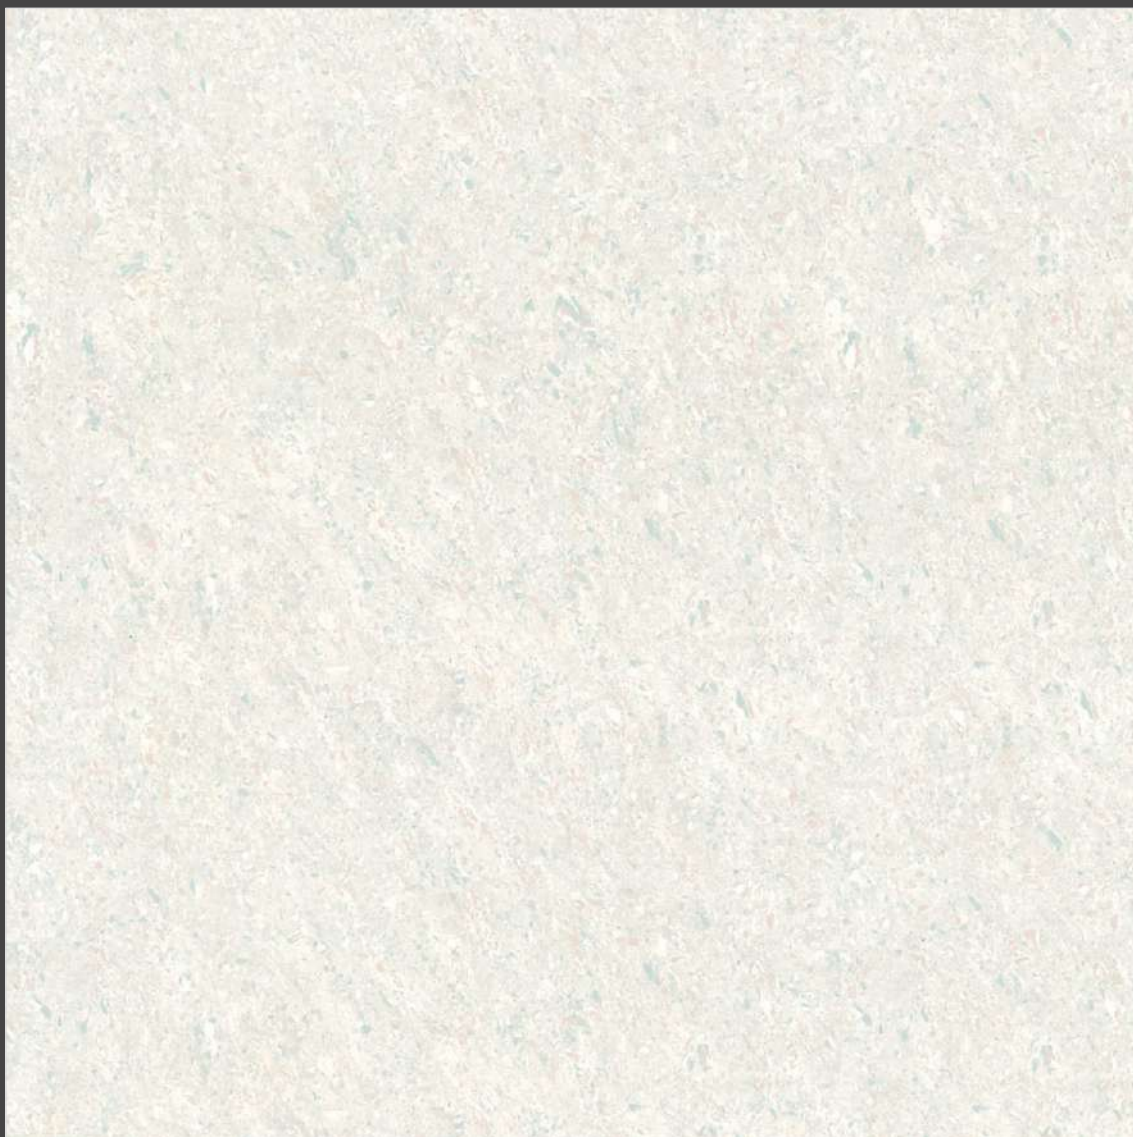


Imperial Pista

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness

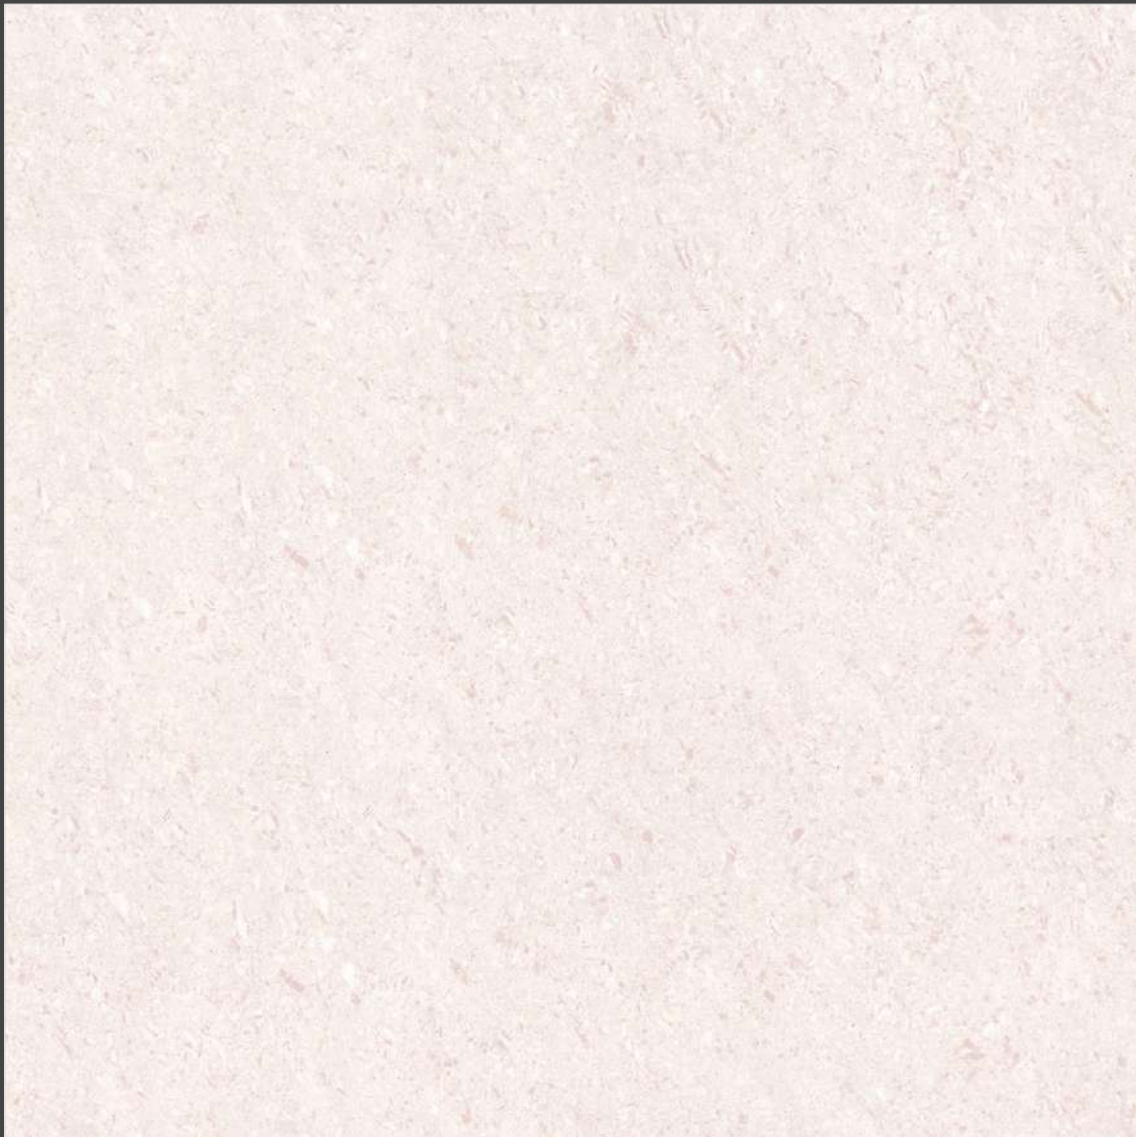

Imperial Pink

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



Imperial Cadbury

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness





Imperial Stone

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



Imperial Ash

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness





Imperial Bronze

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness





Imperial Sapphire

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



Imperial Majestic

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness





Armani White


**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



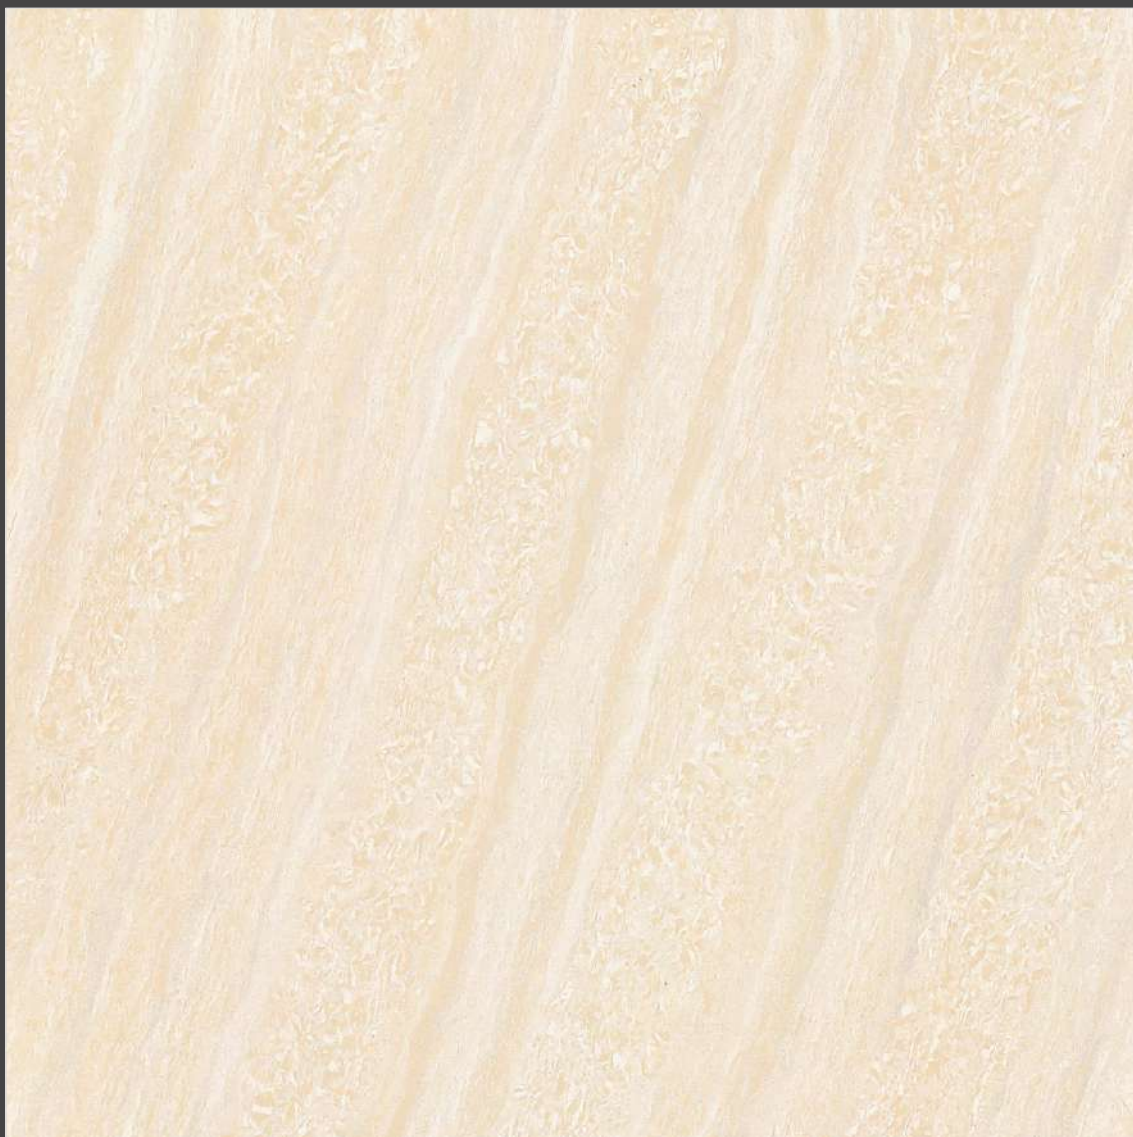

Armani Gold


**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



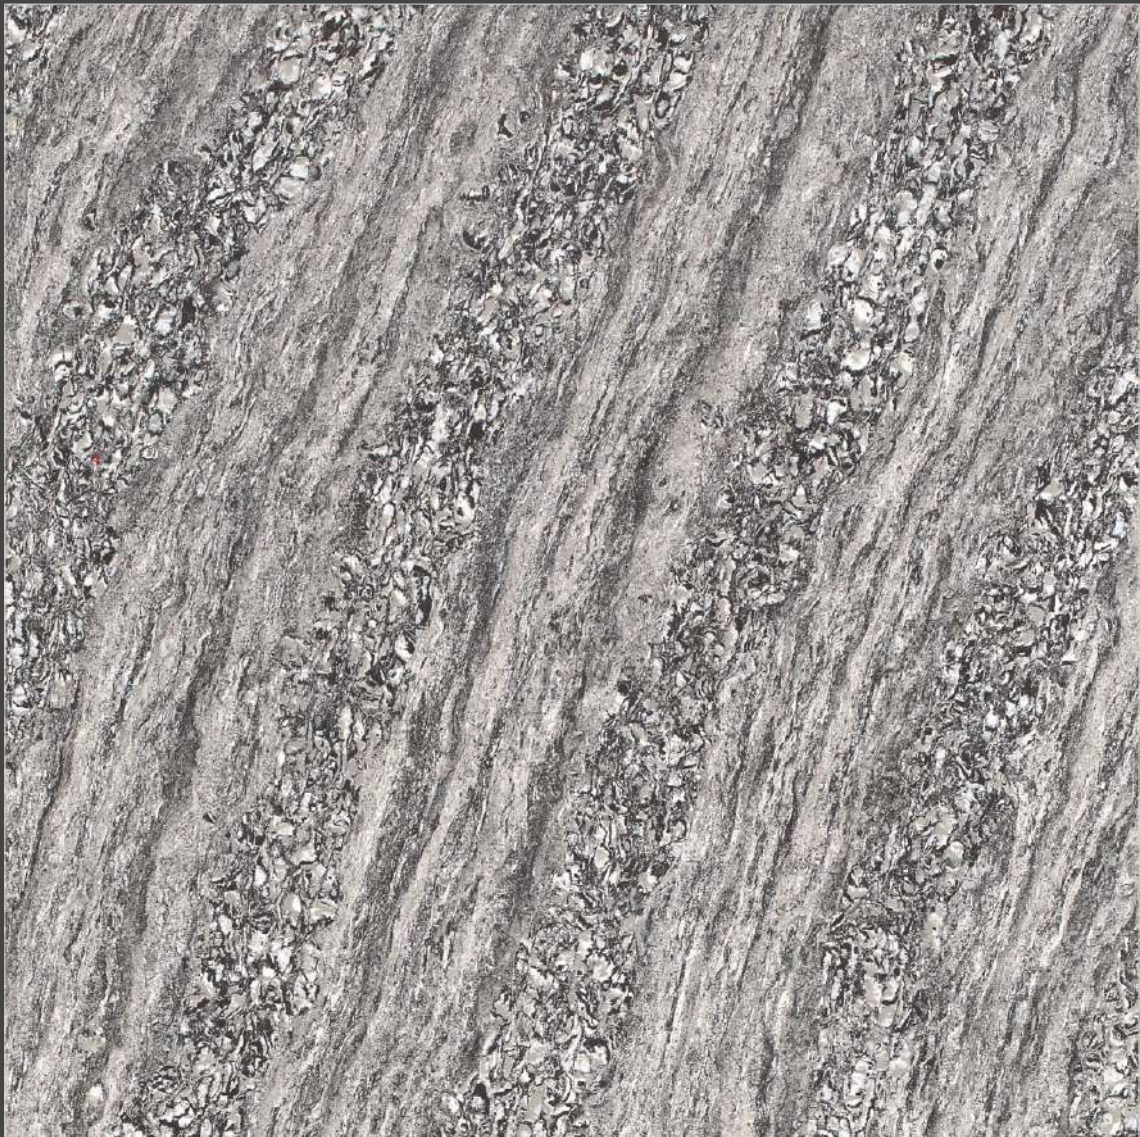

Armani Ash


**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



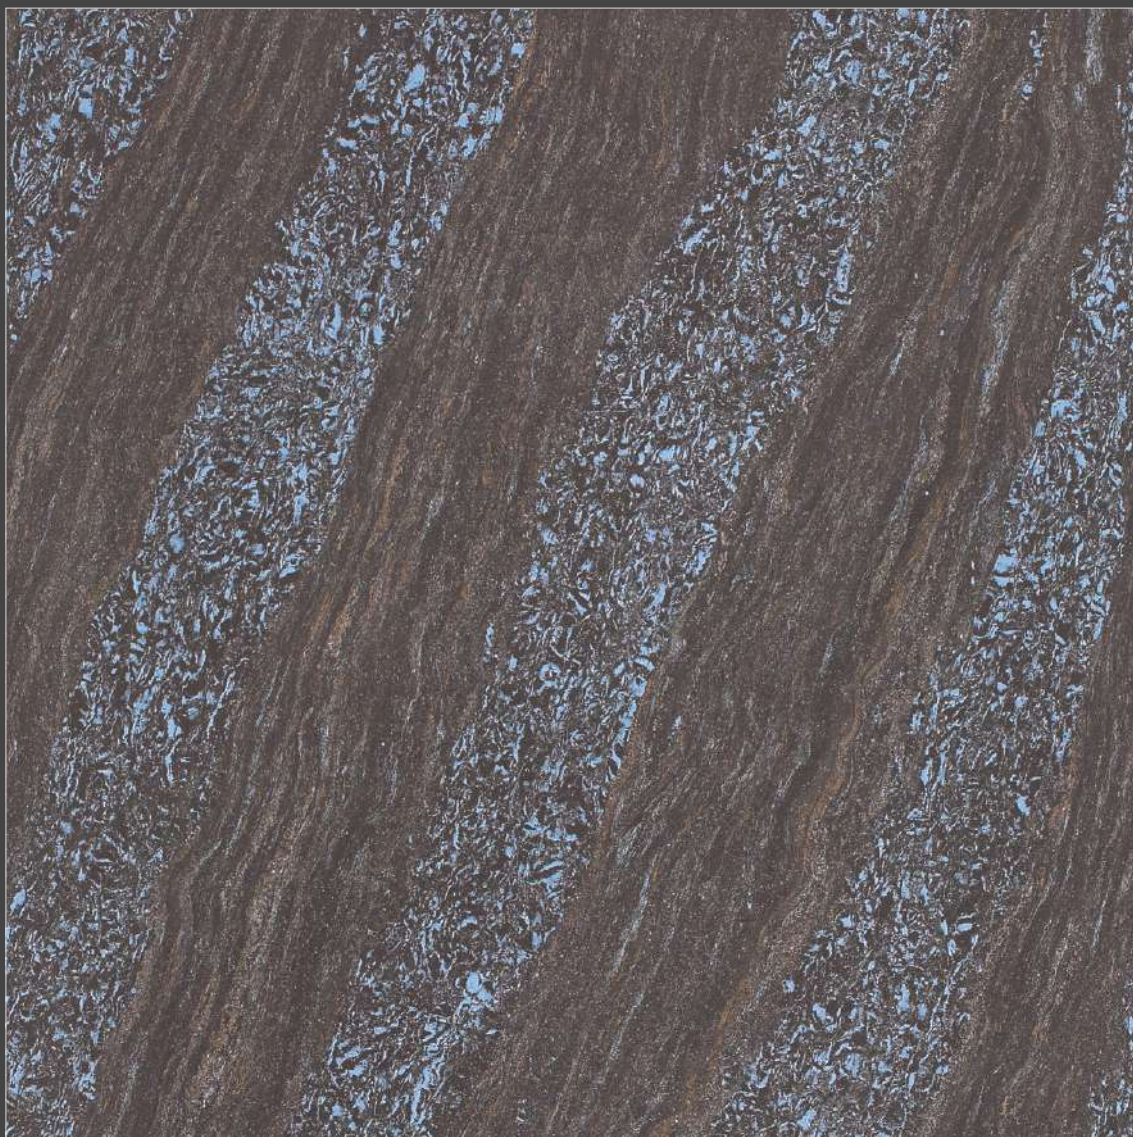

Armani Aqua


**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



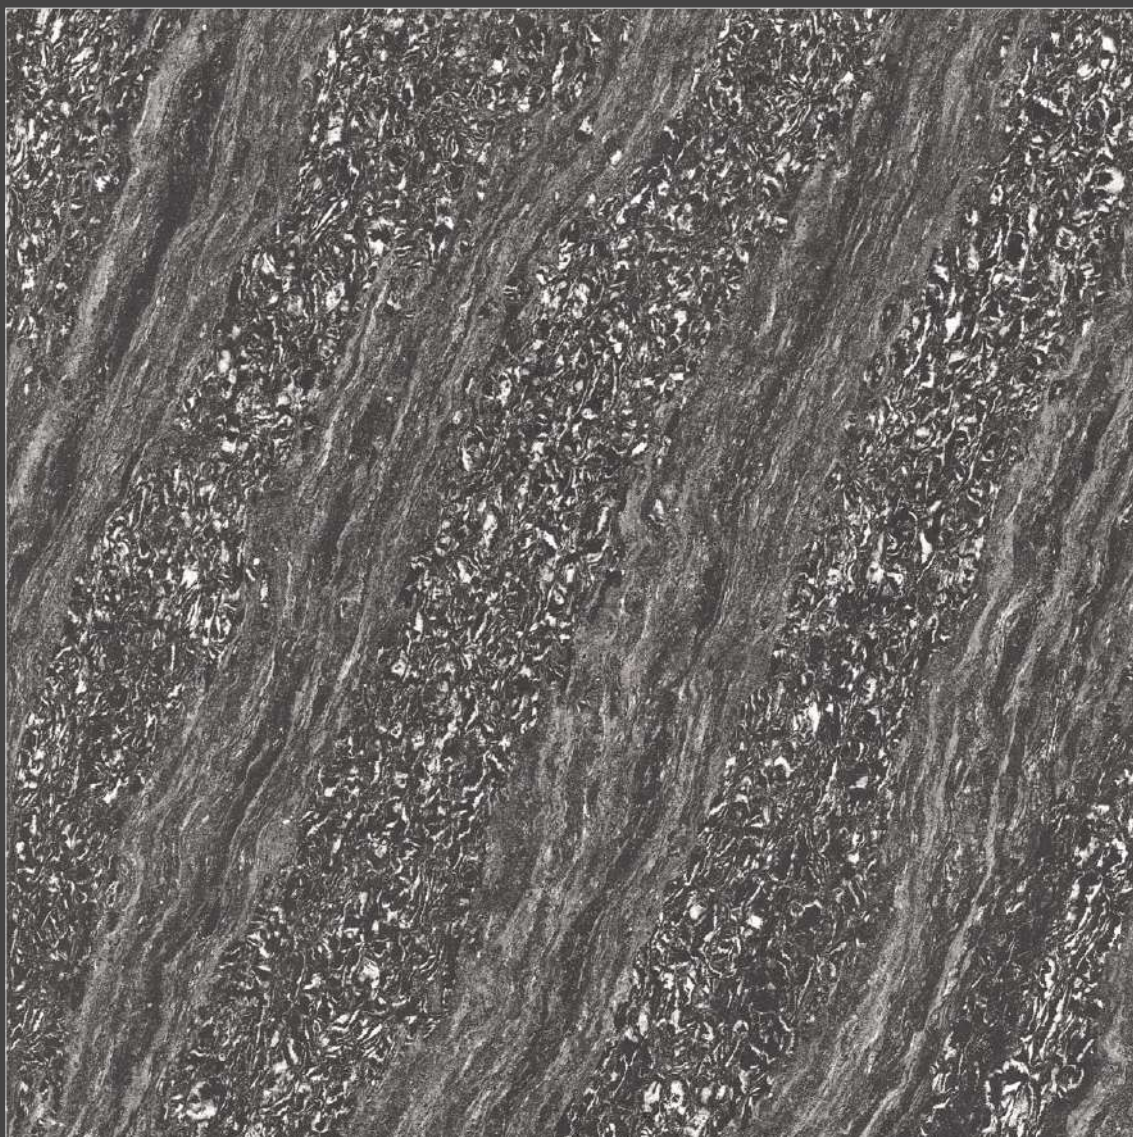

Armani Black

**Double
Charge**
Vitrified
Tiles

**600x
600mm**

**Glossy
Finish**

8mm
Thickness



TECHNICAL SPECIFICATION

PROPERTY	International Std. ISO 13006/EN 176 Group Bla	OUR TILES VALUE	METHOD OF TESTING
Deviation in Length	± 0.6%	± 0.1%	EN 98
Deviation in Thickness	± 0.5%	± 0.1%	EN 98
Straightness of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.2%	EN 98
Water absorption *	< 0.5%	< 0.05%	EN 99
Mohs hardness *	> 6	> 6	EN 101
Flexural Strength *	> 27 N/mm ²	> 40 N/mm ²	EN 100
Abrasion resistance	< 204 mm ³	< 144 mm ³	EN 102
Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
Breaking Strength *	1113 N	2500 N	ASTM C-648
Density (g/cc)	> 2	> 2.4	DIN 51082
Frost resistance	Frost proof	Frost proof	EN 202
Chemical Resistance	No damage	No damage	EN 106
Thermal Shock Resistance	No damage	No damage	EN 104
Colour Resistance	No damage	No damage	DIN 51094
Thermal Expansion	< 9x10 ⁻⁶	< 9x10 ⁻⁶	EN 103
Stain Resistance	Resistant	Resistant	ISO 10545-14
Moisture Expansion	Nil	Nil	ISO 10545-10
Glossiness	-	89% Reflection	Glossmeter

PACKING DETAILS

SIZE	THICKNESS	NO. OF TILES/BOX	COVERAGE AREA/BOX		WT. OF BOX
600x600mm	8 mm	4 pcs.	1.44 sq. mtr.	15.50 sq. ft.	25.5 kg. (approx)

