


PIN TERMINALS

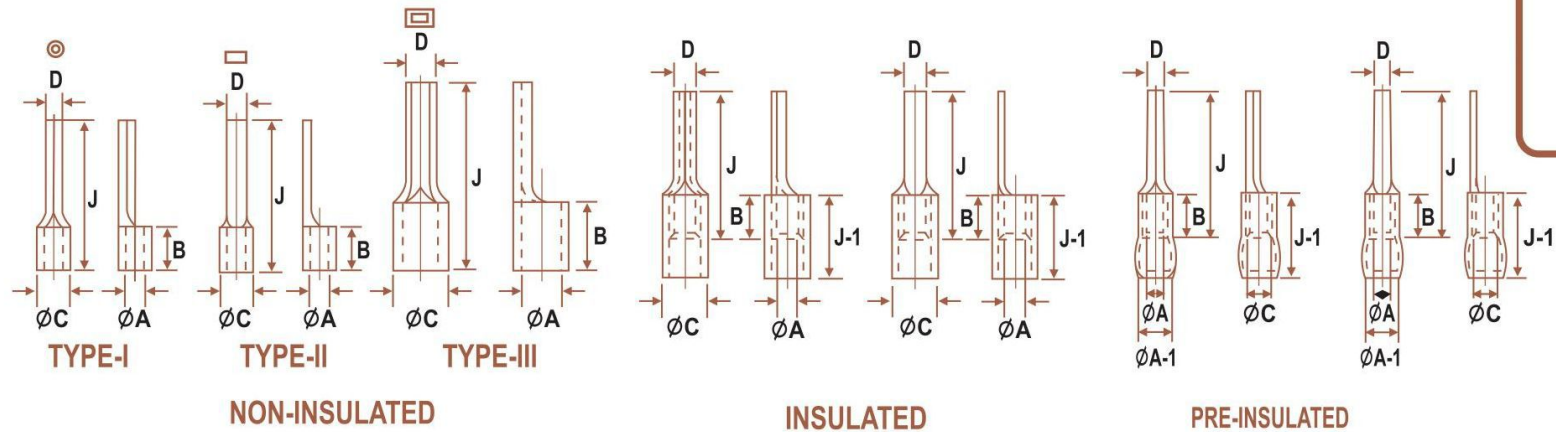

MATERIAL : ELETROLYTIC COPPER FINISH : ELECTRO TINNED

Sr.No.	AREA MM ²	A	C	D	F	E	B	G+H	J	CAT NO.	TYPE	INSULTED	PRE INSULATED
1	1.5	1.6	3.2	1.9	0.8		5	10	17	KK-9	I	KK-17	KK-26
2	1.5	1.6	3.2	2	0.8		5	10	17	KK-35 B	II	KK-40 B	KK-42 B
3	1.5	1.6	3.2	3.1	0.8		5	10	17	KK-35	II	KK-40	KK-42
4	1.5	1.6	3.2	3.1	0.8		5	13	20	KK-35A	II	KK-40A	KK-42A
5	2.5	2.3	3.9	1.9	0.8		5	10	17	KK-1	I	KK-18	KK-27
6	2.5	2.3	3.9	1.9	0.8		5	13	20	KK-1 A	I	KK-18A	KK-27A
7	2.5	2.3	3.9	3.1	0.8		5	10	17	KK-2	II	KK-19	KK-28
8	2.5	2.3	3.9	2	0.8		5	13	20	KK-2 B	II	KK-19 B	KK-28 B
9	2.5	2.3	3.9	3.1	0.8		5	13	20	KK-2 A	II	KK-19A	KK-28A
10	4	2.9	4.9	2.7	1.0		6	10	20	KK-3	I	KK-20	KK-29
11	4.6	3.6	5.6	5.1	1.0		6	10	20	KK-4	I	KK-21	KK-30
12	4.6	3.6	5.6	2.7	1.0		6	10	20	KK-5	II	KK-22	KK-31
13	6	4	6	2.7	1.0		6	10	20	KK-6	I	KK-23	KK-32
14	10	4.5	6.7	4.3	1.1	2.4	8	12	22	KK-7	III	KK-24	
15	16	5.8	8.2	5.5	1.2	2.6	10	13	26	KK-8	III	KK-25	
16	25	7.5	11.1	7	1.8	3.8	11	15	31	KK-86	III		
17	35	9	12.6	8	1.8	3.8	12	15	37	KK-87	III		
18	50	10.5	14.1	9	1.8	3.8	16	17	42	KK-88	III		
19	70	12	16	10	2.0	4.1	16	16	45	KK-94	III		
20	95	13.5	18.1	10	2.3	4.8	20	20	51	KK-95	III		